

RURAL WORKS DEPARTMENT



GOVERNMENT OF BIHAR

CIRCLE – R.W.D. works Circle, Kishanganj

DIVISION – R.W.D. works Division , Kishanganj-1

Name of Work :-	Restoration work for Repair of Road breaches (Damaged by Flood) for Motorability in Pmgsy Road to Malhana
Block :-	KISHANGANJ
Length of Road:-	1.0 KM
Damage Length:-	14.00 M
Estimated cost :-	Rs 53531.00

Year : 2024-25

INSPECTION REPORT FOR MOTORABLE WORK

Name of PIUs :- E.E Work div. Kishanganj-1
Name of Block/Road :- Kishanganj/PMUSY Road to Malhara

A. For Road

1. Damage Location/Chainage :- ch. 200 M
2. Damage Length :- 14.00 M
3. Nature of Damage (Length Wise)
 - (i) Breach :-
 - (ii) Crust Damage :- 14.00 M
 - (iii) Only Flank Damage :-
- Whether traffic fully/Partially obstructed :- Partially obstructed
4. Details of Restoration :-
 - i) Material Being Used in Restoration :- Brick bat
 - ii) Equipment/Tools Being Used in Restoration Works :- Tractor
 - iii) Restored Length

In open Area :-	14.00 M
In habitation Area :-	
 - iv) If Restoration work done in habitation Area give Reason :-

B. For Bridge (Size of Bridge/Culvert)

- 1) Damage Location/Chainage :-
- 2) No. of Span Damage :-
- 3) Length of Span :-
- 4) Nature of Damage (Pier/Abutment/
wing Wall/Approach Road Damage) :-
- 5) Details of Restoration :-
- 6) Material Being Used in Restoration :-
- 7) Equipment/Tools Being Used in Restoration Works :-
- 8) Restored Length :-

Overall Grade of Restoration work (Satisfactory/Unsatisfactory) :-

Compd
12/11/24
12/11/24
AE

12/11/24
Signature of Inspector
(Official Seal)

Name of Work:- Restoration work for Repair of Road breaches (Damaged by Flood)
for Motorability in PMGSY Road to Malhana

TECHNICAL REPORT

Blcok:- Kishanganj

Estimated Cost :- 53531.00


The work done estimate has been framed for the restoration (motorable) of traffic for the above road which was damage/washout during the year 2024-25 flood. This Estimate is prepared for restoration work under FDR as per the instruction of Engineer-in-Chief Rural Works Department Patna Vide Letter No. FDR-03-01/2024-89


(A) Source of materials

- i) Brick Bats- Local Kiln
- ii) Fine sand-Local
- iii) Cement bags-Local market
- iv) Bamboo-Local
- v) Eart- Private land from 1000m lead
- vi) Hume pipe- Purnea

(B) Rate Carraige has been analyzed on minimum lead. Finished rate has been calculated without contractor's profit on MORD norms. Carraige of materials has been added to finished rate. Basic rates are evaluated from rate of approved by State schedule rate committee. 18% GST, 1% L.cess and S.fee has been added in the estimate with final rate of the executed items


JE 12/11/24
RWD(W) Sub Division
Kishanganj



AE
RWD(W) Sub Division
Kishanganj


Executive Engineer
RWD(W) Division
Kishanganj-1

ABSTRACT OF COST

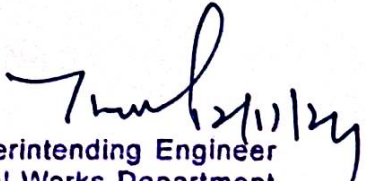
Name of Work :-		Restoration work for Repair of Road breaches (Damaged by Flood) for Motorability in Pmgsy Road to Malhana
Block :-		Kishanganj
Sl. No.	Particulars	Amount (In Rs.)
A	Cost of Restoration work :-	Rs 38531.00
B	Add Drone videography charge three times	Rs 15000.00
	Total Cost with GST, LC & S.Fee	Rs 53531.00


J.E. 12/11/24
RWD
Kishanganj


A.E. 12/11/24
R.W.D
Kishanganj


E.E. 12/11/24
R.W.D
Kishanganj - I


Technically approved for Rs 53531 (Rupees Fifty three thousand five hundred thirty one) only.


Superintending Engineer
Rural Works Department
Kishanganj Circle, Kishanganj
12/11/24
E.O.

Detailed Estimate

Name of Work :-			Restoration work for Repair of Road breaches (Damaged by Flood) for Motorability in Pmgsy Road to Malhana									
Sl. No.	SDB Sl. No.	MORD Ref.No	Description	No.	No.	Length (M)	Width (M)	Height (M)	Qty.	Unit	Rate (Rs.)	Amount (Rs.)
1	WRD	5.7.40	Brick bats									
			Providing laying and spreading brick bats in Road ditches all complete as per approved design, specifications and direction of E/I									
			At ch.200 m	1	1	14.00	(2.7+3.0)/2	0.35	13.97			
								Total:-	13.97	Cum	2759.12	38531.00
											TOTAL	38531.00


12/11/24
RWD
KISHANGANJ



12/11/24
A.E
RWD
KISHANGANJ


12/11/24
E.E
RWD
KISHANGANJ-1

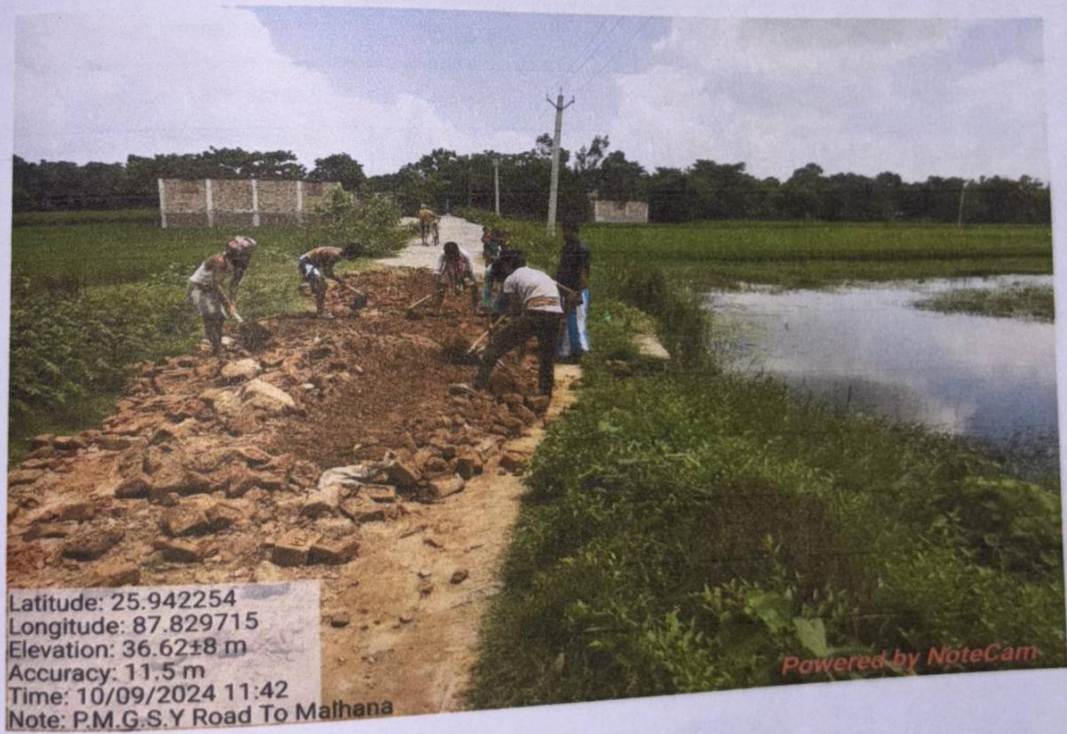



(M) 12/11/24
 02
 12/11/24
 95





 12/11/24
 2

12/11/24
 96




 12/11/24


 12/11/24

FINAL RATE UNDER WORKS CIRCLE KISHANGANJ

S..No	Discription of Item	Unit	Final Rate (Excluding GST, Seigniorage & L.Cess)	Final Rate (Including GST, Seigniorage & L.Cess)
1	EARTH WORK	CUM	459.003	549.740
2	BRICK BAT	CUM	2209.576	2759.115
3	G.S.B	CUM	4328.501	5172.300
4	SAND BAG (Cement Bag)	Each	46.550	55.880
5	BAMBOO PILE	Per Mtr.	58.140	69.186
6	BAMBOO CHACHRI	Per Mtr.	302.258	359.690
7	BAMBOO RUNNER	Per Mtr.	30.210	35.950
8	HUME PIPE (1000 mm Div)	Per Mtr.	6206.598	7385.850
9	HUME PIPE (600 mm Div)	Per Mtr.	2492.260	2965.790
10	STEEL DRUM SHEET	Per Sqr.Mtr.	215.352	256.270
11	GEO BAG WITH SAND	EACH	967.490	1152.320
12	EACH N.C. BAG WITH SAND (Cement Bag)	Each E.C	967.490	1151.800
13	LOCAL SAND	CUM	721.110	1272.780

[Signature]
Executive Engineer
RWD, Works Division
Kishanganj-1

[Signature]
Executive Engineer
RWD, Works Division
Araria

[Signature]
Executive Engineer
RWD, Works Division
Kishanganj-2

[Signature]
Executive Engineer
RWD, Works Division
Forbesganj

[Signature]
Superintending Engineer
Rural Works Department
Works Circle Kishanganj