



ग्रामीण कार्य विभाग

Rural Works Department, Govt of Bihar

BIHAR RURAL ROADS PROJECT

Bihar Rural Development Agency (BRRDA)

PLAN HEAD :- F.D.R. 2245

YEAR (2024-25)

State :- BIHAR
District :- Motihari
Block :- Chiraiya

Chiraiya Semra Se Shikarganj

Actual Length of Road	=	8.100 Km
Flood affected Length of Road	=	0.218 Km
TOTAL COST OF PAVEMENT	Rs	1,18,24,963.00
TOTAL PROJECT COST	Rs	1,18,24,963.00
9184565.00		

Submitted By:
Executive Engineer
RWD (W) Division, Shikaharna, Dhaka

Prepared By:
Executive Engineer
RWD (W) Division, Shikaharna, Dhaka

तकनीकी प्रतिवेदन

योजना का नाम:- *chiraiya senua se shikarganj.*

क्षतिग्रस्त पथ की लम्बाई:- 0.218 K.M.

प्राक्कलित राशि:- 1,18,24,963.00

योजना शीर्ष :- **3054/2245 F.D.R.**

प्राधिकार :- सचिव, ग्रामीण कार्य विभाग, बिहार, पटना का मु0अ0-4(मु0) विविध
(कार्य)-06-109/2024-1956 दिनांक-28-05-2024

प्रतिवेदन

प्रस्तुत प्राक्कलन अतिवृष्टि/बाढ़ के कारण क्षतिग्रस्त पथ के पथांश का प्राक्कलन

मात्र के लिए ग्रामीण कार्य विभाग, कार्य प्रमण्डल *Dhaka*..... के
रा शीर्ष F.D.R. 3045 के अन्तर्गत तैयार किया गया है।

पथ के आवस्मिक मरम्मति हेतु पथांशों में मिट्टी भराई, खाली सिमेंट बैग में लोकल बालु भरकर,
स का फइल, बॉस का चचरी, बॉस का रनर, ह्यूम पाइप एवं ब्रिक बेट इत्यादि से भरकर बचाव कार्य
रुते हुए यातायात पुर्नस्थापित किया गया है।।

पथ मरम्मति कार्य का प्राक्कलन वर्तमान अनुसूचित दर एवं सामग्री की दुलाई निकटतम खदान से
वधान कर बनाया गया है। दर गणना में संवेदक लाभांश सम्मिलित नहीं है।

प्राक्कलन तकनीकी स्वीकृति हेतु अपेक्षित है।

28-7-24
कनीय अभियंता
ग्रामीण कार्य विभाग

28/7/24
सहायक अभियंता
ग्रामीण कार्य विभाग

28/7/24
कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमण्डल,

SUMMARY OF COST ESTIMATE FOR THE PROJECT

NAME OF ROAD :- Chiraiya Semra Se Shikarganj
 DISTRICT :- Motihari
 BLOCK :- Chiraiya
 Actual Length of Road :- 8.100 Km
 Flood Affected Length of Road :- 0.218 Km

		Lead=	7.0 Km	+	1.00 Km	
					Amount (In ₹)	
Sr. No.	Description					
	Brick bats Total Qty. in m³ = 4400.000 ^{3362.375} @ 1,901.18					₹ 83,65,201.00 ^{62,784.16}
1	Cost of Brick Bat Materials=					₹ 83,65,201.00 ^{62,784.16}
2	Cost of HP NP3 Pipe and earth work					₹ 10,44,595.00
3	Add Labour Cess @ 1%=					₹ 1,23,586.20 ^{1,23,586.20}
4	S.F. @10% on material (Brick Bats + Sand)=					₹ 3,34,951.00 ^{3,34,951.00}
5	Add GST @18% (1+2+3+4)					₹ 18,03,808.00 ^{14,08,055.00}
TOTAL RESTORATION COST OF THE PROJECT IN Rs.						₹ 2,18,24,963.00 ^{91,84,565.00}

[Signature]
 28.7.24
 Junior Engineer

RWD (W) Division, Shikaharna, Dhaka

[Signature]
 28/7/24
 Assistant Engineer

RWD (W) Division, Shikaharna, Dhaka

[Signature]
 28.7.24
 Executive Engineer

RWD (W) Division, Shikaharna, Dhaka

T.A./T.S. is accorded for Rs. 91.85 000
(.....) crore. Ninety one lacs Eighty five thousand
..... hundred.....) only

Clerk
30/11/2014
S.E. (R.W.D.)
Works Circle
Mothar

(Signature)
31/11/14
As

Estimate for Temporary Restoration of Flood affected Road

Name of Road:- Chiraiya Semra Se Shikarganj

BLOCK :- Chiraiya

District:- Motihari

A) SUB HEAD : BRICK BATS

Laying & Distribution of Brick bats on affected Road portion as per specification to meet the required slope and proper light Ramming from a specified lead as per direction of E/I.

SI No	Chainage		Unit	Nos.	Length (m)	Width (m)	Height / Thick. (m)	Qty. (m³)	Rate (In ₹)	Amount (In ₹)
	From	To								
1	At Ch 2.8Km		Cum	1.00	30.00	3.75	1.00 ✓	112.500	1,901.18	2,13,883.00
			Cum	1.00	10.00	3.75	0.80 ✓	30.000	1,901.18	57,035.00
2	At Ch 3.0Km		Cum	1.00	30.00	5.00	2.00 1.55 ✓	300.000 322.500	1,901.18	5,70,355.00
			Cum	1.00	30.00	5.15	1.50 1.58 ✓	291.750 325.825	1,901.18	4,40,599.00
3	At Ch 3.0Km		Cum	1.00	5.00	4.45	1.00 ✓	22.250	1,901.18	42,301.00 ✓
4	At Ch 3.6Km		Cum	1.00	30.00	8.25	1.00 ✓	247.500	1,901.18	4,70,543.00 ✓
5	At Ch 3.6Km		Cum	1.00	5.00	8.50	2.10	89.250	1,901.18	1,69,680.00 ✓
			Cum	1.00	18.00	9.75	2.00 4.35 ✓	103.000 763.925	1,901.18	20,01,945.00
			Cum	1.00	30.00	9.75	2.50 4.95 ✓	1316.250 862.875	1,901.18	25,02,431.00
			Cum	1.00	30.00	8.75	2.80 2.80 ✓	997.500 654.750	1,901.18	18,96,429.00
					218.000			400.000 200.000		62,78,415 ✓
(A) Gross Amount In ₹ =										83,65,201.00

4,42,025 = 0

5,43,405 = 0

14,51,410 = 0

16,40,482 = 0

12,47,651 = 0

62,78,415 = 0

B) SUB HEAD : HP Culvert-1000mm dia

Providing and Laying Reinforced Cement Concrete Pipe NP3 as per design in Single Row

At Ch 3.6Km	No.	5	8	40	6,428.45	2,57,138.00
(B) Gross Amount In ₹ =						2,57,138.00

28.7.24

28/7/24

Block :-
District:-

Chiralya
Motihari

Flood affected Length of the Road:- 0.215 KM
Actual Length of the Road:- 8.100 KM.

Sl No	Item	Unit	Source	Carriage Cost & Lead in Km		Loading & Unloading Cost	Carriage Cost by Rail Head	Total
				Pucka/ Surface	Katcha surface			
1	Brick Bats	800 Nos	Local	$\frac{3.60}{2.25} \times 20.39 \times 7.00 \text{ Km} = \text{Rs } 228.37$	$\frac{3.60}{2.25} \times 31.86 \times 1.00 \text{ Km} = \text{Rs } 50.98$	193.52		472.86

Cost of Haulage Excluding Loading & Unloading as per SOR

Type of Road	Per Ton. Km by Tractor
For Surface Road	20.39
Unsurface Gravel Road	25.48
Kachha Road	31.86

* Subjected to Verification of Lead

28.7.24
Junior Engineer

RWD (W) Division, Shikaharna, Dhaka

28/7/24
Asstt. Engineer

RWD (W) Division, Shikaharna, Dhaka

28.11.24
Executive Engineer

RWD (W) Division, Shikaharna, Dhaka

Analysis of Rate

Sl No.	SOR No.	Description	Unit	Qty	Rate(Rs.)	Amount (Rs.)
Carriage of materials (By Tractor)						
1	1.4	Cost of Haulage excluding Loading & Unloading				
	RCD	Haulage of materials by Tractor excluding cost of loading, unloading and stacking.				
		Unit = t.km				
		Taking output 3.60 Tonne load and lead 10 km = 36.0 t.km				
		Case-I : Surfaced Road				
		Speed with load: 15 km per hour				
		Speed while returning empty: 25 km per hour				
		a) Machinery				
		Tractor 3.6 t capacity				
		Time taken for onwads haulage with load	hour	0.667	688.00	458.90
		Time taken for empty return trip	hour	0.400	688.00	275.20
						734.10
		Cost for 36.0 t.km				20.39
		Rate per t.km = (a+b)/36.00			Say	20.39
		Case-II: Unsurfaced Gravel Road				
		Speed with load: 12 km/hour				
		Speed for empty return trip: 20 km/hour				
		a) Machinery				
		Tractor 3.6 t capacity				
		Time taken for onwads haulage with load	hour	0.833	688.00	573.10
		Time taken for empty return trip	hour	0.500	688.00	344.00
						917.10
		Cost for 36.0 t.km				25.48
		Rate per t.km = (a+b)/36.00			Say	25.48
		Case-III: Katcha Road				
		Speed with load: 10 km/hour				
		Speed for empty return trip: 15 km/hour				
		a) Machinery				
		Tractor 3.6 t capacity				
		Time taken for onwads haulage with load	hour	1.000	688.00	688.00
		Time taken for empty return trip	hour	0.667	688.00	458.90
						1,146.90
		Cost for 36.0 t.km				31.86
		Rate per t.km = (a+b)/36.00			Say	31.86
2	6.6.1.	Labour for laying dry graded jhama khoa or stone filter under Brick Pitching or Boulder pitching in slope or apron including light ramming etc. all complete job as per approved design, specification and direction of E/I				
	WRD	Unit = Per Cum				
		Taking output= 2.832 Cum				
		a) Labour				
		Mazdoor (Unskilled)	Nos	3.00	410.00	1,230.00
		Rate for 2.832 Cum				1,230.00
		Rate Per Cum				434.32

Sl No.	SOR No.	Description	Unit	Qty	Rate(Rs.)	Amount (Rs.)
3	1.1	Loading and Unloading of Stone Boulder, Stone aggregate ,Sand, Kankar,Moorum , Brick Bats				
	RCD	Unit = Per Cum				
		Taking output= 2.25 Cum				
		Time required for				
		i) Positioning of tipper at unloading point	day	1 Min		
		ii) Loading by front end loader 1 cum bucket capacity	day	2.71Min		
		Total		3.71Min		
		a) Labour				
		Mate	day	0.03	434.00	13.02
		Mazadoor for Loading and unloading	day	0.72	410.00	295.20
		b) Machinery				
		Tractor 3.6 t capacity	Hour	0.06	688.00	41.28
		Front end loader 1 cum bucket capacity	Hour	0.06	1,432.00	85.92
		Cost of 2.25 Cum = (a+b)=				435.42
		Rate per Cum=(a+b+c)/2.25				193.52
		Note:- Unloading will be done Manually.				
4		Supplying of Brick Bats				
		a) Labour				
		Cost of Labour for Pitching and Light Ramming	Cum	1.00	434.32	434.32
		b) Materials				
		Bricks Bats -Basic Rate Taken From RCD S.O.R. Schedule- M:11- dt.-30.01.2024 (For Year 2024-25).	Cum	1	994.00	994.00
		d) Carriage				
		Add:Carriage Charge for Brick bats	Cum	1	472.86	472.86
		Total = (a+b+c+d)=				1,901.18
		Total Cost Per Cum=				1,901.18

Sl No.	SOR No.	Description	Unit	Qty	Rate(Rs.)	Amount (Rs.)
		Providing and Laying Reinforced Cement Concrete Pipe NP3 as per design in Single Row				
		Providing and laying reinforced cement concrete pipe NP3 in single row including fixing collar but excluding excavation, protection works, backfilling, concrete and masonry.				
		Unit = m				
		Taking output = 7.5 m				
		(3 pipes of 2.5 m length each)				
		(B) 1000 mm dia				
		(a) Material				
		(i) RCC Pipe NP-3 Pipe	m	7.50	6,295.58	47,216.85
		(b) Labour				
		(i) Mate	day	0.09	434.00	39.06
		(i) Mason 1st Class	day	0.25	550.00	137.50
		(i) Mazadoor Unskilled	day	2.00	410.00	820.00

Cost for 7.5 m Length(a+b)=

48,213.41

Cost per meter Length(a+b)/7.5=

6,428.45

11.2	Local sand filling in trenches, transporting to site, spreading, grading and compacting to meet requirement of table 300.1 and 300.2 with a lead as per technical specification and direction of E.I.				
1	Sand filling				
	unit = cum				
a)	Labour				
	Mate	Day	0.01	410	4.1
	Mazdoor (Unskilled)	Day	0.3	410	123
b)	Local Sand (With carriage)	cum	1	331.86	331.86
	Rate per cum = a+b (Fine sand with carriage)				458.96

BASIC RATES
(A) Labour

Sl. No.	Description of Labour	Unit	Rate (Rs.)
L-01	Bhisti	day	410.00
L-02	Bitumen Sprayer	day	430.00
L-03	Blacksmith	day	550.00
L-04	Blaster	day	676.00
L-05	Carpenter 1st Class	day	550.00
L-06	Chips spreader	day	491.00
L-07	Chiseller	day	634.00
L-08	Dresser (Skilled)	day	519.00
L-09	Driller	day	426.00
L-10	Electrician	day	550.00
L-11	Fitter	day	491.00
L-12	Mason (1st class)	day	550.00
L-13	Mason (2nd Class)	day	491.00
L-14	Mate	day	434.00
L-15	Mazdoor (Unskilled)	day	410.00
L-16	Mazdoor (Semi skilled)	day	426.00
L-17	Mazdoor (Skilled)	day	519.00
L-18	Painter (1st class)	day	520.00
L-19	Plumber	day	550.00
L-20	Surveyor	day	496.00
L-21	White Washer	day	519.00

Schedule: M11

Date:- 30.01.2024

Approved Rate of Bricks & Bricks related materials by the State Level Schedule Rate Committee for the year 2024 - 2025
(for Preparation of Schedule of Rate only) - Materials should conform to relevant BIS/IRC/MORT & H Specifications.
Rates are inclusive of Royalty but Exclusive of all taxes, GST, Contractor's profit and Overhead Charges (Rates are at source)

Sr. No.	Materials	Unit	Approved Rates (Rs)	
			In figure (Rs)	In words
1	2	3	4	5
1	100 A Bricks			
	(i) For urban Patna	Nos/1000	6124.00	Rupees Six Thousand One Hundred Twenty Four and Paise Zero Only
	(ii) For Darbhanga, Bhagalpur, Munger & Muzaffarpur	Nos/1000	5170.00	Rupees Five Thousand One Hundred Seventy and Paise Zero Only
	(iii) For Gaya & Saran	Nos/1000	4891.00	Rupees Four Thousand Eight Hundred Ninety One and Paise Zero Only
	(iv) For Saharsa	Nos/1000	5310.00	Rupees Five Thousand Three Hundred Ten and Paise Zero Only
	(v) For Purnea	Nos/1000	5590.00	Rupees Five Thousand Five Hundred Ninety and Paise Zero Only
	(vi) For rural Patna	Nos/1000	5100.00	Rupees Five Thousand One Hundred and Paise Zero Only
2	100 B Bricks			
	(i) For urban Patna	Nos/1000	5684.00	Rupees Five Thousand Six Hundred Eighty Four and Paise Zero Only
	(ii) For Darbhanga, Bhagalpur, Munger & Muzaffarpur	Nos/1000	4749.00	Rupees Four Thousand Seven Hundred Forty Nine and Paise Zero Only
	(iii) For Gaya & Saran	Nos/1000	4472.00	Rupees Four Thousand Four Hundred Seventy Two and Paise Zero Only
	(iv) For Saharsa	Nos/1000	4891.00	Rupees Four Thousand Eight Hundred Ninety One and Paise Zero Only
	(v) For Purnea	Nos/1000	5170.00	Rupees Five Thousand One Hundred Seventy and Paise Zero Only
	(vi) For rural Patna	Nos/1000	4662.00	Rupees Four Thousand Six Hundred Sixty Two and Paise Zero Only
3	Brick Tiles (300mmx150mmx50mm)			
	(i) For urban Patna and rural Patna	Nos/1000	6124.00	Rupees Six Thousand One Hundred Twenty Four and Paise Zero Only
	(ii) For Saharsa, Bhagalpur, Darbhanga & Muzaffarpur	Nos/1000	6149.00	Rupees Six Thousand One Hundred Forty Nine and Paise Zero Only
	(iii) For Purnea	Nos/1000	6430.00	Rupees Six Thousand Four Hundred Thirty and Paise Zero Only
	(iv) For other places	Nos/1000	5869.00	Rupees Five Thousand Eight Hundred Sixty Nine and Paise Zero Only
4	Picket Jhama Bricks			
	(i) For urban Patna	Nos/1000	5248.00	Rupees Five Thousand Two Hundred Forty Eight and Paise Zero Only
	(ii) For Darbhanga, Bhagalpur, Munger & Muzaffarpur	Nos/1000	4332.00	Rupees Four Thousand Three Hundred Thirty Two and Paise Zero Only
	(iii) For Gaya & Saran	Nos/1000	4047.00	Rupees Four Thousand Forty Seven and Paise Zero Only
	(iv) For Purnea	Nos/1000	4749.00	Rupees Four Thousand Seven Hundred Forty Nine and Paise Zero Only
	(v) For Saharsa	Nos/1000	4472.00	Rupees Four Thousand Four Hundred Seventy Two and Paise Zero Only
	(vi) For rural Patna	Nos/1000	4234.00	Rupees Four Thousand Two Hundred Thirty Four and Paise Zero Only
5	Brick Bats			
	(i) For urban Patna	Per m ³	1084.00	Rupees One Thousand Eighty Four and Paise Zero Only
	(ii) For Purnea, Saharsa, Bhagalpur, Munger & Darbhanga	Per m ³	1041.00	Rupees One Thousand Forty One and Paise Zero Only
	(iii) For other places	Per m ³	994.00	Rupees Nine Hundred Ninety Four and Paise Zero Only
	(iv) For rural Patna	Per m ³	1040.00	Rupees One Thousand Forty and Paise Zero Only
6	Jhama Metals			
	(a) 63 mm to 40 mm size			
	(i) For urban Patna	Per m ³	1287.00	Rupees One Thousand Two Hundred Eighty Seven and Paise Zero Only
	(ii) For Purnea, Saharsa, Bhagalpur, Munger & Darbhanga	Per m ³	1232.00	Rupees One Thousand Two Hundred Thirty Two and Paise Zero Only
	(iii) For other places	Per m ³	1207.00	Rupees One Thousand Two Hundred Seven and Paise Zero Only
	(iv) For rural Patna	Per m ³	1257.00	Rupees One Thousand Two Hundred Fifty Seven and Paise Zero Only
	(b) 40 mm to 20 mm size			
	(i) For urban Patna	Per m ³	1432.00	Rupees One Thousand Four Hundred Thirty Two and Paise Zero Only
	(ii) For Purnea, Saharsa, Bhagalpur, Munger & Darbhanga	Per m ³	1372.00	Rupees One Thousand Three Hundred Seventy Two and Paise Zero Only
	(iii) For other places	Per m ³	1333.00	Rupees One Thousand Three Hundred Thirty Three and Paise Zero Only
	(iv) For rural Patna	Per m ³	1389.00	Rupees One Thousand Three Hundred Eighty Nine and Paise Zero Only
	(c) 20 mm and down			
	(i) For urban Patna	Per m ³	1638.00	Rupees One Thousand Six Hundred Thirty Eight and Paise Zero Only


BASIC RATES
(C) USAGE RATES OF PLANT & MACHINERY

Sr. No.	Description of		Output of Machine		Usage Rates in Rs.	
	Machine	Activity	Unit	Output	Unit	Rate
PM-011	Front end-loader 1 cum bucket capacity @ 45 cum/hour	Loading Aggregates	cum/h	45.00	per hour	1,432.00
		Loading Soil	cum/h	100.00		1,432.00
PM-018	Motor Grader	Scarifier & levelling	cum/h	200.00	per hour	2,697.00
	Tractor Mounted Grader			50.00		570.00
PM-019	Needle vibrator	Vibrating cement concrete mix	cum/h	3.50	per hour	76.35
PM-020	Paver finisher	Laying/spreading	t/h	75.00	per hour	1,390.00
PM-021	Plate compactor	Compaction	cum/h		per hour	467.00
PM-022	Plate vibrator	Compaction	cum/h		per hour	467.00
PM-023	Screed vibrator	Compaction	cum/h		per hour	102.64
PM-024	Smooth wheeled 80-100 kN tandem roller	Compaction of Sub-base/ Asphalt	cum/h	30.00	per hour	1,722.00
PM-025	Stone crusher (Integrated) of 200 TPH	Crushing of Spalls	t/h	200.00	per hour	27,425.00
PM-026	Three wheel 80-100 kN Static Roller	Compaction/ Rolling			per hour	781.00
		Earth:- Embankment or sub-grade	cum/h	80/70		781.00
		Sub-base G-I	cum/h	10.00		781.00
		Sub-base G-II/G-III	cum/h	8.00		781.00
		WMM	cum/h	16.00		781.00
PM-027	Tipper 5.5 cum/10 t	Carriage	cum/trip	5.50	per hour	1,043.00
PM-028	Tractor with Disc Harrows	Pulverisation of soil	cum/h	80.00	per hour	549.10
PM-029	Tractor with ripper @ 60 cum per hour	Ripping Pavements, uprooting trees	cum/h	60.00	per hour	591.40
PM-030	Tractor with trolley/with Grading equipment	Transportation of materials	t/trip	3 to 5	per hour	688.00
PM-031	Tractor with Rotavator	Scarifier	cum/h	25.00	per hour	570.00

Seigniorage Fee Calculation

Name of Road:- Chiraiya Semra Se Shikarganj								
Block:- Chiraiya			District:- Motihari					
Sr. no.	Description	Unit	Qty.	Rate	Amount in Rs.	Total Material Qty. Required (Cum)	Total Amount	Add 10% Seigniorage Fee
1	Bricks Bats -Basic Rate Taken From RCD S.O.R. Schedule- M:11 dt.-30.01.2024 (For Year 2024-25).	Cum	1	994.00	994.00	4400 3302.23	4373600	437360.00 328256.00
	Sand filling	Cum	1	145.87	145.87	458.96	66948.4952	6695.00
								444055.00 334951.00


 Junior Engineer
 RWD (W) Division, Shikaharna, Dhaka


 Assistant Engineer
 RWD (W) Division, Shikaharna, Dhaka


 Executive Engineer
 RWD (W) Division, Shikaharna, Dhaka



Id: 26.639068
Ude: 85.087944
lon: 77.88±5 m
acy: 6.0 m
07-28-2024 14:43
समरा शिकारगंज रोड सुंदर
दिर के पास पुल



Id: 26.639012
Ude: 85.087871
lon: 70.0±3 m
acy: 7.8 m
07-28-2024 14:43
समरा शिकारगंज रोड सुंदर
दिर के पास पुल

28-7-24
JH

28/7/24
MCH

Powered by NoteCam



id: 26.639129
itude: 85.087841
tion: 86.62±7 m
racy: 6.0 m
: 07-28-2024 14:42
: सेमरा शिकारगंज रोड सुंदर
मंदिर के पास पुल

Powered by NoteCam



itude: 26.639001
gitude: 85.087924
vation: 60.07±9 m
uracy: 7.1 m
e: 08-01-2024 16:33
e: सेमरा शिकारगंज रोड सुंदर
मंदिर के पास पुल

Powered by NoteCam


Handwritten signature/initials.

Handwritten signature/initials.



itude: 26.638687
gitude: 85.088048
ation: 62.34±8 m
uracy: 7.6 m
e: 08-01-2024 16:32
e: सेमरा शिकारगंज रोड सुंदर
मंदिर के पास पुल

Powered by NoteCam

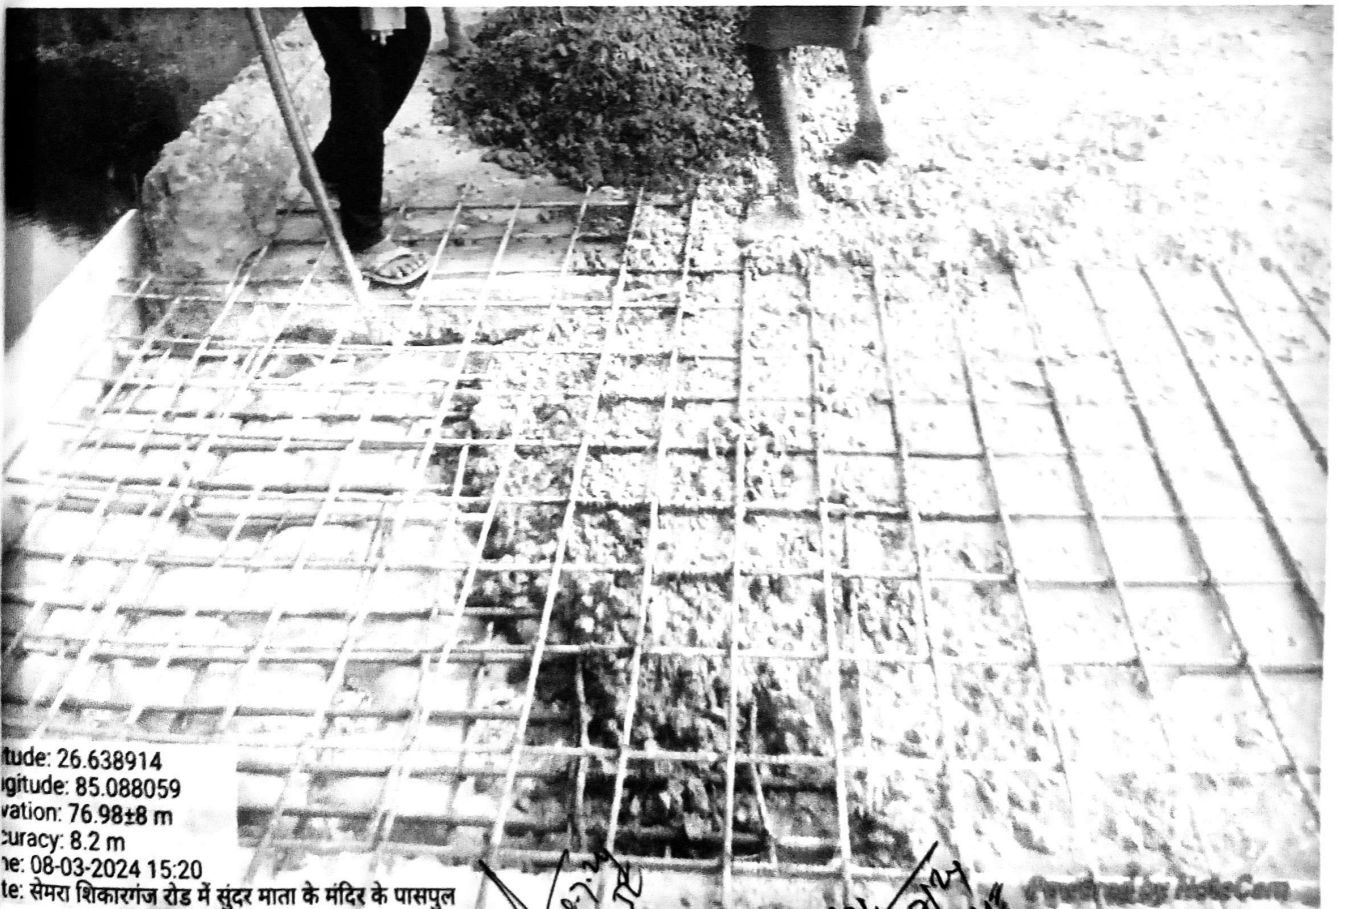

itude: 26.638914
gitude: 85.088059
ation: 76.98±8 m
uracy: 8.2 m
e: 08-03-2024 15:20
e: सेमरा शिकारगंज रोड में सुंदर माता के मंदिर के पास पुल

Powered by NoteCam



itude: 26.639323
gitude: 85.088005
ation: 54.77±7 m
uracy: 6.1 m
e: 08-04-2024 18:36
e: सेमरा शिकारगंज रोड में

Powered by NoteCam



itude: 26.639216
gitude: 85.08799
vation: 61.69±14 m
uracy: 9.2 m
ne: 08-04-2024 18:35
ite: सेमरा शिकारगंज रोड में

Powered by NoteCam



Altitude: 26.638876
Longitude: 85.087942
Elevation: 66.5±9 m
Accuracy: 6.2 m
Time: 08-04-2024 16:22
Location: सेमरा शिकारगंज रोड में

Powered by NoteCam



Altitude: 26.639387
Longitude: 85.087882
Elevation: 77.53±10 m
Accuracy: 7.2 m
Time: 08-04-2024 16:17
Location: सेमरा शिकारगंज रोड में

Powered by NoteCam

26

28/7/24

28-7-24
EE