


19

RURAL WORKS DEPARTMENT

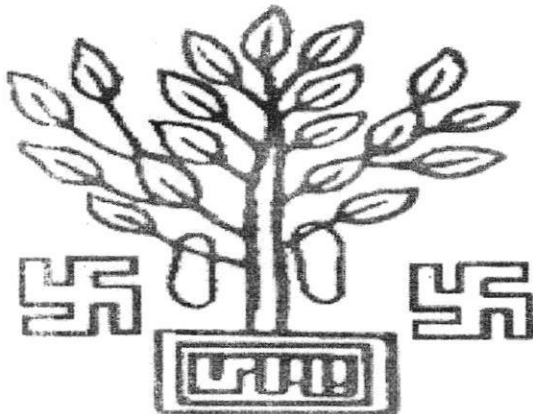

GOVERNMENT OF BIHAR

NAME OF ROAD:- BUS STAND TO PURAB MAHADALIT TOLA
SAH TOLA TAK

DIVISION:- R.W.D, WORKS DIVISION, TRIVENIGANJ

CIRCLE:- R.W.D, WORK CIRCLE, MADHEPURA

BLOCK:- CHHATAPUR

ESTIMATED COST - 2783800.00

पथ का नाम :-
कार्य का नाम :-

प्रतिवेदन
बल्लू से पूरे महापत्ता 2100. Sak tole. Kar,
Restoration works -
में बाढ़ से क्षतिग्रस्त भाग में यातायात चालू करने का कार्य।

संलग्न प्राक्कलन 10.06.2020 को प्रखण्ड में आयी भीषण बाढ़ से क्षतिग्रस्त में बाढ़ क्षतिग्रस्त मरम्मत मद से यातायात चालू करने हेतु तैयार किया गया है जिसकी प्राक्कलित लागत 2783800/- है।
उक्त पथ का निर्माण योजना निर्गत हुआ है एवं योजना अनुरक्षण अवधि में पथ के कटे (क्षतिग्रस्त) भाग में आवश्यकता अनुसार Hume Pipe, Bamboo, लोकल बालू एवं Brick Bats देने के बाद यातायात चालू कराया गया है। पथ के विभिन्न हिस्से में कराये गये कार्य का विवरणी स्पष्ट रूप से प्राक्कलन में दर्शाया गया है।
प्राक्कलन मदों का दर वर्तमान अनुसूचित दर के अनुरूप है।

1/20/11/20
कनीय अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रशाखा,

1/20/11/20
सहायक अभियंता,
ग्रामीण कार्य विभाग,
कार्य अवर प्रमण्डल,

1/20/11/20
कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमण्डल,

Inspection Report for Flood Damage Work

Date:.....

1.Name of PIUs:- EE RWD DIV - Tirunelveli

2.Name of Block:- Chetapur 94006

3.Name of Road:- Bus Stand se, Mahadul. tal.

A. For Road L- 2.70 km

1.Damage Location/Chainage:-

2.Damage Length :- 0.109 km

3.Nature of Damage :- w/cut of road & 2 feet

4.Details of Restoration Works:- L/Su-2, B/Su, HP.

(i.)Material being used in Restoration Works:- 4 Su-2 B/Su, HP.

(ii.)Equipments/Tools being used in Restoration works:-

(iii.)Procedure taken up in Restoration works:- Job, Tractor Tolly /

(iv.)Restored Length :- 0.109 km

B. For Bridge

1. Damage Location/Chainage:-

2.Damage Length :-

3.Nature of Damage :-

4.Details of Restoration Works:-

(i.)Material being used in Restoration Works:-

(ii.)Equipments/Tools being used in Restoration works:-

(iii.)Procedure taken up in Restoration works:-

(iv.)Restored Length :

Signature of JE/AE/EE

Signature

(Name of Inspector)

Abstract of Cost
BUS STAND TO PURAB MAHADALIT TOLA SAH TOLA TAK

Division:- RWD triveniganj

BLOCK :- CHHATAPUR

Sub division:-Chhatapur

Yr. 2020-21

Sl. No./ item no.	Item of works	Unit	Quantity	Rate	Amount
1/5.7.7 (WRD)	Supply of Local Sand obtained from river bed , watering and ramming, all comp. job as perspe. & dirc.of E/I TotalLength of pile driven	Per CUM	1622.6 cum	522.67	848073.89
3/5.7.8 (WRD)	Supply and carriage of brikk bats up to 8 km from breach and placing in breach and laying of bats all complete job. as perspecification and direction of E/I	per CUM	837.0cum	1751.13	1465695.81
4/5.7.40.1 (WRD)	Supply ,laying and carriage of HUME PIPE 1000 mm dia all complete job. as perspecification and direction of E/I	Per M	15.0m	3377.00	50655.00

2364425.nos

Add 12% GST on item no 5,6&7

283731.00

Add 1% Labour cess total item

23644.00

2671800.00

S.fee

111989

Total

Rs

2783789.00

Say Rs 2783800 /=

Junior Engineer
Chhatapur

S D O
Rural Works Sub division
Chhatapur

Executive Engineer
Rural Works division
Triveniganj

Technically approved for
Rs 27,83,800/- (Rupees twenty seven
lak eighty three thousand & eight hundred
only)

अधीक्षक अभियंता
ग्रामीण कार्य विभाग
कार्य अंचल, मधेपुरा

Detailed Estimate

Name of Road:

BUS STAND TO PURAB MAHADALIT TOLA SAH TOLA TAK

Sl No.	Items of Works	Nos.	L (m)	B (m)	D IN (Av.) (m)	Quantity (m3)
1	Filling of local sand obtained from river bed, watering & ramming, all complete job as per specification & direction of Engineer-in-charge.					
		1	48.50	$(4.5+8.50)/2$	$(1.5+2.75+1.55)/3$	609.48
		1	30.00	$(4.5+8.50)/2$	$(1.8+2.8+2.9)/3$	487.50
		1	30.00	$(5.5+8.90)/2$	$(2.9+2.7+1.70)/3$	525.60
					TOTAL=	1622.58
					Total Qty =	1622.58
2	Supply and Carriage of brick bats upto 8 km breach and placing in breaches and lying of bats, all complete job.					
		1	6.00	9.00	1.50	81.00
		1	48.00	$(6.5+4.50)/2$	1.50	396.00
		1	10.00	9.00	1.00	90.00
		2	30.00	4.50	1.00	270.00
					Total Qty. =	837.00
3	Supply, laying and Carriage of of hume pipe 1000 mm dia (HPC), all complete job.					
		1	2.00	2.50		5.00
		2	2.00	2.50		10.00
					Total Qty. =	15.00

[Signature]
20/10/20

JE

RWD SUB DIV- CHHATAPUR

[Signature]
20/10/20

AE

RWD SUB DIV. CHHATAPUR

[Signature]
20/11

EE

RWD WORKS DIV. TRIVENIGANJ