

**OFFICE OF THE EXECUTIVE ENGINEER
RURAL WORKS DEPARTMENT, WORKS DIVISION,
SIMRI BAKHTIYARPUR**

**WORK ALLOTTED BY ENGINEER IN CHIEF, R.W.D., BIHAR, PATNA
VIDE LETTER No :-2467 Enc, DATE :- 15.09.2025**

(Head : MMGSY (AWSESH-NDB) 2024-25

**Package No- MMGSY AWASESH-NDB-BRRP2-864-Simri Bakhtiyarpur
Agreement Value :-**

Sl. No	Name of Road	Length (in Km)	Const.Cost (inLakh)	Maint. Cost (inLakh)	Total Amount (inLakh)
01	Paharpur to Khotahi	2.080	31096589.00	1046363.00	32142952.00
02	Sakhua Durga Mandir se Murho Sima Tak	0.950	10759412.00	362622.00	11122034.00
Total :-		3.030	41856001.00	1408985.00	43264986.00

Name of Agency:-

**Rajesh Ranjay Construction (Prop-Ranjay Raj), Add-S/o
Amresh Yadav, At-Bhagwanpur, Ward No-02, Post-
Samda, Ps-Sour Bazar, Dist-Saharsa (Bihar) Pin code-
852202**

Registration No.- 1210425 ut to date 04.08.2026

Tender Id :- 142942, Bid Id :- 624563

Agreement No.....13.....CMBD of 2025-26

Agreement Rate : 1.76 % Below on BOQ rates with all taxes

Date of Commencement : 16.09.2025

Time for Completion : 15.09.2026 (12 Months)

M/S Rajesh Ranjay Construction

Ranjay Raj

Proprietor

Sig. of Contractor

06.10.25

**Executive Engineer
R.W.D. (W) Division,
Simri Bakhtiyarpur.**

06/10/25



बिहार BIHAR

ता. 28-10-2025 माँ मेसर्स राजेश रंजय कंस्ट्रक्शन भगवानपुर सौर बाजार
सहरसा के माँ 9000 का रुक बन्द से दिया

9100x9 = 9000 AZ 330004

Date of commencement: 16.09.2025
Date of completion: 25.09.2025

Rate :- 1.76% (Below on BOQ rates with all taxes)

AGREEMENT FROM

Agreement No : 13 CMBD/MMGSY (AWSESH-NDB)/2025-26

This Agreement made the06th.....day of October-2025 (Time 11:20 AM)

Between The Executive Engineer Rural Works Department Works Division, Simri Bakhtiyarpur ("The E/T")
of the one part, and Rajesh Ranjay Construction (Prop-Ranjay Raj),

[Name & address of Contractor] Add-S/o Amresh Yadav, At-Bhagwanpur, Ward No-02, Post-Samda, Ps-Sour Bazar,
Dist-Saharsa (Bihar) Pin code-852202 ("The Contractor") of the other part.

Whereas the E/I is desirous that the Contractor execute Initial Rectification, Minor improvement, Surface renewal, Construction of bridge/drainage protection and performance based Rural Road contract for the Operation & Management Services of Roads/ Construction of Road Package No-MMGSY AWASESH-NDB-BRRP2-864-Simri Bakhtiyarpur (2 Nos Road Under Patarghat Block) (hereinafter called "the works & Services") and the E/I has accepted the Bid by the Contractor for the execution of such The works & Services and the remedying of any defects therein, at a contract price of Rs 4,32,64,986.00 (Four crore thirty two lakh sixty four thousand nine hundred eighty six) only.

Agreement Value

Sl. No.	Packag e No	Name of road	Length	Const. Cost (in Lakh)	Maint. Cost (in Lakh)	Total (in Lakh)
1	MMGSY AWASESH NDB-BRRP2-864-Simri	Paharpur to Khotahi	2.080	31096589.00	1046363.00	32142952.00
2		Sakhuu Durga Mandir se Murho Sima Tak	0.950	10759412.00	362622.00	11122034.00
		Total	3.030	41856001.00	1408985.00	43264986.00
Total (in Words)		Four crore thirty two lakh sixty four thousand nine hundred eighty six only.				

Rajesh Ranjay Construction

Ranjay Raj
Proprietor

8/10/25

Executive Engineer
R.W.D. Works Division
Simri Bakhtiyarpur

NOW THIS AGREEMENT WITNESSETH and the parties here to agree as follows :-

1. In this Agreement, works and expressions shall have the meanings as are respectively assigned to them in the General condition here in after to, and they shall be deemed to form and be read and construed as part of this Agreement.

2. In consideration of the payment to be made by the employer to the contractor as here in after mentioned, the contractor hereby covenants with the Employer to execute and complete the works and remedy any defects therein in conformity in all aspects with the provisions of the contract.

3. The Employer hereby covenants to pay the contractor in consideration of the execution and completion of the works and remedying the defect wherein the contract price of such as may became payable under the provisions of the contract at the times and in the manner prescribed by the contract.

4. The following documents shall be deemed to form and be read & construed as part of this Agreement, viz:

i) Letter of Acceptance

ii) Contractor's Bid

iii) Section- VI- General Condition

iv) Section-VII- Particular Conditions

v) Section -V- Technical Specification(General and Supplementary Technical Specifications)

vi) Appendix A- Drawings

vii) Section-IV- works Schedule

viii) Quality plan for output and performance based road contract as per Clause A14.1 of the Technical Specification

ix) Appendices to the Contract

x) Addenda issued during bid period

xi) Any other relevant documents listed in the Particular Conditions together with any post bid correspondence.

In witness where of the parties there to have caused this Agreement to be executed the day and year first before written.

The common seal of

Was here unto affixed in the presence of:

Signed, Seal and delivered by the said

In the presence of:

Binding Signature of E/I **M/S Rajesh Ranjay Construction**

Binding Signature of Contractor **Ranjay Raj**
Proprietor



M/S Rajesh Ranjay Construction
Ranjay Raj
Proprietor

Signature
06.10.25

Signature
06/10/25
Executive Engineer
Rural Works Department
Work Division, Simri Bakhtiyarpur

OFFICE OF THE EXECUTIVE ENGINEER
R.W.D. WORKS DIVISION, SIMRI BAKHTIYARPUR
Mail Id-ee.simribakhtiyarpur@gmail.com (Mob-8986915464)

Agreement Details		
Name of work:-	Construction of Road From (1) Paharpur to Khotahi (Length-2.080) (2) Sakhua Durga Mandir se Murho Sima Tak (Length-0.950) Package No-MMGSY AWASESH-NDB-BRRP2-864-Simri Bakhtiyarpur	
Name of Contractor:-	Rajesh Ranjay Construction (Prop-Ranjay Raj), Add-S/o Amresh Yadav, At-Bhagwanpur, Ward No-02, Post-Samda, Ps-Sour Bazar, Dist-Saharsa (Bihar) Pin code-852202	
Mobile Number	9431827972	
E-mail-	rrcsaharsa@gmail.com	
Tendrer ID:-	142942	
BID ID :-	624563	
B.O.Q. Amount	44040092.00	
Agreement Value:-	43264986.00	
EMD Details	Required	Deposit
2% PSD:-	865300.00	865500.00
0.50% Additional Performance Security for 1.76% Below rate	220200.00	220500.00
Total:-	1085500.00	1086000.00
EMD (-)	0.00	0.00
Balance :-	1085500.00	1086000.00
(In Words) :-	Ten lakh eighty five thousand five hundred only.	
Bid Date:-	23.07.2025	
Date of LOA:-	16.09.2025	
Date of Completion:-	15.09.2026	
Defect lability period:-	15.09.2031+28 Days	

MS Rajesh Ranjay Construction
Ranjay Raj
Proprietor

88
06.10.25

Executive Engineer
Rural Works Department
Works Division, Simri Bakhtiyarpur

06/10/25

Agreement Details

Agreement No :-	13.....CMBD/MMGSY (AWSESH-NDB/2025-26)					
Name of Work :-	Construction of Road From (1) Paharpur to Khotahi (Length-2.080) (2) Sakhua Durga Mandir se Murho Sima Tak (Length-0.950) Package No-MMGSY AWASESH-NDB-BRRP2-864-Simri Bakhtiyarpur					
Length of Road (in Km)	2.080+0.950=3.030 KM					
T.S Amount (in Lakh)	334.612+116.092=450.704 Lakh., Dated 07.08.2024					
A.A. Letter No. & Date	355.530+154.050=509.580 Lakh, Letter No 747, Dated 15.03.2024					
Name of Agency :-	Rajesh Ranjay Construction (Prop-Ranjay Raj), Add-S/o Amresh Yadav, At-Bhagwanpur, Ward No-02, Post-Samda, Ps-Sour Bazar, Dist-Saharsa (Bihar) Pin code-852202					
Head :-	MMGSY (AWSESH-NDB) 2025-26					
Tender ID :-	142942					
BID ID :-	624563					
Estimated Cost :-						
Sl. No.	Package No	Name of Road	Length	Const.Cost (inLakh)	Maint. Cost (inLakh)	Total (in Lakh)
1	MMGSY AWASESH-NDB-BRRP2-864-Simri Bakhtiyarpur	Paharpur to Khotahi	2.080	31653694.00	1065109.00	32718803.00
2		Sakhua Durga Mandir se Murho Sima Tak	0.950	10952170.00	369119.00	11321289.00
Total			3.030	42605864.00	1434228.00	44040092.00
Total (in Words)		Four crore forty lakh forty thousand & ninty two only.				

Agreement Value :-

Agreement Value :						
Sl. No.	Package No	Name of road	Length	Const.Cost (inLakh)	Maint. Cost (inLakh)	Total (in Lakh)
1	MMGSY AWASESH-NDB-BRRP2-864-Simri Bakhtiyarpur	Paharpur to Khotahi	2.080	31096589.00	1046363.00	32142952.00
2		Sakhua Durga Mandir se Murho Sima Tak	0.950	10759412.00	362622.00	11122034.00
		Total	3.030	41856001.00	1408985.00	43264986.00
Total (in Words)		Four crore thirty two lakh sixty four thousand nine hundred eightysix only.				

As per Engineer in Cheif, R.W.D, Bihar, Patna, Letter No-2467 Enc ,Dated-15.09.2025, SI No-01

As per CE-4, R.W.D, Bihar, Purnia, Letter No., Enc, Dated-

As per SE, R.W.D, Works Circle, Saharsa, Letter No-....., Dated-.....

Rate	(-) 1.76% Below	One decimal Seventy six (Below on BOQ Rate)
Registration No	1210425 ut to date 04.08.2026	
Mobile No	9431827972	
E-mail Id	rrcsaharsa@gmail.com	
GST No	10FDXPR5664C1Z7	
PAN No	FDXPR5664C	
EPF	BRBHA2439282000	
News Pepar	Dinik Jagran (PR No-.....(RWD)2025-26	
Date of Start	16.09.2025 (12 Twelve Months)	
Date of Completion	Twelve months 15.09.2026) For Construction work 15.09.2031 with 5 years maintenance period	

Certified that this C.M.B.D. agreement contain Hand written..... pages only.

MS Rajesh Ranjay Construction
Ranjay Raj
Proprietor

Executive Engineer
Rural Works Department
Works Division, Simri Bakhtiyarpur
06/10/25

OFFICE OF THE EXECUTIVE ENGINEER
R.W.D. WORKS DIVISION, SIMRI BAKHTIYARPUR
Email. ID :- ee.simribakhtiyarpur@gmail.com (Mob-8986915464)

Details of Earnest Money

Sl No.	F.D./T.D./N.S.C./B.G./ No-	Nos	B.G. Issued Date	B.G. Maturity Date	Amount
1	3588IGP003045125	01	30.09.25	18.09.32	865500.00
2	3588IGP003020025	01	25.09.25	18.09.26	220500.00
Total					1086000.00

MS Rajesh Ranjay Construction
Ranjay Raj
Proprietor

[Signature]
6/10/25
Executive Engineer
Rural Works Department
Works Division, Simri Bakhtiyarpur
[Signature]
06/10/25

बिहार सरकार
ग्रामीण कार्य विभाग

पत्रांक- BRRDA (HQ) MMGSY (N)-270/13 Part-IV 920

/पटना, दिनांक-2.9.19

प्रेषक,

संजय दूबे, भा.प.से.
अपर सचिव,
ग्रामीण कार्य विभाग, पटना।

सेवा में,

अभियंता प्रमुख,
सभी मुख्य अभियंता,
सभी अधीक्षण अभियंता,
सभी नोडल पदाधिकारी,
सभी कार्यपालक अभियंता,
ग्रामीण कार्य विभाग।

विषय:-SBD (Standard Bidding Document) को Contract Clause-25 को विभागीय SBD/NIT Agreements में प्रतिस्थापित करने के संबंध में।

महाशय,

निदेशानुसार उपर्युक्त विषय के संबंध में कहना है कि पथ निर्माण विभाग की अधिसूचना संख्या-7435 (S) दिनांक 14.08.2019 SBD (Standard Bidding Document) के द्वारा Contract Clause-25 को निम्नलिखित रूप से प्रतिस्थापित किया गया है -

"Contract Clause-25 Settlement of Disputes and Arbitration- The Settlement of Disputes and Arbitration Shall be done in accordance with the Provisions Made in Bihar Public Works Contracts Disputes Arbitration Tribunal Act, 2008."

उक्त के क्रम में यह निदेश दिया जाता है कि -

- (1) ग्रामीण कार्य विभाग अंतर्गत PMGSY को छोड़कर भविष्य की सभी निर्माण योजनाओं में Standard Bidding Document, NIT तथा एकरारनामा आदि दस्तावेजों में उक्त आशय का संशोधन तुरत अनिवार्यतः किया जाए।
- (2) पूर्व के सभी Standard Bidding Document के आलोक में चल रहे कार्यों में संवेदक की लिखित सहमति प्राप्त कर वर्तमान एकरारनामा में उक्त आशय का संशोधन किया जाए।

विश्वासभाजन

30/8/19.
सरकार के अपर सचिव

M/S Rajesh Ranjay Construction
Ranjay Raj
Proprietor

Executive Engineer
R.W.D. Works Division
Simabatiyapur

**Office of The Executive Engineer
R.W.D., Works Division, Simri Bakhtiyarpur**

AGREEMENT NO :-,

Financial Year.....

सरकार के अपर सचिव का पत्रांक-BRRDA(HQ)MMGSY(N)-270/13 Part-IV -920 /

पटना, दिनांक-02.09.2019

पथ निर्माण विभाग की अधिसूचना संख्या-7435 (S) दिनांक-14.08.2019 SBD (Standard Bidding Document) के द्वारा Contract Clause-25 को निम्नलिखित रूप से प्रतिस्थापित किया गया है :-


“ Contract Clause-25 Settlement of Disputes and Arbitration- The Settlement of Dispute and Arbitration Shall be done in accordance with the Provisions Made in Bihar Public Works Contracts Disputes Arbitration Tribunal Act, 2008”

मैं उपर्युक्त शर्त से सहमत
होकर हस्ताक्षर किया हूँ।

M/S Rajesh Ranjay Construction

Ranjay Ray

Proprietor
Contractor


Executive Engineer
Rural Works Division
Simri Bakhtiyarpur

06/10/19

कार्यपालक अभियंता का कार्यालय
ग्रामीण कार्य विभाग, कार्य प्रमंडल, सिमरी बख्तियारपुर।

Email ID :- ee.simribakhtiyarpur@gmail.com (Mob-8986915464)

पत्रांक... 2271/2025/
 प्रेषक,

सिमरी बख्तियारपुर, दिनांक- 03.10.25

कार्यपालक अभियंता,
 ग्रामीण कार्य विभाग,
 कार्य प्रमंडल सिमरी बख्तियारपुर।

सेवा में,

शाखा प्रबंधक,
 State Bank of India,
 Bailey Road Patna. Branch Code-6379

विषय :- B.G के सत्यापन के संबंध में।

प्रसंग :- विभागीय पत्रांक-1917, दिनांक-23.05.2025, पत्रांक- 2467, दिनांक-15.09.2025, एवं इस कार्यालय के पत्रांक-2140, दिनांक-16.09.2025

महाराज,

उपर्युक्त विषयक प्रासंगिक पत्र के संदर्भ में कहना है कि शीर्ष MMGSY-AWSESH-NDB के पैकेज संख्या-MMGSY AWASESH-NDB-BRRP2-864-Simri Bakhtiyarpur के 02 पथों (प्रखंड-पतरघट) के निविदा संख्या-142942, बीड आई०डी०-624563 का कार्य विभागीय पत्रांक-2467, दिनांक-15.09.2025 के क्रम संख्या-01 से संवेदक Rajesh Ranjay Construction (Prop-Ranjay Raj), Add-S/o Amresh Yadav, At-Bhagwanpur, Ward No-02, Post-Samda, Ps-Sour Bazar, Dist-Saharsa (Bihar) Pin code-852202 को परिमाण विपत्र की दर पर मो० 4,32,65,425.00 रुपये मात्र का कार्यदेश निर्गत होने के अनुपालन में इस कार्यालय के पत्रांक-2140, दिनांक-16.09.2025 द्वारा LOA निर्गत करते हुये एकरारनामा हेतु वांछित कागजात के साथ-साथ PSD की राशि 8,65,500.00 एवं APG की राशि 2,20,500.00 रुपये मात्र का B.G जमा करने हेतु निर्देश दी गई थी, तत्पश्चात् संवेदक द्वारा वांछित कागजात के साथ-साथ B.G जमा की गई।

अतः अनुरोध है कि उक्त पैकेज के B.G का सत्यापन के पश्चात् सत्यापन की प्रति अधोहस्ताक्षरी के Email ID :- ee.simribakhtiyarpur@gmail.com के माध्यम से उपलब्ध कराने की कृपा की जाय ताकि अग्रेतर कार्रवाई की जा सकें। जिराकी विवरणी निम्न हैं -

जाय ताकि अग्रतर कारवाई का जा सक। जिसका विवरण निम्न है

Sl. No.	scheme	Package No	B.G No	Date of Issue	Validity	Amount
01	MMGSY AWASESH- NDB	MMGSY AWASESH-NDB- BRRP2-864-Simri Bakhtiyarpur	3588IGP003045125	30.09.25	18.09.32	8,65,500.00
02			3588IGP003020025	25.09.25	18.09.26	2,20,500.00
Total :-						10,86,000.00

विश्वासभाजन

अन० :- यथोक्त

विश्वासभाजन

8/9
03.10.25

कार्यपालक अभियंता
 ग्रामीण कार्य विभाग
 कार्य प्रमंडल, सिमरी बख्तियारपुर।

ज्ञापक... 2271/2025/ सिमरी बख्तियारपुर, दिनांक... 03.10.25/
 प्रतिलिपि :- श्री चंदन कुमार, नोडल प्रशाखा पदाधिकारी-13 (बजट)/नोडल पदाधिकारी, ग्रामीण कार्य विभाग, बिहार, पटना को अनुलग्नक की प्रति के साथ विभागीय पत्रांक-1917, दिनांक-23.05.2025 के अनुपालन में सत्यापन हेतु सूचनार्थ प्रेषित।

अन० :- यथोक्त



कार्यपालक अभियंता
 ग्रामीण कार्य विभाग
 कार्य प्रमंडल, सिमरी बख्तियारपुर।

M/S Rajesh Ranjay Construction
 Ranjay Raj
 Proprietor

8/9
03.10.25

8/9
03.10.25

Executive Engineer
 R.W.D. Works Division
 Simri Bakhtiyarpur

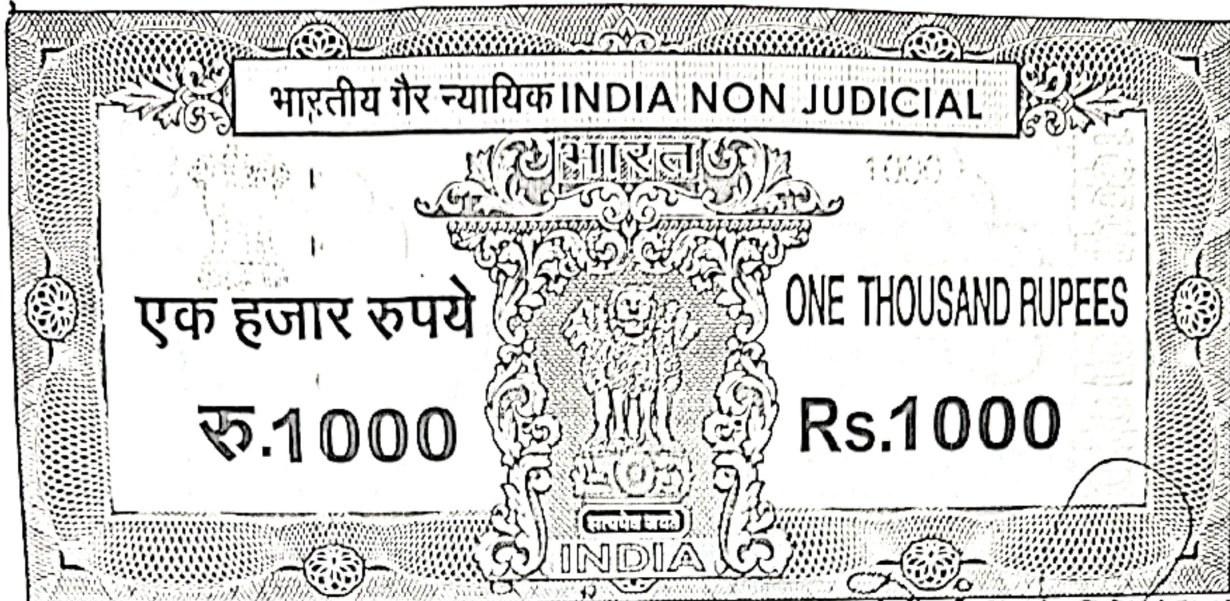

871 गंगा 29 म का लक्ष्मण सिंह गंग 25/09/2025
 13/9/25 2012 गंगा 242251 22 220528
 1000X1=1000
 1000
 प्रमोद नारायण सिंह
 मूद्रांक विक्रेता
 जिला निवेदन परिसर, सहसा
 संपुर्ण सं-258/25


this Stamp Paper is an integral
 part and parcel of BG-3588INP003020025
 Dated: 25/09/2025 for
 Rupees Rs 2,20,500/-

M/S Rajesh Ranjay Construction
 Rajay Raj
 Proprietor



वास्तविक बैंक ऑफ बड़ोदा
 FOR BANK OF BARODA
 Chief Manager K-2339
 सहसा शाखा/Saharsa Branch
 KY. Gauva.

Executive Engineer
 R.W.D. Works Division
 Simarbakhtiyapur



PHYSICAL ISSUANCE OF BANK GUARANTEE

PERFORMANCE BANK GUARANTEE (UNCONDITIONAL)

BG NO : 3588IGP003020025
DATE OF BANK GUARANTEE : 25/09/2025
VALIDITY OF BANK GUARANTEE : 18.09.2026
CLAIM PERIOD OF BANK GUARANTEE: 18.09.2026
AMOUNT OF BANK GUARANTEE : RS.2,20,500.00(RUPEES TWO LAKH TWENTY THOUSAND FIVE HUNDRED ONLY)

TO,
THE EXECUTIVE ENGINEER
R.W.D, WORKS DIVISION,
SIMRI BAKHTIYARPUR
SIMRI BAKHTIYARPUR
SAHARSA

WHEREAS RAJESH RANJAY CONSTRUCTION (PROP-RANJAY RAJ), ADD-S/O AMRESH YADAV, AT-BHAGWANPUR, WARD NO-02, POST-SAMDA, PS-SOUR BAZAR, DIST-SAHARSA (BIHAR) PIN CODE-852202. (NAME AND ADDRESS OF CONTRACTOR) (HEREAFTER CALLED THE CONTRACTOR) HAS UNDERTAKEN IN PURSUANCE OF CONTRACT NO 2467, DATED 15.09.2025 AND 2140, DATED 16.09.2025 TO EXECUTE UNDER HEAD MMGSY-NDB, (1) PAIARPUR TO KHOTAH (LENGTH-2.500) (2) SAKHUA DURGA MANDIR SE MURHO SIMA TAK (LENGTH-0.950) (PACKAGE NO-MMGSY AWASESH-NDB-BRRP2-864-SIMRI BAKHTIYARPUR) IN DISTRICT SAHARSA (BIHAR), TENDER ID 142942, BID ID 624563 (NAME OF CONTRACT AND BRIEF DESCRIPTION OF WORKS) (HEREINAFTER CALLED THE CONTRACT)

AND WHEREAS IT HAS BEEN STIPULATED BY YSL NO.PARTICULARSDETAILS
1NAME OF THE BENEFICIARYEXEOU IN THE SAID CONTRACT THAT THE CONTRACTOR SHALL FURNISHED YOU WITH A BANK GUARANTEE BY A RECOGNIZED BANK FOR THE SUM SPECIFIED THEREIN AS SECURITY FOR COMPLIANCE WITH HIS OBLIGATION IN ACCORDANCE WITH THE CONTRACT.
AND WHEREAS WE HAVE AGREED TO GIVE THE CONTRACTOR SUCH A BANK GUARANTEE:

NOW THEREFORE WE BANK OF BARODA (NAME OF BANK) OF INDIA (NAME OF COUNTRY) HAVING OUR REGISTERED OFFICE AT SAHARS (HEREINAFTER CALLED THE BANK) HEREBY AFFIRM THAT WE ARE THE GUARANTOR AND RESPONSIBLE TO YOU ON BEHALF OF THE CONTRACTOR, UP TO TOTAL OF RS.2,20,500.00(RUPEES TWO LAKH TWENTY THOUSAND FIVE HUNDRED ONLY) SUCH SUM BEING PAYABLE IN THE CURRENCIES AND PROPORTIONS OF CURRENCIES IN WHICH THE CONTRACT PRICE IS PAYABLE, AND WE

MS Rajesh Ranjay Construction
Ranjay Raj
Proprietor



Executive Engineer
R.W.D. Works Division
Simrabakhtiyapur

वास्तविक बैंक ऑफ बड़ौदा
FOR BANK OF BARODA

Chief Manager
K-2339
K.T. Givrayav

UNDERTAKE TO PAY YOU , UPON YOUR FIRST WRITTEN DEMAND AND WITHOUT CAVIL OR ARGUMENT , ANY SUM OR SUMS WITHIN THE LIMIT OF RS.2,20,500.00(RUPEES TWO LAKH TWENTY THOUSAND FIVE HUNDRED ONLY) AS AFORESAID WITHOUT YOUR NEEDING TO PROVE OR TO SHOW GROUNDS OR REASONS FOR YOUR DEMAND FOR THE SUM SPECIFIED THEREIN.

WE HEREBY WAIVE THE NECESSITY OF YOUR DEMANDING THE SAID DEBT FROM THE CONTRACTOR BEFORE PRESENTING US WITH THE DEMAND.

WE FURTHER AGREE THAT NO CHANGE OR ADDITION TO OR OTHER MODIFICATION OF THE TERMS OF THE CONTRACT OR OF THE WORKS TO BE PERFORMED THERE UNDER OR OF ANY OF THE CONTRACT DOCUMENTS WHICH MAY BE MADE BETWEEN YOU AND THE CONTRACTOR SHALL IN ANY WAY RELEASE US FROM ANY LIABILITY UNDER THIS GUARANTEE AND WE HEREBY WAIVE NOTICE OF ANY SUCH CHANGE ,ADDITION OR MODIFICATION.

THIS GUARANTEE SHALL BE VALID UNTIL 18.09.2026 FROM THE DATE OF EXPIRY OF THE DEFECT LIABILITY PERIOD.

THE GUARANTOR BANK HEREBY CONFIRMS THAT IT IS ON THE SFMS(STRUCTURAL FINANCE MESSAGING SYSTEM) PLATFORM AND SHALL INVARIABLY SEND AN ADVICE OF THIS BANK GUARANTEE TO THE DESIGNED BANK SBI HAVING FOLLOWING DETAILS:

SL NO.PARTICULARSDETAILS

1NAME OF THE BENEFICIARYEXECUTIVE ENGINEER, RWD, WORKS DIVISION,SIMRI BAKHTIYARPUR

2NAME OF THE BANK:STATE BANK OF INDIA VISHESHVESARAIYA BHAWAN CAMPUS , BAILEY ROAD , PATNA - 800015

3IFSC CODE SBIN0006379

4EMAIL ID:EE.SIMRIBAKHTIYARPUR@GMAIL.COM

NOTWITHSTANDING ANYTHING CONTAINED HEREIN:

1.OUR LIABILITY UNDER THIS BANK GUARANTEE SHALL NOT EXCEED RS.2,20,500.00(RUPEES TWO LAKH TWENTY THOUSAND FIVE HUNDRED ONLY)

2.THIS GUARANTEE SHALL BE VALID UP TO 18.09.2026 AND

3.WE ARE LIABLE TO PAY THE GUARANTEED AMOUNT OR ANY PART THEREOF UNDER THIS BANK GUARANTEE ONLY AND ONLY IF YOU SERVED UPON US A WRITTEN CLAIM OR DEMAND ON OR BEFORE 18.09.2026

4.THIS BANK GUARANTEE IS NEITHER TRANSFERABLE NOR ASSIGNABLE TO THIRD PARTY.

THIS GUARANTEE WILL BE OPERATIVE WHEN ACCOMPANIED WITH ADVICE (SFMS) ISSUED FROM THE ADVISING BANK.

DATE:25/09/2025

BANK OF BARODA



FOR BANK OF BARODA

STATE BANK OF INDIA VISHESHVESARAIYA BHAWAN, VIP RD, PATNA - 800015
NUMBER: , TAX NUMBER: , EMAIL: SAHARS@BANKOFINDIA.CO
SWIFT: BARB KZ 04 561



M/S Rajesh Ranjay Construction
Ranjay Raj
Proprietor

Executive Engineer
R.W.D. Works Division
Simri Bakhtiyapur

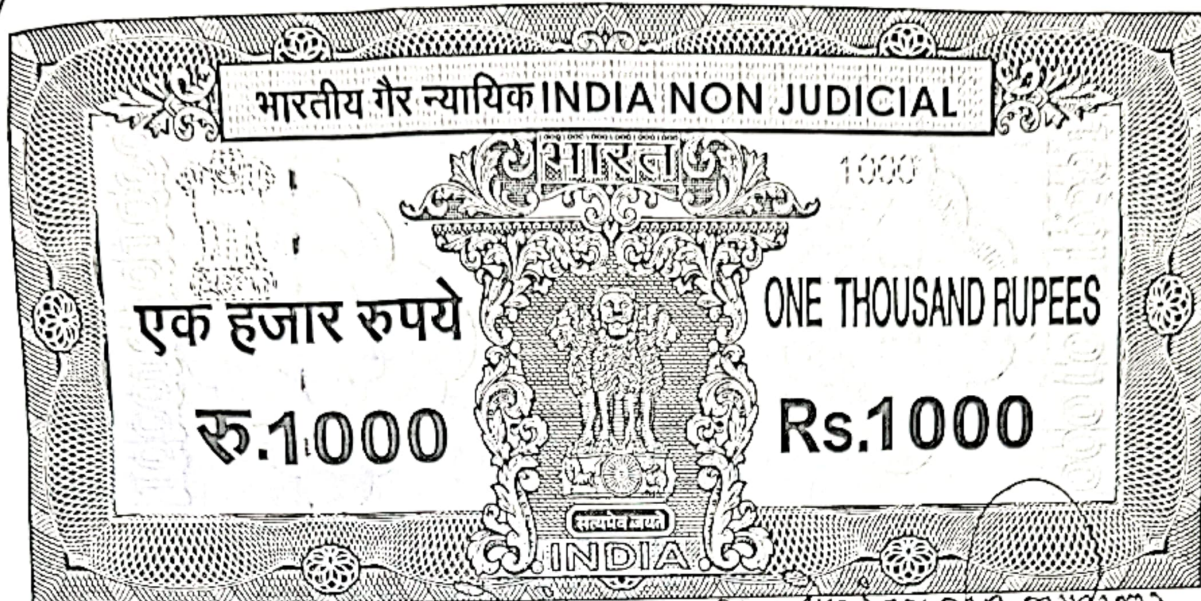

870 गंगेश शंकर नारायण शर्मा 25/07/2025
सहरसा जिला निबंधन परिसर
अनुज्ञप्ति सं- 3588/2025

प्रमोद नारायण सिंह
मूदांक दिक्कत
जिला निबंधन परिसर, सहरसा
अनुज्ञप्ति सं- 3588/2025

This Stamp Paper is an
Integral Part & Parcel of Bank Guarantee.
Number. 3588IGP003045125 dt. 30.07.2025



वास्ते बैंक ऑफ बड़ोदा
FOR BANK OF BARODA

Chief Manager K-2339
सहरसा शाखा/Saharsa Branch
K. Gaurav.

M/S Rajesh Ranjay Construction
Ranjay Raj
Proprietor

Executive Engineer
R.W.D. Works Division
Simarbakhtiyapur

PHYSICAL ISSUANCE OF BANK GUARANTEE

PERFORMANCE BANK GUARANTEE (UNCONDITIONAL)

BG NO.: 3588IGP003045125
DATE OF BANK GUARANTEE: 30.09.2025
VALIDITY OF BANK GUARANTEE: 18.09.2032
CLAIM PERIOD OF BANK GUARANTEE: 18.09.2032
CLAIM EXPIRY DATE: 18.09.2032
AMOUNT OF BANK GUARANTEE: RS.8,65,500.00

TO,
THE EXECUTIVE ENGINEER
R.W.D, WORKS DIVISION, SIMRI BAKHTIYARPUR

WHEREAS RAJESH RANJAY CONSTRUCTION (PROP-RANJAY RAJ), ADD-S/O AMRESH YADAV, AT-BHAGWANPUR, WARD NO-02, POST-SAMDA, PS-SOUR BAZAR, DIST-SAHARSA (BIHAR) PIN CODE-852202. (NAME AND ADDRESS OF CONTRACTOR) (HEREAFTER CALLED THE CONTRACTOR) HAS UNDERTAKEN IN PURSUANCE OF CONTRACT NO 2467, DATED 15.09.2025 AND 2140, DATED 16.09.2025 TO EXECUTE UNDER HEAD- MMGSY-NDB, (1) PAHARPUR TO KHOTAH (LENGTH-2.080) (2) SAKHUA DURGA MANDIR SE MURHO SIMA TAK (LENGTH-0.950) (PACKAGE NO-MMGSY AWASESH-NDB-BRRP2-864-SIMRI BAKHTIYARPUR) IN DISTRICT SAHARSA (BIHAR), TENDER ID 142942, BID ID 624563 (NAME OF CONTRACT AND BRIEF DESCRIPTION OF WORKS) (HEREINAFTER CALLED THE CONTRACT).

AND WHEREAS IT HAS BEEN STIPULATED BY YOU IN THE SAID CONTRACT THAT THE CONTRACTOR SHALL FURNISHED YOU WITH A BANK GUARANTEE BY A RECOGNIZED BANK FOR THE SUM SPECIFIED THEREIN AS SECURITY FOR COMPLIANCE WITH HIS OBLIGATION IN ACCORDANCE WITH THE CONTRACT.

AND WHEREAS WE HAVE AGREED TO GIVE THE CONTRACTOR SUCH A BANK GUARANTEE:

NOW THEREFORE WE BANK OF BARODA OF INDIA HAVING OUR REGISTERED OFFICE AT BARODA BHAVAN, R C DUTT ROAD, ALKAPURI, VADODARA, GUJARAT 390007 HEREBY AFFIRM THAT WE ARE THE GUARANTOR AND RESPONSIBLE TO YOU ON BEHALF OF THE CONTRACTOR, UP TO TOTAL OF RS.8,65,500/- (RUPEES EIGHT LAKH SIXTY FIVE THOUSAND FIVE HUNDRED ONLY), SUCH SUM BEING PAYABLE IN THE TYPES AND PROPORTIONS OF CURRENCIES IN WHICH THE CONTRACT PRICE IS PAYABLE, AND WE UNDERTAKE TO PAY YOU, UPON YOUR FIRST WRITTEN DEMAND AND WITHOUT CAVIL OR ARGUMENT, ANY SUM OR SUMS WITHIN THE LIMIT OF RS.8,65,500/- (RUPEES EIGHT LAKH SIXTY FIVE THOUSAND FIVE HUNDRED ONLY) AS

BANK OF BARODA SAHARSA, BIHARINDIRA BHAWAN, VIP RD. PURAB BAZAR, SAHARSA
PHONE NUMBER: , FAX NUMBER: , EMAIL: SAHARS@BANKOFBARODA.CO.IN
SWIFT: BARB XZ 04 561



Rajesh Ranjay Construction
Ranjay Raj
Proprietor

Executive Engineer
R.W.D. Works Division
Simri Bakhtiyapur

॥ ॥ ॥ ॥ **Bank of Baroda**

Chief Manager
K. Gaurav, Chief Manager
code: K-2359

AFORESAID WITHOUT YOUR NEEDING TO PROVE OR TO SHOW GROUNDS OR REASONS FOR YOUR DEMAND FOR THE SUM SPECIFIED THEREIN.

WE HEREBY WAIVE THE NECESSITY OF YOUR DEMANDING THE SAID DEBT FROM THE CONTRACTOR BEFORE PRESENTING US WITH THE DEMAND.

WE FURTHER AGREE THAT NO CHANGE OR ADDITION TO OR OTHER MODIFICATION OF THE TERMS OF THE CONTRACT OR OF THE WORKS TO BE PERFORMED THERE UNDER OR OF ANY OF THE CONTRACT DOCUMENTS WHICH MAY BE MADE BETWEEN YOU AND THE CONTRACTOR SHALL IN ANY WAY RELEASE US FROM ANY LIABILITY UNDER THIS GUARANTEE AND WE HEREBY WAIVE NOTICE OF ANY SUCH CHANGE, ADDITION OR MODIFICATION.

THIS GUARANTEE SHALL BE VALID UNTIL 18.09.2032 FROM THE DATE OF EXPIRY OF THE DEFECT LIABILITY PERIOD.

THE GUARANTOR BANK HEREBY CONFIRMS THAT IT IS ON THE SFMS (STRUCTURAL FINANCE MESSAGING SYSTEM) PLATFORM AND SHALL INVARIABLY SEND AN ADVICE OF THIS BANK GUARANTEE TO THE DESIGNED BANK SBI HAVING FOLLOWING DETAILS:

SL NO. PARTICULARS: DETAILS

1. NAME OF THE BENEFICIARY: EXECUTIVE ENGINEER, RWD, WORKS DIVISION, SIMRI BAKHTIYARPUR
2. NAME OF THE BANK: STATE BANK OF INDIA VISHESHVESARAIYA BHAWAN CAMPUS, BAILEY ROAD, PATNA 800015
3. IFSC CODE: SBIN0006379
4. EMAIL ID: EE.SIMRIBAKHTIYARPUR@GMAIL.COM

NOTWITHSTANDING ANYTHING TO THE CONTRARY CONTAINED HEREIN ABOVE.

- I) OUR LIABILITY UNDER THIS BANK GUARANTEE SHALL NOT EXCEED RS.8,65,500/- (RUPEES EIGHT LAKH SIXTY FIVE THOUSAND FIVE HUNDRED ONLY)
- II) THIS GUARANTEE SHALL BE VALID UP TO 18.09.2032 AND
- III) WE ARE LIABLE TO PAY THE GUARANTEED AMOUNT OR ANY PART THEREOF UNDER THIS BANK GUARANTEE ONLY AND ONLY IF YOU SERVED UPON US A WRITTEN CLAIM OR DEMAND ON OR BEFORE 18.09.2032.

THIS BANK GUARANTEE IS NOT ASSIGNABLE AND NOT TRANSFERABLE TO THIRD PARTY.

THIS GUARANTEE WILL BE OPERATIVE WHEN ACCOMPANIED WITH ADVICE (SFMS) ISSUED FROM THE ADVISING BANK.

SIGNATURE AND SEAL OF THE GUARANTOR

NAME OF BANK: BANK OF BARODA
BRANCH: SAHARSA



बुलंद शर्मा / For Bank of Baroda
प्रधिकृत अधिकारी / Authorized Officer
एन.ए. शाखा / Saharsa Branch
K. Gaurav, Chief Manager
code: K-2339

BANK OF BARODA SAHARSA, BIKARINDIRA BILAWAN, VIP RD, PURAB BAZAR, SAHARSA
PHONE NUMBER: , TAX NUMBER: , EMAIL: SAHARSA@BANKOFBARODA.CO.IN
SWIFT: BARB XZ 04 381

M/S Rajesh Ranjay Construction
Ranjay Raj
Proprietor

Executive Engineer
R.W.D. Works Division
Simarbakhtiyapur

कार्यपालक अभियंता का कार्यालय
ग्रामीण कार्य विभाग, कार्य प्रमंडल, सिमरी बख्तियारपुर।
Email ID :- ee.simribakhtiyarpur@gmail.com (Mob-8986915464)

सिमरी बख्तियारपुर, दिनांक- 25.09.25

पत्रांक- 2250 /
प्रेषक,

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,
कार्य प्रमंडल सिमरी बख्तियारपुर।

सेवा में,

Rajesh Ranjay Construction (Prop-Ranjay Raj),
Add-S/o Amresh Yadav, At-Bhagwanpur,
Ward No-02, Post-Samda, Ps-Sour Bazar,
Dist-Saharsa (Bihar) Pin code-852202

विषय : शीर्ष MMGSY (AWSESH-NDB) के अंतर्गत Construction of Road From (1) Paharpur to Khotahi (Length-2.500) (2) Sakhua Durga Mandir se Murho Sima Tak (Length-0.950) (Package No-MMGSY AWASESH-NDB-BRRP2-864-Simri Bakhtiyarpur) Tender Id-142942 & Bid Id- 624563 पथ निर्माण कार्य का एकरारनामा हेतु अग्रधन/अतिरिक्त प्रदर्शन की राशि जमा करने के संबंध में।

प्रसंग : अभियंता प्रमुख-सह-अपर आयुक्त-सह-विशेष सचिव, ग्रामीण कार्य विभाग, बिहार, पटना का पत्रांक-2467 ,पटना दिनांक-15.09.2025 एवं मुख्य अभियंता-4, (पूर्णीयाँ), का पत्रांक-....., दिनांक-..... तथा इस कार्यालय का पत्रांक-2140, दिनांक-16.09.2025

महाराज,

उपर्युक्त विषयक प्रासांगिक पत्र के संदर्भ में कहना है कि शीर्ष MMGSY (AWSESH-NDB) के अंतर्गत Construction of Road From (1) Paharpur to Khotahi (Length-2.500) (2) Sakhua Durga Mandir se Murho Sima Tak (Length-0.950) (Package No-MMGSY AWASESH-NDB-BRRP2-864-Simri Bakhtiyarpur) Tender Id-142942 & Bid Id- 624563 पथ निर्माण कार्य परिमाण विपत्र की दर से 1.76 प्रतिशत कम दर पर मो. 4,32,65,425.00 रुपये मात्र का आपको विभाग द्वारा आवंटित के पश्चात् इस कार्यालय के पत्रांक-2140, दिनांक-16.09.2025 के द्वारा कार्यदेश (LOA) निर्गत करते हुये आपको निर्देश दिया गया था कि Performance Security की राशि मो0-8,65,500.00 (सात वर्ष अठाईस दिनों की वैधता के साथ) एवं Additional Performance Guarantee की राशि मो0 2,20,500.00 (एक वर्ष की वैधता के साथ) एवं वर्क प्रोग्राम, नन ज्युडिशियल स्टाम्प, इस कार्यालय को समर्पित करें ताकि कार्यहित में ससमय एकरारनामा किया जा सके। लेकिन आपके द्वारा आज तक एकरारनामा हेतु वांछित कागजात एवं शेष अग्रधन की राशि जमा नहीं की गई है, माह अक्टूबर के प्रथम सप्ताह में आचार संहिता लगने की संभावना है।

अतः निर्देश दिया जाता है कि जल्द से जल्द एकरारनामा हेतु वांछित कागजात इस कार्यालय को समर्पित करें। अन्यथा आपको आवंटित कार्य रद्द करने हेतु उच्चाधिकारी को अनुशंसा कर दी जायेगी। जिसके लिए आप स्वयं जिम्मेवाद होंगे।

विश्वासभाजन,

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग,

कार्य प्रमंडल, सिमरी बख्तियारपुर।

25/09/25

M/S Rajesh Ranjay Construction
Ranjay Raj
Proprietor

Executive Engineer
R.W.D. Works Division
Simribakhtiyarpur

26/10/25

OFFICE OF THE EXECUTIVE ENGINEER
Rural Works Department, Work Division, Simri Bakhtiyarpur
Email ID :- cc.simribakhtiyarpur@gmail.com (Mob-8286215464)

(MMGSY-AWSESH-NDB)
LETTER OF ACCEPTANCE

Letter No- 2140

Simri Bakhtiyarpur/Date :- 16.09.25

From,

Executive Engineer,
Rural Works Department,
Works Division, Simri Bakhtiyarpur.

To,

Rajesh Ranjay Construction (Prop-Ranjay Raj),
Add-S/o Amresh Yadav, At-Bhagwanpur,
Ward No-02, Post-Samda, Ps-Sour Bazar,
Dist-Saharsa (Bihar) Pin code-852202

Dear Sir,

This is to notify you that your Bid dated 23.07.2025 for execution of construction and Routine Maintenance of the works for Construction of Road From (1) *Paharpur to Khotahi (Length-2.500)* (2) *Sakhua Durga Mandir se Murho Sima Tak (Length-0.950) (Package No-MMGSY AWASESH-NDB-BRRP2-864-Simri Bakhtiyarpur) Tender Id-142942 & Bid Id- 624563* the Contract Price of Rupees Rs.- 4,32,65,425.00 (Four crore thirty two lakh sixty five thousand four hundred twenty five only..) as corrected and modified in accordance with the Instruction to Bidders is hereby accepted by our Agency.

You are hereby requested to furnish Performance Security and additional security for unbalanced bids in terms of ITB Clause 27.4, for an amount of Rs.- 8,65,500.00 (Rupees Eight lakh sixty five thousand & five hundred only..) & Rs. 2,20,500.00 (Twenty Two lakh twenty thousand & five hundred only.) Hence Total Amount- 10,86,000.00 (Twenty Ten lakh eighty six thousand only.) within 15 days in accordance with the Conditions of Contract using for that Purpose form in Section VIII annex D and sign the contract, failing with action as stated in Para 34.2 of ITB will be taken.

Your Faithfully

Executive Engineer

Rural Works Division, Simri Bakhtiyarpur.

Letter No. 2140

Date 16.9.25

Copy to :- A.E., Rural Works Department, Works Sub-Division, Patarghat/ J.E., R.W.D, Works Section- Patarghat for kind information and necessary action.

Executive Engineer

Rural Works Division, Simri Bakhtiyarpur.

Letter No. 2140

Date 16.9.25

Copy to :- S.E., R.W.D, Works Circle Saharsa/ CE-4, RWD, (Purnia)/ Nodal officer MMGSY, RWD, Patna, (Bihar) for kind information and necessary action

Executive Engineer

Rural Works Division, Simri Bakhtiyarpur

M/S Rajesh Ranjay Construction
Ranjay Raj
Proprietor

Executive Engineer
R.W.D. Works Division
Simri Bakhtiyarpur

बिहार सरकार
ग्रामीण कार्य विभाग

पत्रांक:- BRRDA(HQ)MMGSY(NDB)-552/24- 2467 /पटना, दिनांक 75/9/25
प्रेषक,

ई० निर्मल कुमार,
अभियंता प्रमुख-सह-अपर
आयुक्त-सह-विशेष सचिव।

सेवा में,

मुख्य अभियंता-4 (पूर्णिमा),
ग्रामीण कार्य विभाग।

विषय:- मुख्यमंत्री ग्राम सम्पर्क योजना (अवशेष) अन्तर्गत Tender ID-142942 के निविदा निष्पादन के संबंध में।

महाराज,

उपर्युक्त विषय के संबंध में कहना है कि मुख्यमंत्री ग्राम सम्पर्क योजना (अवशेष) अन्तर्गत Tender ID-142942 के वित्तीय बीड के प्रस्ताव पर दिनांक-09.09.2025 को अपर मुख्य सचिव महोदय की अध्यक्षता में सम्पन्न निविदा समिति की बैठक की कार्यवाही की छायाप्रति नियमानुसार अग्रेतर कार्रवाई हेतु संलग्न कर भेजी जा रही है।

अनुरोध है कि उक्त कार्यवाही में अंकित निविदा का कार्य आवंटन आदेश निर्गत कर एक प्रति ज्ञापन लगाकर नोडल पदाधिकारी, MMGSY को e-mail के माध्यम से उपलब्ध कराना सुनिश्चित करें।

निर्धारित समय सीमा में निर्दिष्ट कार्य का पूरा किया जाना अनिवार्य है।

अनु०:- विभागीय निविदा समिति की कार्यवाही की छायाप्रति।


विश्वासभाजन


(निर्मल कुमार)

अभियंता प्रमुख-सह-अपर
आयुक्त-सह-विशेष सचिव


ज्ञापांक:- BRRDA(HQ)MMGSY(NDB)-552/24- 2467 /पटना, दिनांक-15/9/25
प्रतिलिपि:- अधीक्षण अभियंता, ग्रा०का०वि०, कार्य अंचल, सहरसा/कार्यपालक अभियंता, ग्रा०का०वि०, कार्य प्रमंडल, सिमरी-बख्तियारपुर/नोडल पदाधिकारी, e-advertisement-cum-e-tendering cell, ग्रामीण कार्य को सूचनार्थ एवं आवश्यक कार्रवाई हेतु प्रेषित।

अनु०:- विभागीय निविदा समिति की कार्यवाही की छायाप्रति।


अभियंता प्रमुख-सह-अपर
आयुक्त-सह-विशेष सचिव

ज्ञापांक:- BRRDA(HQ)MMGSY(NDB)-552/24- 2467 /पटना, दिनांक-15/9/25
प्रतिलिपि:- IT Manager, ग्रामीण कार्य विभाग को सूचनार्थ एवं विभाग के वेबसाइट पर अपलोड करने हेतु प्रेषित।

अनु०:- विभागीय निविदा समिति की कार्यवाही की छायाप्रति।


अभियंता प्रमुख-सह-अपर
आयुक्त-सह-विशेष सचिव

M/S Rajesh Ranjay Construction
Ranjay Ray
Proprietor

Executive Engineer
R.W.D. Works Division
Singhbakhtiyapur

192

बिहार सरकार
ग्रामीण कार्य विभाग

दिनांक:- ०९/११/२५ को अपर मुख्य सचिव, ग्रामीण कार्य विभाग की अध्यक्षता में सम्पन्न विभागीय निविदा समिति की बैठक की कार्यवाही।

समिति हेतु नामित पदाधिकारी :-

श्री दीपक कुमार सिंह, अपर मुख्य सचिव, ग्रामीण कार्य विभाग —अध्यक्ष
श्री निर्मल कुमार, अभियंता प्रमुख-सह-अपर आयुक्त-सह-विशेष सचिव, ग्रामीण कार्य विभाग —सदस्य
श्री सुधीर कुमार, मुख्य अभियंता-4 (पूर्णिमा), ग्रामीण कार्य विभाग —सदस्य
श्री आमिर नैय्यर, आंतरिक वित्तीय सलाहकार, ग्रामीण कार्य विभाग —सदस्य

2. बैठक में **"मुख्यमंत्री ग्राम संपर्क योजना (अवशेष)"** अन्तर्गत e-tendering के माध्यम से प्राप्त की गयी निम्नवत् तालिका के क्रमांक-1 के निविदा समूह के तकनीकी बीड पर सक्षम प्राधिकार की अध्यक्षता में गठित तकनीकी बीड मूल्यांकन समिति द्वारा तकनीकी बीड में योग्य घोषित निविदाकारों के वित्तीय बीड की तुलनात्मक विवरणी के आलोक में न्यूनतम दर उद्धृत करने वाले निविदाकारों के वित्तीय बीड के प्रस्ताव पर विचार हेतु विभागीय निविदा समिति के समक्ष उपस्थापित किया गया जिसकी विवरणी निम्नवत् तालिका **"Summary of Financial Bids"** के अनुरूप है।

उपर्युक्त के संदर्भ में इस समिति के द्वारा सम्यक विचारोपरांत तालिका में वर्णित न्यूनतम दर के निविदाकार (L1) के स्तम्भ "12" में निवेदित राशि पर स्तम्भ "13" के अनुसार निम्नवत् निर्णय लिया गया :-

Summary of Financial Bids												
Sl. No.	Division	File No.-(Technical Bid) BRDA (HQ-MMGSY (NDB))	NIT No./ Last Date of Receipt	PR No. & Date of Publication	Package No./ Tender ID	AA Amount (In Lacs)	Bid Aml. (In Rs.)	No. of Bidders Qualified in Tech. Bid/Total Number of Bidder	Name of Bidder for Financial Proposal (Bid ID)	Quoted Rate (%) (a)/(b)	Tender Award Amount (In Rs.)	Remarks
1	Simri Bakhtiyapur	55224	RWD/MMGSY (AWSESH)/HQ/ET/2025-26/02(R) 19.06.2025	005465(RWD) 2025-26 07.06.2025	MMGSY(AWSESH)-NDB BRRP2- 864-Simri Bakhtiyapur (Tender ID- 2025_RWD_142942_1)	509.580	44040338.70	2/2	Rajesh Ranjay Construction (Bid ID-624563)	-1.76	43265425.22 (Four Crore Thirty Two Lakh Sixty Five Thousand Four Hundred and Twenty Five)	Approved as per lowest quoted rate i.e., L1
									Bijay Bhushan Singh (Bid ID-624454)	-0.50		

3. स्वीकृत निविदा समूह के कार्य आवंटन आदेश निर्गत करने के पूर्व संबंधित कार्यपालक अभियंता, NIT एवं SBD के निम्न तथ्यों से संतुष्ट हो लेंगे:-

- पैकेज में अंकित योजनाओं पर सक्षम प्राधिकार द्वारा प्रशासनिक अनुमोदन तथा तकनीकी स्वीकृति प्रदान की गयी है एवं परिमाण विपत्र अनुमोदित है। यदि परिमाण विपत्र की राशि मूल प्रशासनिक अनुमोदन की राशि की अनुज्ञेय सीमा से अधिक है, तो पुनरीक्षित प्रशासनिक अनुमोदन प्राप्त कर लिया जाए।
- SBD (ITB)की कंडिका-16 के आलोक में वांछित अग्रधन की राशि विहित प्रपत्र में है तथा उसकी वैधता है, का मिलान कर ही कार्य आवंटन आदेश निर्गत करेंगे।
- पैकेज संख्या, पथ/पुल का नाम, परिमाण विपत्र की राशि, तकनीकी स्वीकृति की राशि, संवेदक द्वारा उद्धृत दर, परक्रमित दर, Bid Capacity आदि सही है। संवेदक के Bid Validation Period एवं वांछित Bid Capacity की राशि का मिलान कर ही कार्य आवंटन आदेश निर्गत करेंगे।

MS Rajesh Ranjay
Proprietor

Executive Engineer
R.W.D. Works Division
Simrabakhtiyapur

- (iv) संवेदक Defaulter/ काली सूची/ कार्यों को लंबित रखने वाले संवेदकों की सूची में नहीं है।
- (v) कार्य आवंटन आदेश निर्गत करने के पूर्व चरित्र प्रमाण पत्र के संबंध में निर्गत विभागीय पत्रांक-14/अप्रो-03-21/2021-4192 अनु०, दिनांक-29.07.2024 के दिशा-निर्देशों का अनिवार्य रूप से अक्षरशः अनुपालन कराया जाना सुनिश्चित करेंगे।
- (vi) SBD (ITB) की सुसंगत कंडिका 4.4B(b)(i) & 4.4B(b)(ii) के अनुसार संवेदक से प्राप्त शपथ पत्र के अनुरूप उक्त निर्माण कार्य हेतु Key Equipment /Machinery & Lab Equipment तथा Key Personnel की उपलब्धता सुनिश्चित कर लेंगे।
4. एकरारनामा के पूर्व संबंधित कार्यपालक अभियंता निविदा में सभी अभिलेख की मूल प्रति से सत्यापित कर संतुष्ट हो लेंगे।
5. संबंधित अधीक्षण अभियंता एकरारनामा, General Condition of Contract (GCC) की सभी कंडिकाओं के अनुपालन सुनिश्चित कराने हेतु साप्ताहिक अन्तराल पर कार्यों का भौतिक पर्यवेक्षण करेंगे तथा मुख्य रूप से निम्न कंडिकाओं को कड़ाई से अनुपालन सुनिश्चित करायेंगे:-
- (i) संवेदक के द्वारा कार्यों को Sublet करने से पूर्व संबंधित कार्यपालक अभियंता से लिखित अनुमति प्राप्त करना अनिवार्य है तथा संवेदक के द्वारा किसी भी परिस्थिति में कार्य के 25% से अधिक की राशि का कार्य Sublet नहीं किया गया है। (कंडिका-7)
- (ii) संवेदक द्वारा कार्य के लिये निविदा में निर्धारित कर्मियों को स्थल पर प्रतिनियुक्त किया गया है। (कंडिका-9)
- (iii) Contractor's Risk के अन्तर्गत आने वाले मर्दों के लिये निर्धारित अवधि के लिये नियोक्ता एवं संवेदक के संयुक्त नाम से बीमा करा लिया गया है। बीमा पॉलिसी एवं बीमा कराने का प्रमाण पत्र संवेदक द्वारा कार्य प्रारंभ से पूर्व संबंधित कार्यपालक अभियंता को उपलब्ध कराया जाना आवश्यक है। (कंडिका-13)
- (iv) निविदा में निर्धारित Key Equipments/Machinery स्थल पर उपलब्ध करा दिया गया है। (Contract Data का क्रमांक-15)
- (v) संवेदक द्वारा ग्रामीण पथों के लिए निर्धारित विशिष्टियों और अनुमोदित नक्शा के आलोक में गुणवत्ता के साथ कार्य पूर्ण कराये जाने हेतु संबंधित कार्यपालक अभियंता के निर्देशानुसार अतिरिक्त यंत्र-संयंत्र एवं कर्मी कार्य स्थल पर लगाया गया है। (कंडिका-16)
- (vi) Work Programme समर्पित किया गया है। (कंडिका-17)
- (vii) कार्य स्थल पर प्रयोगशाला स्थापित किया गया है तथा उसमें निविदा में निर्धारित उपकरण उपलब्ध है। (Contract Data sheet का क्रमांक-18)
- (viii) संवेदक से कार्य के लिए निर्धारित लक्ष्यों को ससमय पूर्ण न किये जाने पर संवेदक से एकरारनामा के अनुसार Liquidity Damage वसूल किया जा रहा है। (कंडिका-44.1)
- (ix) संवेदक के द्वारा "As Built" Drawing आवश्यकतानुसार संबंधित कार्यपालक अभियंता को उपलब्ध कराया जा रहा है। (कंडिका-51)
- (x) संवेदक द्वारा बिना अनुमति एवं पूर्व सूचना के कार्य को 28 दिनों से अधिक अवधि तक बंद नहीं रखा जा रहा है। (कंडिका-52.2(a))
- (xi) संवेदक को कार्य सुधार के लिए दिये गये निदेश के आलोक में कार्य सम्पादित किया जा रहा है। (कंडिका-52.2(c))
- (xii) संवेदक द्वारा आवश्यकतानुसार प्रतिभूतियों का Extension कराया जा रहा है। (कंडिका-46.2 एवं 52.2(d))
6. संबंधित अधीक्षण अभियंता पर्यवेक्षण के उपरांत साप्ताहिक अन्तराल पर उपर्युक्त बिन्दुओं के संबंध में प्रतिवेदन अपर मुख्य कार्यपालक पदाधिकारी-सह-सचिव, BRPDA को समर्पित करना

M/S Rajesh Ranjay Construction
Ranjay Raj
Proprietor

Executive Engineer
R.W.D. Works Division
Simla
06/10/24

- सुनिश्चित करेंगे। किसी भी विचलन की रिश्ति में एकरारनामा की शर्तों के आलोक में तत्काल कार्रवाई की विवरणी भी प्रतिवेदन में देंगे।
7. अपर मुख्य कार्यपालक पदाधिकारी-सह-सचिव, BRRDA कार्यों की समीक्षा मासिक अन्तराल पर करेंगे, जिसमें संबंधित अधीक्षण अभियंता समेकित प्रतिवेदन के साथ उपस्थित होंगे।
 8. निविदा निष्पादन के क्रम में किसी प्रकार की त्रुटि पाये जाने पर मुख्यालय को तुरंत सूचित किया जाए।
 9. कार्य आवंटन आदेश में संवेदक का निबंधन संख्या, पूर्ण पता एवं दूरभाष संख्या अवश्य अंकित किया जाए।
 10. संबंधित कार्यपालक अभियंता यह सुनिश्चित करेंगे SBD के सुसंगत कंडिकाओं के आलोक में Earnest Money/Security Deposit/Performance Security के रूप में दिये गये Bank Guarantee/ अन्य उपकरण बिहार में अवस्थित राष्ट्रीय/अनुसूचित बैंकों/डाकघरों द्वारा ही निर्गत हो तथा संबंधित शाखा से सत्यापित किया गया हो।
 11. संबंधित कार्यपालक अभियंता, ग्रामीण कार्य विभाग सफल निविदाकार को 24 घंटे के भीतर Letter of acceptance (LOA) निर्गत करते हुए इसकी प्रति संबंधित अधीक्षण अभियंता, मुख्य अभियंता, अपर मुख्य कार्यपालक पदाधिकारी-सह-सचिव, BRRDA एवं अभियंता प्रमुख को उपलब्ध कराना सुनिश्चित करेंगे।

(आमीर नैय्यर)
आंतरिक वित्तीय सलाहकार,
ग्रामीण कार्य विभाग,
बिहार, पटना।

(सुधीर कुमार)
मुख्य अभियंता-4
(पूर्णिमा),
ग्रामीण कार्य विभाग।

(निर्मल कुमार)
अभियंता प्रमुख-सह-अपर
आयुक्त-सह-विशेष सचिव
ग्रामीण कार्य विभाग,
बिहार, पटना।

(दीपक कुमार सिंह)
सरकार के अपर मुख्य सचिव,
ग्रामीण कार्य विभाग,
बिहार, पटना।

M/S Rajesh Ranjay Construction
Ranjay Ray
Proprietor

Executive Engineer
R.W.D. Works Division
Simarbakhtiyapur

Mukhya Mantri Gram Sampark Yojna (MMGSY)- NDB(AWSESH)

BILL OF QUANTITIES (BOQ) - CONSTRUCTION

NAME OF ROAD : paharpur To khotahi

SURVEY ID : 30172

BLOCK : Patarghat

DISTRICT :

Saharsa

DIVISION :

Simri Bakhtiyarpur

Sl. No.	SDB SL.NO	Description	QUANTITY	Unit	RATE	AMOUNT (in Rs.)
SUB HEAD : PREPARATORY WORKS, SITE CLEARANCE, DISMANTLING						
1	1.16	Setting Out Pillars :-Providing & Fixing of Working benchmark Pillars 01 nos. per km & 04 Nos. of reference pillars required for 1 Km. as per drawings given and	2.080	Km.	13,919.44	28,952.00
2	2.2	Clearing and Grubbing Road Land (By manual means) including uprooting wild vegetation , grass ,bushes ,shrubs , saplings and trees of girth upto 300mm , removals of stumps of such trees cut earlier & disposal of unserviceable materials & stacking of serviceable materials to be used or auctioned upto a lead of 1000 m including removal and disposal of top organic soil not exceeding 150mm in thickness as per technical specification - clause 201.1 and direction of E/I	1.24800	Ha.	70,258.500	87,683.00
3	3.4	Construction of Embankment with material obtained from borrow pits with a lift upto 1.5 m , transporting to the site spreading , grading to required slope and compacting to meet requirement of Tables 300.1 and 300.2 with a <u>lead upto 1000 m & 100 m</u> as per Technical Specification Clause 301.5 . (Including Royalty & Labour Cess).	702.52	cum	240.36	1,68,859.00
4		For 100 m lead	2,810.088	cum	169.66	4,76,770.00
5	3.14	Construction of subgrade and earthen shoulders:- with approved material obtained from borrow pits with all lifts and leads, transporting to site, spreading, grading to required slope and compacted to meet requirement of Table 300.2 with lead upto 1000 m & 100 m as per Technical Specification Clause 303.1. (Including Royalty & Labour Cess).	4,994.54	cum	243.63	12,16,799.00
6	4.1	Granular Sub-base with Well Graded Material (Table 400.1) For Grading I Material (With Stone Screening) Construction of granular sub-base by providing well graded material, spreading in uniform layers with motor grader on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with	1,164.94	cum	3,077.53	35,85,141.00
7	4.8 (3-A)	WBM Grading 3 (By Mechanical Means) Providing, laying, spreading and compacting stone aggregates of specific sizes to water bound macadam specification including spreading in uniform thickness, hand packing, rolling with smooth wheel roller 80-100 kN in stages to proper grade and camber, applying and brooming, stone screening to fill-up the interstices of coarse aggregate, watering and compacting to the required density Grading 3 as per Technical Specification Clause 405.	404.49	cum	4,908.64	19,85,496.00
8	5.1	Prime Coat (Low porosity) Providing and applying primer coat with Bitumen emulsion (SS-1) on prepared surface of granular base including cleaning of road surface and spraying primer at the rate of 0.90- 1.2 kg/sqm using mechanical means as per Technical Specification Clause 502.	5,393.25	Sqm	53.32	2,87,567.00

Executive Engineer
W.D. Works Division

Approved as Corrected Page 1

S.E.

R.W.D. Works Circle Saharsa

Sl. No.	SDB SL. NO	Description	QUANTITY	Unit	RATE	AMOUNT (in Rs.)
9	5.2	Tack Coat Providing and applying tack coat with bitumen emulsion using emulsion pressure distributor at the rate of 0.25 to 0.30 kg per sqm on the prepared granular surface treated with Primer and cleaned with hydraulic broom as per technical specification clause 503.	5,393.25	Sqm	18.32	98,777.00
10	5.9	Mix Seal Surfacing Providing, laying and rolling of close-graded premix surfacing material of 20 mm thickness composed of 11.2 mm to 0.9 mm (Type-A) or 13.2 mm to 0.9 mm (Type-B) aggregates using penetration grade bitumen to required line, grade and level to serve as wearing course on a previously prepared base, including mixing in a suitable plant, laying and rolling with a three wheel 8-10 kN static roller and finishing to required level and grades as per Technical Specification Clause 509	5,393.25	Sqm	328.42	17,71,231.00

S.M.
04/09/24
Executive Engineer,
R.W.D. Works Division,
Saharsa, Bihar

Approved as Corrected

S.M.
12.9.24

S.M.
12.09.24

S.E.,
R.W.D. Works Circle, Saharsa

Sl. No.	SDB SL. NO	Description	QUANTITY	Unit	RATE	AMOUNT (In Rs.)
SUB HEAD : CC PAVEMENT						
11	4.1	Granular Sub-base with Well Graded Material (Table 400.1) For Grading I Material (With Stone Screening) Construction of granular sub-base by providing well graded material, spreading in uniform layers with motor grader on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with smooth wheel roller to achieve the desired density, complete as per Technical Specification Clause 401.	256.28	cum	3,077.53	7,88,710.00
12	4.8 (3-A)	Water Bound Macadam with Stone Screenings WBM Grading 3 (By Mechanical Means) Providing, laying, spreading and compacting stone aggregates of specific sizes to water bound macadam specification including spreading in uniform thickness, hand packing, rolling with three wheel 80-100 kN static roller in stages to proper grade and camber, applying and brooming, crushable screening to fill-up the interstices of coarse aggregate, watering and compacting	192.21	cum	4,908.64	9,43,490.00
13	6.4	Cement Concrete Pavement Construction of un-reinforced, dowel jointed at expansion and construction joint only, plain cement thickness as per design, over a prepared sub base with 43 grade cement or any other type as per clause 1501.2.2 M 30 grade coarse and fine aggregate maximum size of aggregate not exceeding 25mm, mixed in a concrete of not less than 0.2cum capacity and appropriate weigh batcher using approved mix design, laid in approved fixed side formwork (steel channel, laying and fixing of 125 micron thick plythene film, wedges, steel plates including levelling the formwork as per drawing) spreading the concrete with shovels, rakes, compacted using needle, screed and plate vibrators and finished in continuous operation including provision of contraction and expansion, construction joints, applying debonding strips, primer, sealant, dowel bars, near approaches to bridge/ culvert and construction joints, admixtures as approved, curing of concrete slab for 14 days curing compound (where specified) and water finishing to lines and grade as per drawing and Technical specification clause 1501.	410.04	cum	9,167.24	37,58,936.00

CSB
09/09/24
Executive Engineer
R.W.D. Works Division.
Simla Bakhri, arpur

Approved as ~~Corrected~~

S.E.

R.W.D. Works Circle, Sahibzada

Wmy
12.9.24

12.09.24

Sl. No.	SDB SL.NO	Description	QUANTITY	Unit	RATE	AMOUNT (In Rs.)
SUB HEAD : ROAD FURNITURES , KM STONES , PMGSY LOGO						
	10.1	Kilometer stone Reinforced cement concrete M15 grade kilometer local stone of standard design as per IRC:8 fixing in position including painting and printing , etc as per drawing and				
14		ii) Ordinary Kilometer Stone (Precast)	4.00	Nos.	2,955.50	11,822.00
15		iii) 200 m stone (Precast)	9.00	Nos.	791.46	7,123.00
16	10.16	(I) Providing and Fixing 'Logo' of Project Providing and fixing of typical MMGSY informatory sign board with Logo as per MORD specifications and drawing. Three MS Plates of 1.6 mm thick, top and middle plate duly welded with MS flat iron 25mm x 5m size on back on edges. The lower plate will be welded with MS angle iron frame of 25mm x 25mm x 5mm. The angle iron frame of the lower most plate and flat iron frame of middle plate will be welded to 2 nos. 75mm x 75 mm of 12 SWG sheet tubes posts duly embedded in cement concrete M-15 grade blocks of 450mm x 450mm x 600mm, 600mm below ground level. The top most diamond plate will be welded to middle plate by 47mm x 47mm of 12 SWG steel plate tube. All M.S. will be stove enameled on both sides. Lettering and printing arrows, border etc. will be painted with ready mixed synthetic enamel paint of superior quality in required shade and colour. All sections of framed posts and steel tube will be painted with primer and two coats of epoxy paint as per drawing Clause 1701 and Annexure 1700.1 Providing and Fixing 'Logo' of Project As per Drawing Citizen Information Board As per Drawing 5-Year Informatory Maintenance Board	4.00	Nos.	13,965.38	55,862.00
17	10.1	Printing New Letters and Figures of any Shade Printing new letter and figures of any shade with synthetic enamel paint black or any other approved colour to give an even shade as per drawings and	396.00	per cm height per letter	0.70	277.00
SUB HEAD : TRAFFIC & DIRECTION SIGN & ROAD SAFETY WORK						
18	1011	Boundary Pillar/Gaurd Post Reinforced cement concrete M15 grade boundary pillars/local stone of standard design as per IRC:25, fixed in position including finishing and lettering but excluding painting as per drawing and Technical	112.00	Nos.	736.28	82,463.00
	8.38	Rumble Strips Provision of 15 nos rumble strips covered with premix bituminous carpet, 15-20 mm high at center, 250 mm wide placed at 1 m center to center at approved locations to control speed, marked with white strips of road marking paint.				
19		Premix Bituminous Carpet	3.38	Sqm	328.42	1,108.00
20		Road Marking Paint.	2.15	Sqm	801.58	1,719.00
	10.2	Traffic sign Providing and fixing of semi reflective cautionary , mandatory and informatory sign board as per IRC :67 made of 1.5 mm thick MS steel duly stove white colour in front and gray colour on back with red reflective border of 65 mm width and required letters and figures with reflective tape engineering grade as per clause 1701.3.9 of MORD for rural road of required shade and colour supported and welded on 47mmx47mmx12swg sheet tube firmly fixed to the ground by mean of properly designed foundation with M15 grade cement concrete 450x450x600 mm ,600mm below ground level				
21		i) 600 mm equilateral & triangle	11.00	Nos.	1,979.43	21,774.00
22		iii) 600 mm circular	2.00	Nos.	2,047.25	4,094.00

Approved as Corrected

S.E.

R.W.D. Works Circle, Saharsa

Executive Engineer
R.W.D. Works Circle

Sl. No.	SDB SL.NO	Description	QUANTITY	Unit	RATE	AMOUNT (in Rs.)
23		v) 600 mm x 450 mm rectangular	2.00	Nos.	2,040.30	4,081.00
24		vii) 900 mm side octagon, OR	2.00	Nos.	2,254.98	4,510.00
25	10.8	Road Marking with Hot Applied Thermoplastic Compound with Reflectorising Glass Beads on Bituminous Surface & Cement Concrete Pavement Providing and laying of hot applied thermoplastic compound 2.5 mm thick including reflectorising glass beads @ 250 gms per sqm area, thickness of 2.5 mm is exclusive of surface applied glass beads as per IRC:35 .The finished surface to be level, uniform and free from streaks and holes.	416.00	Sqm	801.58	3,33,457.00
26	Ref. to MoRTH Spec.307	Planting of Trees and their Maintenance for one Year Planting of trees by the road side (Avenue trees) in 0.60 m dia holes, 1 m deep dug in the ground, mixing the soil with decayed farm yard/sludge manure, planting the saplings, backfilling the trench, watering, fixing the tree	71	Each	1,185.67	84,183.00

Sm
04/09/24
Executive Engineer
R.W.D. Works Division.
Simri Bakhtiyarpur

Approved as Corrected

S.E.
R.W.D. Works Circle, Saharsa

my
12.9.24

Man
12.09.24

Sl. No.	SDB SL. NO	Description	QUANTITY	Unit	RATE	AMOUNT (in Rs.)
		HUME PIPE CULVERT				
27	9.1 / 11.1	Earth work in excavation for foundation of structures upto 3.0 m depth as per drawing and technical specification clause 1104	29.80	cum	370.58	11,043.00
28	11.4 (II)	Providing M15 (PCC 1:2.5:5) as levelling course in foundation :- Providing PCC M 15 (1:2.5:5) concrete for plain concrete in open foundations complete as per	4.60	cum	7,473.17	34,339.00
29	12.1	Plain/reinforced cement concrete in substructure complete as per drawings and technical specification Clauses 802, 804, 805, 806, 807, 1202 and 1204 (M20)	33.74	cum	8,353.92	2,81,886.00
30	9.3 (B)	Providing and laying RCC pipe NP-3 for culverts on first class bedding of PCC M10 material in single row including fixing collar with cement mortar 1:2 but	7.50	cum	7,009.63	52,572.00
31	9.1 / 11.1	Box culvert Earth work in excavation for foundation of structures	1060.08	Cum	370.58	3,92,844.00
32	11.4 (I)	Providing concrete for plain/reinforced concrete in open foundations complete as per drawings and technical specifications Clause 802, 803, 1202 & 1203	76.58	Cum	7806.43	5,97,790.00
33	11.4 (II)	Providing concrete for plain/reinforced concrete in open foundations complete as per drawings and technical specifications Clause 802, 803, 1202 & 1203	334.48	Cum	7473.17	24,99,622.00
34	11.7	Supplying, fitting and placing HYSD bar reinforcement in foundation complete as per drawings and technical specifications Clauses 1000 and 1202	1.27	MT	65413.28	82,833.00
35	12.5	Plain/reinforced cement concrete in substructure complete as per drawings and technical specification Clauses 802, 804, 805, 806, 807, 1202 and 1204	185.62	Cum	8002.08	14,85,314.00
36	12.9	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full	342.00	Nos	140.32	47,988.00
37	12.5 (iv)	Plain/reinforced cement concrete in substructure complete as per drawings and technical specification Clauses 802, 804, 805, 806, 807, 1202 and 1204 RCC M-	117.39	Cum	8950.20	10,50,664.00
38	12.6	Supplying, fitting and placing HYSD bar reinforcement (Fe 415) in substructure complete as per drawings and technical specification Clauses 1002, 1005, 1010 & 1202	11.55	MT	65607.18	7,57,970.00
39	12.10	Backfilling behind abutment, wing wall and return wall complete as per drawings & technical specification Clause 1204.3.8 (With Sandy Materials)	340.41	Cum	1005.96	3,42,435.00
40	12.11	Providing and laying filter media with granular crushed aggregates as per specification to a thickness of not less than 600 mm with smaller size towards the soil and	190.44	Cum	3873.44	7,37,652.00
41	12.5 (II)	Plain/reinforced cement concrete in substructure complete as per drawings and technical specification Clauses 802, 804, 805, 806, 807, 1202 and 1204 (Coping - PCC M-20 Grade)	107.20	Cum	8353.92	8,95,540.00
42	13.1	Providing and laying reinforced cement concrete in superstructure as per drawing and technical specifications Clauses 800, 1205.4 and 1205.5 RCC M-	48.26	Cum	9400.45	4,53,666.00
43	13.2	Supplying, fitting, and placing HYSD bar reinforcement in superstructure complete as per drawing and technical specifications Clauses 1002, 1010 and 1202	4.10	MT	67026.93	2,74,951.00
44	13.6	Construction of R.C.C. railing of M 25 grade in cast-in-situ with 20 mm nominal size aggregate, true to line and grade, tolerance of vertical railing post not to exceed 1 in	45.00	RM	8776.56	3,94,945.00
45	13.10	Construction of R.C.C. railing of M 25 grade in cast-in-situ with 20 mm nominal size aggregate, true to line and grade, tolerance of vertical railing post not to exceed 1 in	32.00	Nos	1263.13	40,420.00

Executive Engineer,
R.W.D. Works Division,
Sikar Bakht, Jodhpur

Approved as Corrected

S.E.
R.W.D. Works Circle, Sikar

Page 6

12.9.24
12.09.24

Sl. No.	SDB SL. NO	Description	QUANTITY	Unit	RATE	AMOUNT (in Rs.)
		Construction of Parapet Wall				
		Dismantling of Cross Drainage Works.				
	2.5	Dismantling of existing structures like culverts, bridges, retaining walls and other structure comprising of masonry, cement concrete, wood work, steel work,				
46	(B)	Cement Concrete	6.21	cum	630.41	3,915.00
47	(C)	Reinforced Cement Concrete	10.80	cum	1512.04	16,330.00
	2.6	Dismantling of existing structures like culverts, bridges, retaining walls and other structures comprising of brick masonry, including disposal of unserviceable material				
48	(B)	Cement mortar	129.69	cum	296.89	38,503.00
	2.7	Removing all types of Hume pipes and stacking including Earthwork and Dismantling of Masonry Works as per Technical Specification Clause 202.				
49	(B)	Above 600 mm to 900 mm dia Hume pipe	5.00	cum	325.20	1,626.00
50		(A) TOTAL COST OF CONSTRUCTION IN RS. =				2,63,05,732.00
51		Add Labour Cess @ 1%				2,63,057.00
52		Add Seigniorage Fee @ 10% on Material Cost only				3,49,873.00
53		Add GST @ 18%				47,35,032.00
54		Total Construction Cost with 18% GST, 1% L.C. & 10				3,16,53,694.00
55		Maintenance cost of Road	20	Quarterly	44,633.10	8,92,662.00
56		(B) TOTAL COST OF MAINTENANCE IN RS. =				8,927.00
57		Add Labour Cess @ 1%				2,841.00
58		Add Seigniorage Fee @ 10% on Material Cost only				1,60,679.00
59		Add GST @ 18%				10,65,109.00
60		Total Maintenance Cost with 18% GST, 1% L.C. & 10				3,27,18,803.00
61		Total Construction & Maintenance Cost with 18% GST, 1% L.C. & 10% S.F.				

RS 3,27,18,803=00

8/11/24
Executive Engineer
R.W.D. Works Division.
Sikri Bakhtiyarpur

Construction Cost Rs. 3,16,53,694=00
5 years Maintenance Cost Rs 10,65,109=00
total Amount of B.O.Q. Rs 3,27,18,803=00

B.O.Q. APPROVED FOR RS 3,27,18,803=00 (Rupees Three crore Twenty seven Lakh Eighteen Thousand Eight Hundred Three)

Approved & Corrected

S.E.
R.W.D. Works Circle, Saharsa

12.9.24

12.09.24

Mukhya Mantri Gram Sampark Yojna (MMGSY)- NDB(AWSESH)

BILL OF QUANTITIES (BOQ) - CONSTRUCTION

NAME OF ROAD : Sakhua durga mandir se To murho siman tak

SURVEY ID : 54193

DISTRICT :

Saharsa

BLOCK : Patarghat

DIVISION :

Simri Bakhtiyarpur

Sl. No.	SDB Sl. No	Description	QUANTITY	Unit	RATE	AMOUNT (in Rs.)
SUB HEAD : PREPARATORY WORKS ,SITE CLEARANCE , DISMANTLING						
1	1.16	Setting Out Pillars :-Providing & Fixing of Working benchmark Pillars 01 nos. per km & 04 Nos. of reference pillars required for 1 Km. as per drawings given and	0.950	Km.	13,919.44	13,223.00
2	2.2	Clearing and Grubbing Road Land (By manual means) including uprooting wild vegetation , grass ,bushes ,shrubs , saplings and trees of girth upto 300mm , removals of stumps of such trees cut earlier & disposal of unserviceable materials & stacking of serviceable materials to be used or auctioned upto a lead of 1000 m including removal and disposal of top organic soil not exceeding 150mm in thickness as per technical specification - clause 201.1 and direction of E/I	0.57000	Ha.	70,258.500	40,047.00
3	2.14.1	Box Cutting:-Excavation for roadway in soil using manual means for carrying of cut earth to embankment site with a lift upto 1.5 m and lead upto 50 m as per Technical Specification Clause 302.3	63.00	cum	95.86	6,039.00
4	3.3	Construction of embankment with approved material deposited from road way cutting and excavation from drain and foundation of other structures and excavated with an average lead of 100 m graded and compacted to meet requirement of tables 300.1 and 300.2 as per technical specification clause 301.5 (Including Royalty & Labour Cess). 60% QTY FROM EXCAVATED METARIAL From Box Cutting	37.80	cum	58.20	2,200.00
	3.4	Construction of Embankment with material obtained from borrow pits with a lift upto 1.5 m , transporting to the site spreading , grading to required slope and compacting to meet requirement of Tables 300.1 and 300.2 with a <u>lead upto 1000 m & 100 m</u> as per Technical Specification Clause 301.5 . (Including Royalty & Labour Cess).				
5		For 1000 m lead	293.26	cum	240.36	70,489.00
6		For 100 m lead	1,173.048	cum	169.66	1,99,024.00
7	3.14	Construction of subgrade and earthen shoulders:- with approved material obtained from borrow pits with all lifts and leads, transporting to site, spreading, grading to required slope and compacted to meet requirement of Table 300.2 with lead upto 1000 m & 100 m as per Technical Specification Clause 303.1. (Including Royalty & Labour Cess).	1,449.33	cum	243.63	3,53,094.00
8	4.1	Granular Sub-base with Well Graded Material (Table 400.1) For Grading I Material (With Stone Screening) Construction of granular sub-base by providing well graded material, spreading in uniform layers with motor grader on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with	388.31	cum	3,027.53	11,95,037.00

Executive Engineer
R.W.D Works Division
Simri Bakhtiyarpur

Approved as Corrected

S.E.

R.W.D. Works, Circle, Saharsa

Page 1

12/02/24

12/02/24

Sl.No.	SDB SL.NO	Description	QUANTITY	Unit	RATE	AMOUNT (in Rs.)
9	4.8 (3-A)	WBM Grading 3 (By Mechanical Means) Providing, laying, spreading and compacting stone aggregates of specific sizes to water bound macadam specification including spreading in uniform thickness, hand packing, rolling with smooth wheel roller 80-100 kN in stages to proper grade and camber, applying and brooming, stone screening to fill-up the interstices of coarse aggregate, watering and compacting to the required density Grading 3 as per Technical Specification Clause 405.	134.83	cum	4,908.64	6,61,832.00
10	5.1	Prime Coat (Low porosity) Providing and applying primer coat with Bitumen emulsion (SS-1) on prepared surface of granular base including cleaning of road surface and spraying primer at the rate of 0.90- 1.2 kg/sqm using mechanical means as per Technical Specification Clause 502.	1,797.75	Sqm	53.32	95,856.00
11	5.2	Tack Coat Providing and applying tack coat with bitumen emulsion using emulsion pressure distributor at the rate of 0.25 to 0.30 kg per sqm on the prepared granular surface treated with Primer and cleaned with hydraulic broom as per technical specification clause 503.	1,797.75	Sqm	18.32	32,926.00
12	5.9	Mix Seal Surfacing Providing, laying and rolling of close-graded premix surfacing material of 20 mm thickness composed of 11.2 mm to 0.9 mm (Type-A) or 13.2 mm to 0.9 mm (Type-B) aggregates using penetration grade bitumen to required line, grade and level to serve as wearing course on a previously prepared base, including mixing in a suitable plant, laying and rolling with a three wheel 8-10 kN static roller and finishing to required level and grades as per Technical Specification Clause 509	1,797.75	Sqm	328.42	5,90,410.00

804
04/9/24
Executive Engineer
R.W.D Works Division
Simri Bakhtiyarpur

Approved as Corrected

S.E.
R.W.D. Works Circle, Saharsa

12.09.24

12.9.24

Sl. No.	SDB SL.NO	Description	QUANTITY	Unit	RATE	AMOUNT (in Rs.)
SUB HEAD : CC PAVEMENT						
13	4.1	Granular Sub-base with Well Graded Material (Table 400.1) For Grading 1 Material (With Stone Screening) Construction of granular sub-base by providing well graded material, spreading in uniform layers with motor grader on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with smooth wheel roller to achieve the desired density, complete as per Technical Specification Clause 401.	51.12	cum	3,077.53	1,57,323.00
14	4.8 (3-A)	Water Bound Macadam with Stone Screenings WBM Grading 3 (By Mechanical Means) Providing, laying, spreading and compacting stone aggregates of specific sizes to water bound macadam specification including spreading in uniform thickness, hand packing, rolling with three wheel 80-100 kN static roller in stages to proper grade and camber, applying and brooming, crushable screening to fill-up the interstices of coarse aggregate, watering and compacting	137.70	cum	4,908.64	6,75,920.00
15	6.4	Cement Concrete Pavement Construction of un-reinforced , dowel jointed at expansion and construction joint only , plain cement thickness as per design , over a prepared sub base with 43 grade cement or any other type as per clause 1501.2.2 M 30 grade coarse and fine aggregate maximum size of aggregate not exceeding 25mm , mixed in a concrete of not less than 0.2cum capacity and appropriate weigh batcher using approved mix design ,laid in approved fixed side formwork (steel channel ,laying and fixing of 125 micron thick plythene film ,wedges ,steel plates including levelling the formwork as per drawing) spreading the concrete with shovels , rakes , compacted using needle, screed and plate vibrators and finished in continuous operation including provision of contraction and expansion , construction joints ,applying debonding strips , primer , sealant , dowel bars , near approaches to bridge/ culvert and construction joints, admixtures as approved , curing of concrete slab for 14 days curing compound (where specified) and water finishing to lines and grade as per drawing and Technical specification clause 1501.	293.76	cum	9,167.24	26,92,969.00

Executive Engineer
R.W.D Works Division
Simri Bakhtiyarpur

Approved as Corrected

S.E.

R.W.D. Works Circle, Saharsa

12.9.24

12.09.24

Sl. No.	SDB SL.NO	Description	QUANTITY	Unit	RATE	AMOUNT (in Rs.)
SUB HEAD : ROAD FURNITURES , KM STONES , PMGSY LOGO						
	10.1	Kilometer stone Reinforced cement concrete M15 grade kilometer local stone of standard design as per IRC:8 fixing in position including painting and printing , etc as per drawing and				
16		ii) Ordinary Kilometer Stone (Precast)	2.00	Nos.	2,955.50	5,911.00
17		iii) 200 m stone (Precast)	4.00	Nos.	791.46	3,166.00
18	10.16	(I) Providing and Fixing 'Logo' of Project Providing and fixing of typical MMGSY informatory sign board with Logo as per MORD specifications and drawing. Three MS Plates of 1.6 mm thick, top and middle plate duly welded with MS flat iron 25mm x 5m size on back on edges. The lower plate will be welded with MS angle iron frame of 25mm x 25mm x 5mm. The angle iron frame of the lower most plate and flat iron frame of middle plate will be welded to 2 nos. 75mm x 75 mm of 12 SWG sheet tubes posts duly embedded in cement concrete M-15 grade blocks of 450mm x 450mm x 600mm, 600mm below ground level. The top most diamond plate will be welded to middle plate by 47mm x 47mm of 12 SWG steel plate tube. All M.S. will be stove enameled on both sides. Lettering and printing arrows, border etc. will be painted with ready mixed synthetic enamel paint of superior quality in required shade and colour. All sections of framed posts and steel tube will be painted with primer and two coats of epoxy paint as per drawing Clause 1701 and Annexure 1700.1 Providing and Fixing 'Logo' of Project As per Drawing Citizen Information Board As per Drawing 5-Year Informatory Maintenance Board	3.00	Nos.	13,965.38	41,896.00
19	10.1	Printing New Letters and Figures of any Shade Printing new letter and figures of any shade with synthetic enamel paint black or any other approved colour to give an even shade as per drawings and	88.00	per cm height per letter	0.70	62.00
SUB HEAD : TRAFFIC & DIRECTION SIGN & ROAD SAFETY WORK						
20	1011	Boundary Pillar/Gaurd Post Reinforced cement concrete M15 grade boundary pillars/local stone of standard design as per IRC:25, fixed in position including finishing and lettering but excluding painting as per drawing and Technical	32.00	Nos.	736.28	23,561.00
	8.38	Rumble Strips Provision of 15 nos rumble strips covered with premix bituminous carpet, 15-20 mm high at center, 250 mm wide placed at 1 m center to center at approved locations to control speed, marked with white strips of road marking paint.				
21		Premix Bituminous Carpet	3.38	Sqm	328.42	1,108.00
22		Road Marking Paint.	2.15	Sqm	801.58	1,719.00
	10.2	Traffic sign Providing and fixing of semi reflective cautionary , mandatory and informatory sign board as per IRC :67 made of 1.5 mm thick MS steel duly stove white colour in front and gray colour on back with red reflective border of 65 mm width and required letters and figures with reflective tape engineering grade as per clause 1701.3.9 of MORD for rural road of required shade and colour supported and welded on 47mmx47mmx12swg sheet tube firmly fixed to the ground by mean of properly designed foundation with M15 grade cement concrete 450x450x600 mm ,600mm below ground level as per				
23		i) 600 mm equilateral & triangle	5.00	Nos.	1,979.43	9,897.00

Approved & Corrected

S.E.

R.W.D. Works, Circle, Saharsa

Sl. No.	SDB SL.NO	Description	QUANTITY	Unit	RATE	AMOUNT (In Rs.)
24		iii) 600 mm circular	2.00	Nos.	2,047.25	4,094.00
25		v) 600 mm x 450 mm rectangular	2.00	Nos.	2,040.30	4,081.00
26		vii) 900 mm side octagon, OR	1.00	Nos.	2,254.98	2,255.00
27	10.8	Road Marking with Hot Applied Thermoplastic Compound with Reflectorising Glass Beads on Bituminous Surface & Cement Concrete Pavement Providing and laying of hot applied thermoplastic compound 2.5 mm thick including reflectorising glass beads @ 250 gms per sqm area, thickness of 2.5 mm is exclusive of surface applied glass beads as per IRC:35 .The finished surface to be level, uniform and free from streaks and holes.	190.00	Sqm	801.58	1,52,300.00
28	Ref. to MoRTH Spec.307	Planting of Trees and their Maintenance for one Year Planting of trees by the road side (Avenue trees) in 0.60 m dia holes, 1 m deep dug in the ground, mixing the soil with decayed farm yard/sludge manure, planting the saplings, backfilling the trench, watering, fixing the tree	24	Each	1,185.67	28,456.00


Sd/-
09/09/24
Executive Engineer
R.W.D Works Division
Simri Bakhtiyarpur

Approved as Corrected
S.E.
R.W.D. Works Circle, Saharsa

Sd/-
12.9.24



Sd/-
12.09.24

Sl.No.	SDB SL.NO	Description	QUANTITY	Unit	RATE	AMOUNT (in Rs.)
29	9.1 / 11.1	Box culvert Foundation Earth work in excavation for foundation of structures	223.563	Cum	370.58	82,848.00
30	11.4 (I)	Providing concrete for plain/reinforced concrete in open foundations complete as per drawings and technical specifications Clause 802, 803, 1202 & 1203	15.855	Cum	7806.43	1,23,771.00
31	11.4 (II)	Providing concrete for plain/reinforced concrete in open foundations complete as per drawings and technical specifications Clause 802, 803, 1202 & 1203	66.918	Cum	7473.17	5,00,089.00
32	11.7	Supplying, fitting and placing HYSD bar reinforcement in foundation complete as per drawings and technical specifications Clauses 1000 and 1202	0.32	MT	65413.28	20,605.00
33	12.5	Plain/reinforced cement concrete in substructure complete as per drawings and technical specification Clauses 802, 804, 805, 806, 807, 1202 and 1204	32.55	Cum	8002.08	2,60,462.00
34	12.9	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full	72.00	Nos	140.32	10,103.00
35	12.5 (iv)	Plain/reinforced cement concrete in substructure complete as per drawings and technical specification Clauses 802, 804, 805, 806, 807, 1202 and 1204 RCC M-	23.10	Cum	8950.20	2,06,750.00
36	12.6	Supplying, fitting and placing HYSD bar reinforcement (Fe 415) in substructure complete as per drawings and technical specification Clauses 1002, 1005, 1010 & 1202	2.28	MT	65607.18	1,49,486.00
37	12.10	Backfilling behind abutment, wing wall and return wall complete as per drawings & technical specification Clause 1204.3.8 (With Sandy Materials)	68.57	Cum	1005.96	68,979.00
38	12.11	Providing and laying filter media with granular crushed aggregates as per specification to a thickness of not less than 600 mm with smaller size towards the soil and	39.64	Cum	3873.44	1,53,533.00
39	12.5 (II)	Plain/reinforced cement concrete in substructure complete as per drawings and technical specification Clauses 802, 804, 805, 806, 807, 1202 and 1204 (Coping - PCC M-20 Grade)	23.36	Cum	8353.92	1,95,148.00
40	13.1	Providing and laying reinforced cement concrete in superstructure as per drawing and technical specifications Clauses 800, 1205.4 and 1205.5 RCC M-	8.75	Cum	9400.45	82,254.00
41	13.2	Supplying, fitting, and placing HYSD bar reinforcement in superstructure complete as per drawing and technical specifications Clauses 1002, 1010 and 1202	0.74	MT	67026.93	49,851.00
42	13.6	Construction of R.C.C. railing of M 25 grade in cast-in-situ with 20 mm nominal size aggregate, true to line and grade, tolerance of vertical railing post not to exceed 1 in	8.00	RM	8776.56	70,212.00
43	13.10	Construction of R.C.C. railing of M 25 grade in cast-in-situ with 20 mm nominal size aggregate, true to line and grade, tolerance of vertical railing post not to exceed 1 in	8.00	Nos	1263.13	10,105.00


 Executive Engineer
 R.W.D Works Division
 Simri Bakhtiyarpur

Approved as Corrected


 S.E.
 R.W.D Works Circle, Saharsa


 12.9.24

 12.09.24

Sl. No.	SDB Sl. NO	Description	QUANTITY	Unit	RATE	AMOUNT (in Rs.)
		Construction of Parapet Wall				
44	13.9	Brick masonry work in cement mortar 1:3 in parapet excluding pointing and plastering as per drawing and technical specifications Clauses 600, 900 and 1208.4	3.12	cum	6,541.53	20,410.00
45	12.13	Providing PCC M-20 architectural coping on the top of wing wall, return wall etc. complete as per drawing and technical specification Clauses 615, 710 and 1204.3.11	13.00	m.	542.17	7,048.00
46	12.3 (i)A	Plastering with cement mortar (1:4) on brick work in sub-structure as per Technical Specifications	21.76	Sqm	260.81	5,675.00
		Dismantling of Cross Drainage Works.				
	2.5	Dismantling of existing structures like culverts, bridges, retaining walls and other structure comprising of masonry, cement concrete, wood work, steel work,				
47	(B)	Cement Concrete	0.81	cum	630.41	511.00
	2.6	Dismantling of existing structures like culverts, bridges, retaining walls and other structures comprising of brick masonry, including disposal of unserviceable material				
48	(B)	Cement mortar	30.69	cum	296.89	9,112.00
	2.7	Removing all types of Hume pipes and stacking including Earthwork and Dismantling of Masonry Works as per Technical Specification Clause 202.				
49	(B)	Above 600 mm to 900 mm dia Hume pipe	5.00	cum	325.20	1,626.00
50		(A) TOTAL COST OF CONSTRUCTION IN RS.=				90,93,473.00
51		Add Labour Cess @ 1%				90,935.00
52		Add Seigniorage Fee @ 10% on Material Cost only				1,30,936.00
53		Add GST @ 18%				16,36,826.00
54		Total Construction Cost with 18% GST, 1% L.C. & 10%				1,09,52,170.00
55		Maintenance cost of Road	20	Quarterly	15,469.35	3,09,387.00
56		(B) TOTAL COST OF MAINTENANCE IN RS. =				3,09,387.00
57		Add Labour Cess @ 1%				3,094.00
58		Add Seigniorage Fee @ 10% on Material Cost only				948.00
59		Add GST @ 18%				55,690.00
60		Total Maintenance Cost with 18% GST, 1% L.C. & 10%				3,69,119.00
61		Total Construction & Maintenance Cost with 18% GST, 1% L.C. & 10% S.F.				1,13,21,289.00

Sd/-
 6413124
 Executive Engineer
 R.W.D Works Division
 Simri Bakhtiyarpur

RS 1,13,21,289=00
 Construction Cost Rs---1,09,52,170=00
 years Maintenance Cost Rs---3,69,119=00
 total Amount of B.O.O. Rs---1,13,21,289=00

B.O.O. Approved For Rs 1,13,21,289=00 (one crore Thirteen lakh
 Twenty one Thousand Two Hundred Eighty Nine) only

Approved as Corrected

S.E.
 R.W.D. Works, Circle, Saharsa
 12.9.24
 12.09.24