

कार्यपालक अभियन्ता का कार्यालय  
ग्रामीण कार्य विभाग  
कार्य प्रमण्डल, गोपालगंज-2

पत्रांक 1157 31/9/25

दिनांक-24/09/25

प्रेषक,

कार्यपालक अभियन्ता  
ग्रामीण कार्य विभाग  
कार्य प्रमण्डल, गोपालगंज-2

सेवा में,

अपर मुख्य कार्यपालक पदाधिकारी -सह-  
सचिव,  
ब्राडा,  
बिहार, पटना।

विषय:-**नाबार्ड शीर्ष अन्तर्गत अनुरक्षण मद में आवंटन उपलब्ध कराने के संबंध में।**

महाशय,

उपर्युक्त विषयक योजनान्तर्गत कराये गये कार्य के भुगतान हेतु संलग्न मांग पत्र के अनुसार आवंटन उपलब्ध कराने की कृपा की जाए।

अनु०:- यथोक्त।


विश्वासभाजन

31/9/25  
कार्यपालक अभियन्ता  
ग्रामीण कार्य विभाग,  
कार्य प्रमण्डल, गोपालगंज-2

क्र० सं०	कार्य प्रपत्र का नाम	योजना का नाम	एकरारनामा के अनुसार प्रत्यक्षित राशि वर्षवार										व्यय की राशि वर्षवार										प्रशासनिक स्वीकृति की राशि एवं प्रसा अनुमोदित परिमाण	प्रशासनिक स्वीकृति का प्रयोजन / विनाश	कुल निर्माण कार्य करने पूर्ण करने की वास्तविक दिनांक	वर्षवार अंशोदित राशि								कुल राशि अधिप्राप्ति राशि (लाख में)
			प्रथम वर्ष राशि (लाख में)	द्वितीय वर्ष राशि (लाख में)	तृतीय वर्ष राशि (लाख में)	चतुर्थ वर्ष राशि (लाख में)	पंचम वर्ष राशि (लाख में)	कुल राशि (लाख में)	प्रथम वर्ष राशि (लाख में)	द्वितीय वर्ष राशि (लाख में)	तृतीय वर्ष राशि (लाख में)	चतुर्थ वर्ष राशि (लाख में)	पंचम वर्ष राशि (लाख में)	कुल राशि (लाख में)	प्रशासनिक स्वीकृति की राशि एवं प्रसा अनुमोदित परिमाण	प्रशासनिक स्वीकृति का प्रयोजन / विनाश	कुल निर्माण कार्य करने पूर्ण करने की वास्तविक दिनांक	प्रथम वर्ष राशि (लाख में)	द्वितीय वर्ष राशि (लाख में)	तृतीय वर्ष राशि (लाख में)	चतुर्थ वर्ष राशि (लाख में)	पंचम वर्ष राशि (लाख में)				कुल राशि (लाख में)								
																											प्रथम वर्ष राशि (लाख में)	द्वितीय वर्ष राशि (लाख में)	तृतीय वर्ष राशि (लाख में)	चतुर्थ वर्ष राशि (लाख में)	पंचम वर्ष राशि (लाख में)	कुल राशि (लाख में)	प्रशासनिक स्वीकृति की राशि एवं प्रसा अनुमोदित परिमाण	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26									
1	Copalganj-2	PMGSY Road to Shikharai Mandir Grit Tola	0.41029	0.5446	3.24739	1.90382	4.00919	10.1153	0.36143	0.52608	0	0	0	0.88751	95.03 / 4755722.10.2018	93.27509	4755722.10.2018	10.07.20	0	0	0	0	3.9479	3.90792	3.90792									

- प्रमंडलीय लेखा परीक्षिका  
ग्रामीण कार्य विभाग, कार्य प्रमंडल  
गोपालगंज-२

कार्यालयक अभिलेखा  
प्रतिलिपि कार्यालय  
कार्यालयक अभिलेखा-2  
2025

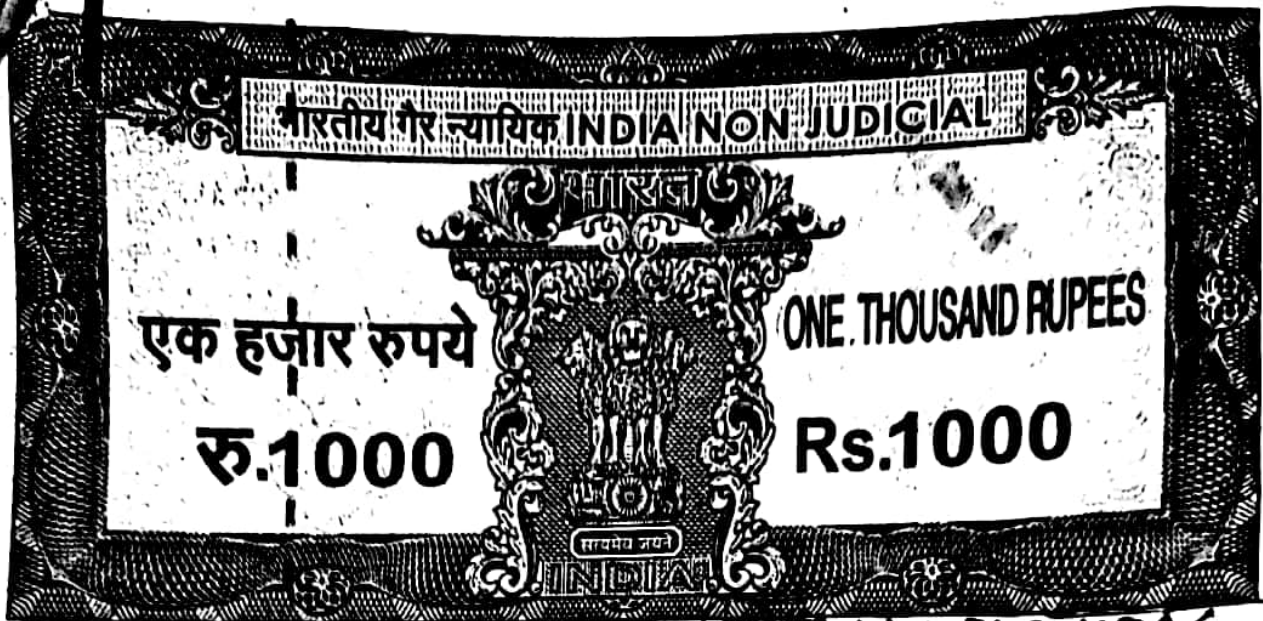

बिहार BIHAR  
मणिक प्रसाद  
पता नं. 7178  
पं. 21 पं. 21, गौरीगंज

1. Agreement No.

2. Estimated Cost Rs.

3. Agreement Amount Rs.

(i) Construction Cost Rs.

(ii) Maintenance Cost.

4. Performance Securities Rs.

A sin the shape of NSC/KVP/BG

5. Date of Commencement of Work

6. Date of Completion of Work

This agreement made the 2nd day of August 20 19

Between: Executive Engineer, RWD, Works Division Gopalganj-2 of the one part,

and M/S Binod Kumar Upadhyay, well-Bhusaw, Po -

Bhagwanpur, Dist - Gopalganj

On other part.

M/s. Binod Kumar Upadhyay  
Binod Kumar Upadhyay  
Partner

Executive Engineer  
R.W.D. W.D.  
Gopalganj-2

5/12  
02.08.19



Whereas the employer is desirous that contractor executes construction  
to PMGSY road to sinhasani mandly Giritola  
under NABARD.

and there after undertake routine maintenance for five years; and the employer has  
accepted the bid by the contractor for the execution and completion of such works and  
the remedying of any defects and routine maintenance therein at a total  
cost Rs. 89,94,761.20 (Eighty three Lac thirty four thousand  
seven hundred & sixty one) only.

Construction cost Rs. 72,89,228.00 (seventy three Lac eighty three  
thousand two hundred & twenty eight) only Five year  
maintainance cost Rs. 16,11,533.20 (Ten Lac eleven thousand  
five hundred & thirty three) only.

NOW THIS AGREEMENT WITNESSETH as follows :

1. In this agreement, words and expression shall have the same meanings as are  
respectively assigned to them in the conditions of contract hereinafter referred to  
and they shall be deemed to form and be read and construct as part of this  
agreement.
2. In consideration of the payments to be made by the Employer to the Contractor as  
hereinafter mentioned, the Contractor hereby covenants with the Employer to  
execute and complete the works and remedy any defects therein in conformity in  
all aspects with the provisions of the contract and undertaking routine  
maintenance for five years.
3. The Employer hereby covenants to pay the Contractor in consideration of the  
Execution and completion of the work and the remedying the defects wherein and  
undertaking routine maintenance for five years, the contract Price or such other  
sum as become payable under the provisions of the contract at the times and in  
the manner prescribed by the contract.
4. The following documents shall be deemed to form and be read and construct as  
part of this agreement, viz;
  - (i) Letter of Acceptance
  - (ii) Notice to proceed with the works

M/s. Binod Kumar Upadhyay  
*(Signature)*  
Partner

*(Signature)*  
Executive Engineer  
R.W.D. W.D.  
Gopalpur - 2  
51/2  
02.08.19

(iii) Contractor's Bid

(iv) Contract Data,

(v) Condition of Contract : General and Special

(vi) Additional Condition

(vii) Drawings

(viii) Bill of Quantities and

(ix) Any other documents listed in the contract Data as forming part of the Contract

In witnessed whereof the parties thereto have caused this Agreement to be executed the day and year first before written.

The Common Seal of \_\_\_\_\_  
was hereunto affixed in the presence of:

Signed, Sealed and Delivered by the said \_\_\_\_\_  
\_\_\_\_\_

In the presence of :

Binding Signature of Employer \_\_\_\_\_

Binding Signature of Contractor \_\_\_\_\_

M/s. Binod Kumar Upadhyay

Partner

Executive Engineer

N.W.D, W.D

Deopur - 2

S-1/2  
02.08.19

Mukhya Mantri Gram Sampark NABARD Yojna

Name of Work: Construction of Road CD Works of PMGSY ROAD TO BHUASANI MANDIR GRI TOLA

BILL OF QUANTITIES (BOQ) - NABARD Yojna

Length of Road : \_\_\_\_\_

L / TR No. : \_\_\_\_\_

1.46 Km District : \_\_\_\_\_

Block : \_\_\_\_\_

Geologist : \_\_\_\_\_

Surveyor : \_\_\_\_\_

(This BOQ template must not be modified/replaced by the bidder and the same should be uploaded after filling the relevant columns, else the bidder is liable to be rejected for this tender. Bidders are allowed to enter the Bidder Name and Values only)

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate	AMOUNT Rs. p
				Figure	
1.00	Reference Pillar Reference Pillar as per Standard Data Book @ 4 per Km	6.00	No.	2023.23	12139.38
2.00	Clearing and grubbing road land including uprooting wild vegetation, grass, bushes, shrubs, saplings and trees of girth upto 300 mm, removal of stumps of such trees cut earlier and disposal of unserviceable materials and stacking of serviceable material to be used or auctioned, upto a lead of 1000 m including removal and disposal of top organic soil not exceeding 150 mm in thickness as per Technical Specification Clause 201.	0.88	Ha	50148.82	28083.23
3.00	Construction of Embankment with Material Obtained from Roadway Cutting Construction of embankment with approved materials deposited at site from roadway cutting and excavation from drain and foundation of other structures graded and compacted to meet requirement of Tables 300.1 and 300.2 as per Technical Specification Clause 301.5	503.15	Cum	42.82	21363.30
4.00	Construction of Embankment with Material Obtained from Pits Construction of embankment with approved material obtained from borrow pits with a lift upto 1.5 m, transporting to site, spreading, grading to required slope and compacting to meet requirement of Tables 300.1 and 300.2 with a lead upto 1000 m as per Technical specification 301.5	2238.87	Cum	149.25	334143.33
5.00	Excavation in cutting Soil by manual means with lead upto 50 m Excavation for road work in soil with hydraulic excavator of 0.9 cum bucket capacity including cutting and loading in tippers, trimming bottom and side slopes in accordance with requirements of lines, grades and cross sections and transporting to the embankment location with a lift upto 1.5 m and lead upto 1000 m as per technical specification clause 302.3	702.09	Cum	123.76	86888.97

M/s. Binod Kumar Upadhyay  
Binod Kumar Upadhyay  
Partner

Signature of Tenderer with seal

Superintending Engineer  
RWD Works Circle, Swan

Executive Engineer  
R.W.D. W.D  
Gopalganj - 2  
02-08-19



Name of Work: Construction of Road CD Works of PMGSY ROAD TO SINHASANI MANDIR GIRI TOLA

## BILL OF QUANTITIES (BOQ) - NABARD Yojna

Length of Road : 1.49 Km District : Gopalganj  
L / TR No. : 8 Block : Sahunhour

## SCHEDULE OF WORKS

(This BOQ template must not be modified/replaced by the bidder and the same should be uploaded after filling the relevant columns, else the bidder is liable to be rejected for this tender. Bidders are allowed to enter the Bidder Name and Values only)

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate	AMOUNT Rs. P
				Figure	
6.00	Excavation in cutting Soil by manual means with lead upto 50 m Excavation for road work in soil with hydraulic excavator of 0.9 cum bucket capacity including cutting and loading in tippers, trimming bottom and side slopes in accordance with requirements of lines, grades and cross sections and transporting to the embankment location with a lift upto 1.5 m and lead upto 1000 m as per technical specification clause 302.3	136.60	Cum	77.70	10606.78
7.00	Construction of Embankment subgrade & earthen shoulders with Material Obtained from Borrow Pits Construction of subgrade and earthen shoulders with approved material (Granular material having CBR more than 7) obtained from borrow pits with all lifts and leads, transporting to site, spreading, grading to required slope and compacted to meet requirement of Table 300.2 as per Technical Specification Clause 303.1.	1271.68	Cum	154.02	195894.98
8.00	Granular Sub-base with Well Graded Material (Table 400.1)	589.05	Cum.	3440.18	2026437.31
	(ii) For Grading I Material	401.63	Cum.	4736.20	1902175.68
9.00	WBM Grading 3 using Stone Screenings Type-A 13.2mm for Gr-3 Providing, laying, spreading and compacting stone aggregates of specific sizes to water bound macadam specification including spreading in uniform thickness, hand packing, rolling with three wheel 80-100 kN static roller in stages to proper grade and camber, applying and brooming, stone screening to fill-up the interstices of coarse				
	Brick edge soling (Hard Shoulder) Laying brick soling layer on prepared sub-grade with brick on end edging according to lines, graded and cross-section shown on the drawing filling joints with sand and earth, spreading 25 mm thick layer of earth over brick soling, watering and rolling the same with three wheel road roller 80-100 kN as per Technical Specification Clause 412	262.50	Sqm	480.40	126105.10
	For CC Road Portion				

M/s. Binod Kumar Upadhyay  
Binod Kumar Upadhyay  
Partner

Signature of Tenderer with seal

Superintending Engineer  
RWD Works Circle, Siwan

Executive Engineer  
R.W.D. W.D  
Gopalganj - 2  
5/12/02.08.17

Name of Work: Construction of Road CD Works of PMGSY ROAD TO BINHABAM MANDIR GIRI TOLA

## BILL OF QUANTITIES (BOQ) - NABARD Yojna

Length of Road :

1.48 Km

Contract

Geostone

L / TR No. :

0

Block

Suburb

## SCHEDULE OF WORKS

(This BOQ template must not be modified/replaced by the bidder and the same should be uploaded after filling the relevant columns, else the bidder is liable to be rejected for this tender. Bidders are allowed to enter the Bidder Name and Values only)

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate	AMOUNT Rs. P
				Figure	
10.00	Prime Coat Providing and applying primer coat with bitumen emulsion (SS-1) on prepared surface of granular base including cleaning of road surface and spraying primer at the rate of 0.70-1.0 kg/sqm using mechanical means as per Technical Specification Clause 502 (Low porosity)	4018.28	Sqm	48.02	192963.00
11.00	PROVIDING SEAL COAT TYPE B Providing and laying seal coat sealing the voids in a bituminous surface laid to the specified levels, grade and cross fall using Type A, Type B and Type C as per Technical Specification Clause 510. By Manual Means Bitumen (S-90)	4018.25	Sqm	238.57	958106.75
12.00	CC Pavement Cement Concrete Pavement. Construction of unreinforced, dowel jointed at expansion and construction joint only, plain cement concrete pavement, thickness as per design, over a prepared sub base, with 43 grade cement or any other type as per Clause 1501.2.2 M30 (Grade), coarse and fine aggregates conforming to IS:383, maximum size of coarse aggregate not exceeding 25 mm, mixed in a concrete mixer of not less than 0.2 cum capacity and appropriate weigh batcher using approved mix design, laid in approved fixed side formwork ( steel channel, laying and fixing of 125 micron thick polythene film, wedges, steel plates including levelling the formwork as per drawing), spreading the concrete with shovels, rakes, compacted using needle, screed and plate vibrators and finished in continuous operation including provision of contraction and expansion, construction joints, applying debonding strips, primer, sealant, dowel bars, near approaches to bridge/culvert and construction joints, admixtures as approved, curing of concrete slabs for 14-days.	210.00	Cum	7761.50	1629915.92
13.00	Printing New Letters and Figures of any Shade Printing new letter and figures of any shade with synthetic enamel paint black or any other approved colour to give an even shade as per drawings and Technical Specification Clause 1701. (Hindi Matras commas and the like not to be measured and paid for. Half letters shall be counted as half only)	1540.00	height per	0.85	1303.00

M/s. Binod Kumar Upadhyay  
Binod Kumar Upadhyay

Signature of Tenderer with seal

Superintending Engineer  
RWD Works Circle, Siwan

Executive Engineer  
R.W.D. W.D.  
Gopalganj - 2

Sd/-  
22.03.17

Authorised Signatory



**BILL OF QUANTITIES (BOQ) - NABARD Yojna**

Length of Road : 1.40 Km District : Constant  
 JTR No. : 0 Block : Bhatnagar

**SCHEDULE OF WORKS**

(This BOQ template must not be modified/replaced by the bidder and the same should be uploaded after filling the relevant columns, else the bidder is liable to be rejected for this tender. Bidders are allowed to enter the Bidder Name and Values only)

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate	AMOUNT Rs. P
				Figure	
14.00	Cautionary, mandatory, Informatory, direction and place identification signs Providing and fixing of retro-reflectors cautionary, mandatory and informatory sign as per IRC:67 made of encapsulated lens type reflective sheeting vide Clause 1701.2.3, fixed over aluminium sheeting, 1.5 mm thick supported on RCC Post 100 mm x 100 mm firmly fixed to the ground by means of properly designed foundation with M15 grade cement concrete 450 mm x 450 mm x 600 mm, 600 mm below ground level as per approved drawing Clause 1701 (600 mm circular)	18.00	Each	4560.50	81910.70
15.00	Providing and fixing of typical PMGSY Informatory sign board with Logo as per MORD specifications and drawing. Three MS Plates of 1.6 mm thick, top and middle plate duly welded with MS flat iron 25mm x 5m size on back on edges. The lower plate will be welded with MS angle iron frame of 25mm x 25mm x 5mm. The angle iron frame of the lower most plate and flat iron frame of middle plate will be welded to 2 nos. 75mm x 75 mm of 12 SWG sheet tubes posts duly embedded in cement concrete M-15 grade blocks of 450mm x 450mm x 600mm, 600mm below ground level. The top most diamond plate will be welded to middle plate by 47mm x 47mm of 12 SWG steel plate tube. All M.S. will be stove enameled on both sides. Lettering and printing arrows, border etc. will be painted with ready mixed synthetic enamel paint of superior quality in required shade and colour. All sections of framed posts and steel tube will be painted with primer and two coats of epoxy paint as per drawing Clause 1701 and Annexure 1700.1	4.00	Each	11540.48	46161.93
16.00	Road Marking with Hot Applied Thermoplastic Compound with Reflectors/Glass Beads on Bituminous Surface Providing and laying of hot applied thermoplastic compound 2.5 mm thick including reflectors/glass beads @ 250 gms per sqm area, thickness of 2.5 mm is exclusive of surface applied glass beads as per IRC:35. The finished surface to be level, uniform and free from streaks and holes.	210.00	Sqm	867.77	182230.77
17.00	Kilometer Stone Reinforced cement concrete M15 grade				

Signature of Tenderer with seal

Bhaskar Kumar Upadhyay

Superintending Engineer

CHAND MANI CHAND

Executive Engineer

R.W.D. W.D

Gopalgarh - 2

5-1/2  
02-09-19

Work: Construction of Road CD Works of PMGSY ROAD TO SHIVASANI MANDIR GIRI TOLA

Bill of Quantities (BOQ) - NABARD Yojna

Length of Road :

1/11 No.

1.48 Km

District

Block

Geoplot

Schedule

(This BOQ template must not be modified/replaced by the bidder and the same should be uploaded after filling the relevant columns, else the bidder is liable to be rejected for this tender. Bidders are allowed to enter the Bidder Name and Values only)

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate	AMOUNT Rs. P
				Figure	
	5th Kilometre Stone (precast)	70.00	Each	982.62	67363.14
	Ordinary Kilometer Stone (Precast)	2.00	Each	2821.01	5642.02
	200 m stone (precast)	6.00	Each	739.84	4437.87
18.00	Boundary Pillars Reinforced cement concrete M15 grade boundary pillars/local stone of standard design as per IRC:25, fixed in position including finishing and lettering but excluding painting as per drawing and Technical Specification Clause 1704	12.00	Each	566.98	6719.93
19.00	11.1 Earthwork in excavation for structures as per drawing and technical specifications Clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious material and disposal upto a lead of 50 m, dressing of sides and bottom and backfilling in trenches with excavated suitable material.. Up to 3.0 m Below GL	19.35	Cum	264.02	5108.71
20.00	11.4 Providing concrete for plain/reinforced concrete in open foundations complete as per drawings and technical specifications Clause 802, 803, 1202 & 1203 (I) P.C.C grade M 10 (Nominal mix 1:3:6)	2.95	Cum	7214.47	21304.33
21.00	Plain/reinforced cement concrete in substructure complete as per drawings and technical specification Clauses 802, 804, 805, 806, 807, 1202 and 1204. (I) P.C.C grade M 15 For nominal mix 1:2.5:5	17.44	Cum	7307.77	127447.47
22.00	Providing and laying reinforced cement concrete pipe NP3 for culverts on first class bedding of granular material in single row including fixing collar with cement mortar 1:2 but excluding excavation, protection works, backfilling, concrete and masonry works in head walls and parapets Clause 1106. 600 mm Dia	7.50	Rm	1187.69	8907.70
23.00	Laying (First Class) bedding on well compacted sand, moorum or approved granular material as per Clause 1105 (ii)	3.49	Cum	265.54	925.93
	Environmental Cost	2.00	No.	57634.86	115269.72
24.00	1st Year Maintenance Cost	1.40	Km	32563.17	45588.44
25.00	2nd Year Maintenance Cost	1.40	Km	43222.02	60510.83

Signature of Tenderer with seal

M. Binod Kumar Upadhyay

Superintending Engineer

Executive Engineer  
R.W.D. W.D  
Geoplot - 2

S/12  
02-08-17



**Mukhya Mantri Gram Sampark NABARD Yojna**

**Name of Work: Construction of Road in Works of PMGSY ROAD TO BINIABANI MANHAR DIN YOLA**

**NAME OF QUANTITIES (MCM): NABARD Yojna**

**Length of Road: 1.40 Km** **Width: 4.5m** **Depth: 0.15m**

**SCHEDULE OF WORKS**

(This BOQ template must not be modified/replaced by the bidder and the same should be uploaded after filling the relevant columns, else the bidder is liable to be rejected for this tender. Bidders are allowed to enter the Bidder Name and Values only)

Sl. No.	Description of work	No. of Qty.	Unit	Estimated Rate	AMOUNT
				Figures	
26.00	3rd Year Maintenance Cost	1.40	Km	867730.61	1214822.85
27.00	4th Year Maintenance Cost	1.40	Km	161097.46	225536.44
28.00	5th Year Maintenance Cost	1.40	Km	818185.18	1145459.25
<b>Total Estimated Cost in Figures</b>					<b>6327608.67</b>
<b>Quoted Amount</b>					<b>6327609.00</b>

B.O.Q Approved for Rs 9327507.00 (Ninety Three Lacs Twenty Seven Thousand Five Hundred and Nine) Rupees only. Thang Serial No 1 A 28

*[Signature]*  
24/1/18

*[Signature]*  
24/1/2018  
Superintending Engineer  
RVD Works Circle, Shwan

Binod Kumar Upadhyay  
*[Signature]*

Signature of Tenderer with seal

*[Signature]*  
Executive Engineer  
R.V.D. W.D  
Durgam - 2  
5-1/2  
02.08.19