

कार्यपालक अभियंता का कार्यालय,
ग्रामीण कार्य विभाग, कार्य प्रमंडल,
मुजफ्फरपुर पूर्वी-1

पत्रांक...1179

दिनांक...13/7/2024

प्रेषक,

कार्यपालक अभियंता,
ग्रामीण कार्य विभाग, कार्य प्रमंडल,
मुजफ्फरपुर पूर्वी-1

सेवा में,

अपर मुख्य कार्यपालक पदाधिकारी-सह-सचिव
बिहार ग्रामीण पथ विकास अभिकरण,
बिहार पटना।

विषय:- शीर्ष नाबार्ड अंतर्गत वित्तीय वर्ष 2024-25 में अनुरक्षण मद में व्यय हेतु आवंटन की मांग।

महाशय,

उपर्युक्त विषय प्रासंगिक पत्र के संबंध में शीर्ष नाबार्ड अंतर्गत वित्तीय वर्ष 2024-25 में अनुरक्षण मद में व्यय हेतु संलग्न विवरणी के अनुसार 8.06181 (आठ लाख छह हजार एक सौ एकासी) रुपये का आवंटन उपलब्ध कराने की कृपा की जाये ताकि किये गये कार्यों का भुगतान किया जा सके।

अनुलग्नक:-यथोक्त

विश्वासभाजन


कार्यपालक अभियंता
ग्रामीण कार्य विभाग, कार्य प्रमंडल,
मुजफ्फरपुर पूर्वी-1
13/07/24

FORM GFR 19-A

(See Government of India's Decision (I) below Rule-150)

Form of Utilizations Certificate upto the month upto June 2024

Sl. No.	Name of Scheme	Sanction No. & Date with Amount (in lacs Rs.)	Amount Received (in lacs Rs.)	Particulars
1	2	3	4	5
1	Construction of Rural Roads under Nabard (Maintenance)	BRRDA Patna vide letter no.	0.00	Certified that out of Rs. 0.00 lacs of grants -in-aid sanctioned during the years 2023-24 in favors of E.E., R.W.D.(W) Division Muzaffarpur East-1 Bihar a sum of Rs.0.00 has been utilized for the purpose of Nabard (Maintenance) Schemes as given in the margin for which it was sanctioned and that the balance of Rs. 0.00 remaining unutilized at the end of the period under report.
	Total		0.00	

2. Certified that I have satisfied myself that the conditions on which the grant-in-aid was sanctioned have been duly fulfilled/are being fulfilled and that I have exercised the following checks to see that the money was actually utilized for the purpose for which it was sanctioned.

Kind of Checks exercised:-

- Works have been supervised by Executive engineer/Superintending Engineer.
- Periodical inspection has been conducted by Executive Engineer/Superintending Engineer.
- Construction materials have been tested.
- Measurements have been recorded in the MBs and test check conducted by the Assistant Engineer/Executive Engineer.
- All other codal formalities have been observed.

3. Physical Progress achieved:-

- Construction of Road Works.
- Construction CD Works.

D.A.O.

R.W.D. Works Division
Muzaffarpur East-1

Executive Engineer**R.W.D. Works Division****Muzaffarpur East-1**

13/07/24

राज्य योजना (नाबार्ड) अंतर्गत पथों में पंचवर्षीय अनुरक्षण अधियाचना प्रपत्र

क्र० सं०	कार्य प्रमंडल का नाम	योजना का नाम	एकरचना के अनुसार प्रावधानित राशि वर्षवार					कुल राशि (लाख में)	व्यय की राशि वर्षवार					कुल राशि (लाख में)	प्रशासनिक स्वीकृति की राशि एवं प्रस्तावित पत्रांक (लाख में)	पंचवर्षीय अनुरक्षण की राशि सहित अनुमोदित परिमाण विपत्र की राशि (लाख में)	अनुरक्षण हेतु प्रशासनिक स्वीकृति का पत्रांक/दिनांक	मूल निर्माण कार्य करने की वास्तविक तिथि	वर्तमान अधियाचित राशि					कुल अधियाचित राशि (लाख में)
			प्रथम वर्ष राशि (लाख में)	द्वितीय वर्ष राशि (लाख में)	तृतीय वर्ष राशि (लाख में)	चतुर्थ वर्ष राशि (लाख में)	पंचम वर्ष राशि (लाख में)		प्रथम वर्ष राशि (लाख में)	द्वितीय वर्ष राशि (लाख में)	तृतीय वर्ष राशि (लाख में)	चतुर्थ वर्ष राशि (लाख में)	पंचम वर्ष राशि (लाख में)						प्रथम वर्ष राशि (लाख में)	द्वितीय वर्ष राशि (लाख में)	तृतीय वर्ष राशि (लाख में)	चतुर्थ वर्ष राशि (लाख में)	पंचम वर्ष राशि (लाख में)	
1	Muzaffarpur East-1	PATSARA DHOBIA TOLA SAMUDAIYK BHAWAN to BAUNATHIPUR	0.91319	1.07118	2.46677	3.03181	3.62319	11.10614	0.00000	0.00000	0.00000	3.02918	0.00000	3.02918	Lt.No 5761 Dt.05.05.2017 170.38 Lakh	173.59467	Lt.No 5761 Dt.05.05.2017	15.06.2018	0.90932	1.06788	2.46144	3.62317	8.06181	8.06181

- 1 कार्य विवरणों के अनुरूप पूर्ण कर लिया गया है।
- 2 पथ में MQU/PM/IE से संबंधित कोई सुधार प्रतिवेदन लंबित नहीं है।
- 3 अनुमोदित परिमाण विपत्र की कुल राशि प्रशासनिक स्वीकृति की राशि से 20% अधिकतम सीमा के भीतर है साथ ही अनुमोदित परिमाण विपत्र के मर्दों का विस्तार का विफलन भी 20% से ज्यादा नहीं है।
- 4 अनुदानक - प्रशासनिक स्वीकृति का पत्र, अनुमोदित परिमाण विपत्र एवं एकरचना की अभिप्रायित प्रति।


 कार्यपालक अभियंता,
 ग्रामीण कार्य विभाग, कार्य प्रमंडल,
 मुजफ्फरपुर पूर्वी-1
 13/07/2024

बिहार सरकार
ग्रामीण कार्य विभाग

पत्रांक - मु0 अ0-4 (मु0)-नाबार्ड-03-39/2017

/पटना, दिनांक-

प्रेषक,

संजय कुमार, भा0प्र0से0

अपर सचिव।

सेवा में,
महालेखाकार, बिहार
वीरचन्द पटेल पथ, पटना।
विषय:- योजना शीर्ष 4515-अन्य ग्राम विकास कार्यक्रमों पर पूंजीगत परिव्यय-103-ग्राम विकास-राज्य
योजना-0105-ग्राम विकास की परियोजनाएं (नाबार्ड ऋण संपोषित योजना)-उपशीर्ष के अन्तर्गत बिहार राज्य के विभिन्न
जिलों में (परिशिष्ट-1 के रूप में संलग्न सूची के अनुरूप) कुल 67 पथ निर्माण योजनाओं पर पथवार प्रशासनिक स्वीकृति
प्रदान करने के संबंध में।
महाशय,

निदेशानुसार योजना शीर्ष 4515-अन्य ग्राम विकास कार्यक्रमों पर पूंजीगत परिव्यय-103-ग्राम
विकास-राज्य योजना-उप शीर्ष-0105-ग्राम विकास की परियोजनाएं (नाबार्ड ऋण संपोषित योजना)-उप शीर्ष के
अन्तर्गत बिहार राज्य के विभिन्न जिलों में (परिशिष्ट-1 के रूप में संलग्न सूची के अनुरूप) कुल 67 पथ निर्माण
योजनाओं जिसकी लम्बाई 84.766 कि0मी0 एवं राशि रु0 53.3065967 करोड़ (तिरपन करोड़ तीस लाख पैसठ हजार नौ
सौ सड़सठ रु0 मात्र) है-हेतु पथवार प्रशासनिक स्वीकृति प्रदान की जाती है।

परिशिष्ट-1

नाबार्ड संपोषित योजना अन्तर्गत वित्तीय वर्ष 2017-18 के लिए प्रशासनिक अनुमोदित योजनाओं की सूची :-								
SL No.	District	Works Division	Block	MMGSY CNCPL NO.	Name of Road	Length (K.M)	TA Amount (In Lacs)	Amount Lac/K.M
1	2	3	4	5	6	7	8	9
1	Patna	Patna	Fatuha	S038	Saidpur Chandasi Path to Yamanpura	0.555	38.482	69.3369369
2	Patna	Patna	Khushrupur	S04	NH-30 se 100m Aage (Nagarnausa Taraf) to Harijan Tola	0.515	36.039	69.9786408
3	Patna	Patna	Daniyawar	S06	NH-30A Jodhan Bigha	0.525	34.848	66.3771429
4	Patna	Danapur	Maner	S030	Maner-Haldichapra Road to Dhajawa tola	1.00	69.86850	69.8685
5	Patna	Danapur	Bihta	S042	Bihta Bikram Road to Kanchanpur Yadav Tola	1.10	68.48430	62.2584545
6	Patna	Masaurhi	Punpun	S03	Pothi Bripur Path to Parthu main Road Mahadalit tola.	1.00	59.90840	59.9084
7	Patna	Masaurhi	Masaurhi	S033	Nadaul Bhagwanganj Path to Nadauna.	0.35	20.92597	59.7884857
8	Patna	Masaurhi	Dhanarua	S024	Sewai Mode to Tadwan	2.10	127.44	60.6857143
9	Patna	Paliganj	Naubatpur	S020	Bari Tairaila to Bedulli	1.06	65.80	62.0754717
10	Patna	Paliganj	Dulhin Bazar	S016	Pali Masaurhi Road to Shihi Takiya (Nawada)	1.10	61.53	55.9363636
11	Patna	Paliganj	Naubatpur	S014	Gonwan Paltu Chhitani Road to Navadinan	0.55	30.90	56.1818182
12	Patna	Paliganj	Bikram	S026	Tiluchak Sundarnur road to Taripur	0.3	22.80250	76.008
13	Lakhisarai	Lakhisarai	Chanan	S024	PMGSY Malya to South Manjhi tola Malya	0.720	40.774	56.6305556

SL No.	District	Works Division	Block	MMGSY CNCPL No.	Name of Road	Length (K.M)	TA Amount (In Lacs)	Amount Lac/K.M
1	2	3	4	5	6	7	8	9
14	Lakhisarai	Lakhisarai	Lakhisarai	S013	T012 ODR to Saarobaro Harijan Tola	1.125	68.519	60.9057778
15	Lakhisarai	Lakhisarai	Ramgarh Chowk	S015	L033 to Ramnagar	0.790	46.503	58.864557
16	Lakhisarai	Lakhisarai	Suryagarha	S031	L049 Sahur to Jagira	0.620	39.752	64.116129
17	Lakhisarai	Lakhisarai	Halsi	S011	Sethna Salaunza Nahar Road to Baajitpur.	1.610	78.99	49.0621118
18	Lakhisarai	Lakhisarai	Pipariya	S01	Middle School Diyara Pipariya to Karari Pipariya.	1.865	135.95	72.895442
19	Lakhisarai	Lakhisarai	Ramgarh Chowk	S02	L056 to Bhamariya Manjhi Tola	1.600	93.44	58.40
20	Katihar	Katihar	Hasanganj	S01	Madarsa Chowk to Bagghabari	1.05	67.296	64.0914286
21	Katihar	Katihar	Hasanganj	S012	T01 to Naga Tola	0.575	38.608	67.1443478
22	Sheikhpura	Sheikhpura	Barbigha	S005	Barbugha Toy path Terapur more to Saraiya.	0.936	56.075	59.909188
23	Sheikhpura	Sheikhpura	Chewara	S038	Ekray Path to Kemra Mushari	0.745	48.460	65.0469799
24	Sheikhpura	Sheikhpura	Sheikhpura	S010	Mehus Chimani par to Maniauri via Nawada	0.730	43.348	59.3808219
25	Supaul	Triveniganj	Triveniganj	S129	PWD Parsahi sadak Kuwar Yadav ke ghar to Parsahi Mohan Yadav Tola tak.	0.846	60.76	71.820331
26	Chapra	Chapra-2	Jalalpur	S016	Bangra to Bangra -4.	1.195	68.715	57.5020921
27	Chapra	Chapra-2	Jalalpur	S054	Dhenki to Devbariya tak.	0.500	28.174	56.348
28	Chapra	Chapra-2	Lahladpur	S049	Purusetampur Sonia PMGSY Kishanpur Lauaar Panchayat Bhawan se Bhatbaliya khas.	0.515	39.073	75.8699029
29	Chapra	Chapra-1	Garkha	S057	Dhanaura High School to Dhanaura Jaggu Singh ke ghar tak.	0.39	31.015	79.525641
30	Chapra	Chapra-1	Sadar Chapra	S036	Middle School Fakuli to Umdha.	1.055	58.328	55.2872038
31	Chapra	Chapra-1	Sadar Chapra	S019	Mathiya Gramin Sadak to Hasanpurva Chhat Talab tak.	0.700	44.519	63.5985714
32	Chapra	Madhaura	Amnaur	S062	Raipura Mura PMGSY Path to Hakama Paschim Tola.	0.57	68.439	70.5556701
33	Chapra	Madhaura	Taraiya	S034	Yakuchak Pachraur PMGSY to Pokhara tak	0.605	25.623	42.3520661
34	Chapra	Madhaura	Panapur	S036	Ubhawa Bhola Pandey ke ghar to Masjid tak	0.445	29.037	65.2516854
35	Chapra	Madhaura	Panapur	S030	Totha PMGSY to Simari Pakki Sadak.	0.999	62.17	62.2322322
36	Chapra	Sonpur	Maker	S18	Maker-Mahesh Chapra PMGSY to Purshotimpur Bazar	1.595	104.87	65.7492163

Sl No.	District	Works Division	Block	MMGSY CNCPL No.	Name of Road	Length (K.M)	TA Amount (In Lacs)	Amount Lac/K.M
1	2	3	4	5	6	7	8	9
37	Chapra	Sonpur	Maker	S001	Bishunpura Piprahi PMGSY Sadak to Gandak Nahar	3.375	194.45	57.6148148
38	Chapra	Sonpur	Dariyapur	S04	Khajauli PMGSY path se Ghanechapra gram in path tak.	1.845	120.12	65.1056911
39	Chapra	Chapra-1	Nagra	S011	Chapra-Masrakh PWD Road (Yogendra Singh ke Ghar) to Afaur Purab Tola.	2.040	110.32	54.0784314
40	Chapra	Chapra-1	Nagra	S015	T05 Sargatti PMGSY to takiya.	1.685	98.30	58.3382789
41	Chapra	Chapra-2	Baniyapur	S039	Dhobwal Sekhpura PMGSY se Gowa Piparpatti Nagdevi Tola hote	1.950	114.43	58.6820513
42	Chapra	Chapra-2	Baniyapur	S054	Harpur Karah PMGSY se Ram Tola tak	1.690	108.43	64.1597633
43	Chapra	Chapra-2	Lahaladpur	S024	Ekma Masrakh PMGSY Sansa Transfermer ke pass se Shambhu Chapra Khas tak	1.805	103.22	57.1855956
44	Chapra	Madhaura	Amnaur	S043	Salkhua Marhaura PMGSY Path to Parsa Bhatti PMGSY Road.	2.890	179.18	62.00
45	Chapra	Madhaura	Masrakh	S070	Nirsu dhala Pakki sadak to 40 RD Nahar Pul tak.	3.250	203.10	62.4923077
46	Chapra	Madhaura	Madhaura	S016	Silauri Paharpur PMGSY Path to Mathiya tak	2.550	134.16	52.6117647
47	Chapra	Madhaura	Masrakh	S021	Masrakh Sahajitpur road to Sankauli PCC.	2.095	140.89	67.2505967
48	Chapra	Madhaura	Taraiya	S02	Bhataura Primary School to Bhataura Devi Asthan.	1.415	91.98	65.0035336
49	Muzaffarpur	Muzaffarpur East-1	Bandra	S031	Patsara dhobi tola samudaiy bhawan to Baijnathpur.	2.490	170.38	68.4257028
50	Muzaffarpur	Muzaffarpur East-1	Kurhani	S06	PMGSY (Kharauna Dih) to Harijan Dalit Basti	0.850	54.30	63.8788235
51	Muzaffarpur	Muzaffarpur East-1	Bandra	S032	Karmaith Kewatsa path to Marha tola	0.650	46.74	71.9076923
52	Muzaffarpur	Muzaffarpur East-1	Kurhani	S05	MMGSY (Paltan Chaudhary ke Ghar) to Jairam Tola (Kharauna Dih)	0.57	45.70	80.1754386
53	Muzaffarpur	Muzaffarpur East-1	Sakra	S030	PMGSY Rasulpur Maniyari to Muslim Tola.	1.125	80.14	71.2355556
54	Muzaffarpur	Muzaffarpur East-1	Sakra	S051	Karja Jaitpur road Nawada kedar misra ke ghar to Repura muslim tola tak.	1.787	109.12	61.2345679
55	Muzaffarpur	Muzaffarpur East-1	Saraiya	S098	Nargi Jivnath PMGSY road to Govindpur se Khaira road tak.	2.207	129.410	58.6361577

Sl. No.	District	Works Division	Block	MMGSY CNCFL No.	Name of Road	Length (K.M)	TA Amount (In Lacs)	Amount Lac/K.M
1	2	3	4	5	6	7	8	9
56	Muzaffarpur	Muzaffarpur East-1	Sakra	S033	Middle school Majhauria to Satpura muraul block siman tak.	2.260	154.860	68.5221239
57	Muzaffarpur	Muzaffarpur East-1	Musahari	S046	SH102 Ramesh Thakur ke Dalan to Patahi Jagannath Late Kalyan Thakur ke ghar tak	1.00	76.04	76.04
58	Begusarai	Teghara	Bachhwara	S029	Tara to Maranchi	0.51	35.86	70.3137255
59	Samastipur	Samastipur	Samastipur	S026	L073 Chaknoor to Sahni Tola	0.700	47.63	68.0428571
60	Begusarai	Teghara	Bhagwanpur	S049	S048 Mahadalit tola to Larwapur Bandh via house of Munna Mahto (Telan)	1.340	92.57	69.0820896
61	Begusarai	Teghara	Bhagwanpur	S048	Naula pul to Kharmooli via Jokia Bandh, Khakhara Gusha	4.105	249.01	60.6601705
62	Madhubani	Fulparas	Khutauna	S060	Malik Arjun Thakur Ghar to Kolhatta	1.901	133.73	70.3471857
63	Siwan	Siwan-1	Hasanpura	S021	Arjal Bazar to Mandrauli Mauja Bhediari Tola	1.000	65.736	65.736
64	Siwan	Siwan-1	Siswan	S026	Naya Gao PWD Road to Chhotaki Nawada via Badaki Nawada	0.500	33.568	67.136
65	Siwan	Siwan-1	Siwan	S02	Siwan Lakadi Path ke Orma Uttar Tola Kothi to Bindusar Hamid	1.050	69.866	66.5390476
66	Siwan	Siwan-1	Siswan	S05	Siswan Chapra CMDG Road to Tolapur	0.800	54.443	68.05375
67	Siwan	Siwan-1	Hasanpura	S027	Laheji Bazar to Mandrauli	1.000	67.513	67.513
Total						84.766	5330.65967	

2. इस योजना को दो वित्तीय वर्ष 2017-18 एवं 2018-19 में पूरा किये जाने का लक्ष्य है।
3. कार्यपालक अभियंता, ग्रामीण कार्य विभाग, संबंधित कार्य प्रमंडल, योजना की विस्तृत कार्य योजना तैयार करेंगे तथा उसके अनुरूप कार्यों को समयबद्ध ढंग से पूर्ण कराना सुनिश्चित करेंगे।
4. कार्यपालक अभियंता, संबंधित कार्य प्रमंडल सुनिश्चित करेंगे कि स्वीकृत पथ किसी अन्य योजना के अन्तर्गत सम्मिलित नहीं है।
5. कार्यपालक अभियंता, संबंधित कार्य प्रमंडल, योजना के कार्य सम्पादन हेतु निकासी एवं व्ययन पदाधिकारी होंगे।
6. कार्य ई-निविदा के माध्यम से Standard Bidding Document के आधार पर कराया जायेगा।
7. कार्यों की गुणवत्ता सुनिश्चित करने की जिम्मेवारी संबंधित कार्यपालक अभियंता की होगी; किये गये कार्यों का भुगतान गुणवत्ता के जाँचफल के गुण-दोष के आधार पर किया जायेगा।
8. योजना के क्रियान्वयन से पूर्व इस पर सक्षम पदाधिकारी से प्रावैधिक स्वीकृति प्राप्त कर ली जायेगी। प्रावैधिक स्वीकृति के समय सभी सक्षम प्राधिकार IRC SP-72 वर्ष 2015 एवं IRC SP-62 वर्ष 2014 के तकनीकी प्रावधानों का अक्षरशः अनुपालन सुनिश्चित करेंगे।
9. इस योजना का व्यय योजना शीर्ष 4515-अन्य ग्राम विकास कार्यक्रमों पर पूँजीगत परिव्यय-103-ग्राम विकास-राज्य योजना-0105-ग्राम विकास की परियोजनाएं (नाबार्ड ऋण संपोषित योजना)-उपशीर्ष निम्नका निम्न कोड P-4515001030105 एवं स्कीम कोड-5369 के अन्तर्गत वित्तीय वर्ष 2017-18 में उपबंधित राशि से विकलनीय होगा।
10. योजना शीर्ष 4515-अन्य ग्राम विकास कार्यक्रमों पर पूँजीगत परिव्यय-103-ग्राम विकास-राज्य योजना-0105-ग्राम विकास की परियोजनाएं (नाबार्ड ऋण संपोषित योजना)-उपशीर्ष के अन्तर्गत वित्तीय वर्ष 2017-18 में 454.31 लाख रुपये का बजट उपबंध स्वीकृत है।

11. कार्यपालक अभियंता, ग्रामीण कार्य विभाग, संबंधित कार्य प्रमंडल, द्वारा योजना का भौतिक एवं वित्तीय प्रगति प्रतिवेदन प्रत्येक माह के 10 तारीख तक निश्चित रूप से कक्षा संबंधित अभियंता एवं संबंधित मुख्य अभियंता, पटना के माध्यम से विभाग को संप्रदाय कराया जायेगा।

12. इन योजनाओं का निर्माण नाबार्ड के तहत कराये जाने के प्रस्ताव पर मृग मुखर्जी महोदय, बिहार सरकार का अनुमोदन प्राप्त है।

13. इन पंचायत योजनाओं के प्रशासनिक स्वीकृति के प्रस्ताव पर सचिका सं- मु 30-4 (मु) नाबार्ड-03-39/2017 के मु सं-12/टि 07.04.17 को अनुमोदन प्राप्त है।

14. बिहार कोषागार संहिता में निहित प्रावधानों के आलोक में बजट प्रावधान के अंतर्गत ही राशि की निकासी की जाय।

15. वित्त विभाग के संकल्प संख्या-4-45/94-301 दि (2) दिनांक 31.01.1995 एवं वित्त विभाग के पत्रांक स्कीन (8)-11-2005-5090 दि (2) दिनांक 15.09.05 एवं 295 दिनांक 24.03.15 के आलोक में तथा वित्त विभाग के संकल्प सं- 96 दिनांक 03.01.2008 में निहित निर्देशों का अक्षरशः पालन किया जाय तथा बिहार वित्त नियमावली के सुसंगत प्रावधानों के आलोक में योजना में सम्बंधित राशि की संप्रदायता के आधार पर व्यय की जाय। यह आदेश आंतरिक वित्तीय सलाहकार की सहमति प्राप्त कर निर्गत किया जा रहा है। आंतरिक वित्तीय सलाहकार की सहमति सचिका सं- मु 30-4 (मु) नाबार्ड-03-39/2017 के पृष्ठ संख्या-15/टि 07 दिनांक- 28.4.17 को प्राप्त है।

16. यह राशि उत्ती नद में खर्च की जायेगी, जिसके लिए पुनर्विनियोजित की गयी है, अन्य में नहीं।

17. योजना के लिए संबंधित कार्यपालक अभियंता से वित्तीय कार्य योजना मांगी जायेगी एवं प्राकृतन की विशेषताओं के अनुसार निर्धारित समय सीमा के अंदर कार्य पूर्ण करना सुनिश्चित किया जाय।

18. योजना के कार्यान्वयन के क्रम में इनका निर्धारित निरीक्षण (नियमित अंतराल पर) अनिवार्य रूप से किया जाय तथा प्रतिवेदन अभिलेखबद्ध किया जाय।

19. वित्त विभाग के पत्रांक-770, दिनांक 20.09.11 के द्वारा सूचित किया गया है कि नाबार्ड से RIDF के अन्तर्गत नई परियोजनाओं की प्रशासनिक अनुमोदन प्राप्त करने के उपरान्त ही स्वीकृति हेतु नाबार्ड को भेजी जाये।

विश्वासनाजन

हो/-
(संजय कुमार)
अपर सचिव

ज्ञापक- मु 30-4 (मु)-नाबार्ड-03-39/2017

/पटना, दिनांक-

प्रतिलिपि- सभी संबंधित कोषागार पराधिकारी, जिला कोषागार/उप कोषागार को सूचना एवं आवश्यक कार्रवाई हेतु प्रेषित।


हो/-
अपर सचिव

ज्ञापक- मु 30-4 (मु)-नाबार्ड-03-39/2017

/पटना, दिनांक- 05/05/17

प्रतिलिपि- माननीय मंत्री के आरा सचिव, ग्रामीण कार्य विभाग/प्रधान सचिव, योजना एवं विकास विभाग/वित्त विभाग (आय-व्यय शाखा)/आंतरिक वित्तीय सलाहकार, ग्रामीण कार्य विभाग/नॉर्मंडल सचिवालय एवं समन्वय विभाग/कार्मिक एवं प्रशासनिक सुधार विभाग, सभी संबंधित प्रमंडलीय आयुक्त/सभी संबंधित जिला पराधिकारी/सभी संबंधित उप विकास आयुक्त/अभियंता प्रमुख एवं ग्राम कान वि०, बिहार, पटना/सभी संबंधित मुख्य अभियंता, पटना, ग्रामीण कार्य विभाग/मु 30-4 (मुख्यालय), ग्राम कान वि०/सभी संबंधित अधीक्षण अभियंता, ग्राम कान वि०, कार्य अंचल/सभी संबंधित कार्यपालक अभियंता, ग्राम कान वि० कार्य प्रमंडल/मुख्य महाप्रबंधक नाबार्ड, बिहार क्षेत्रीय कार्यालय, (मौला कम्पलेक्स, पॉपदी नजिर) डाक बंगला रोड, पटना को सूचना एवं आवश्यक कार्रवाई हेतु प्रेषित। अतिरिक्त नोट, ग्रामीण कार्य विभाग को विभाग के वेबसाइट पर अपलोड करने हेतु प्रेषित।

अपर सचिव

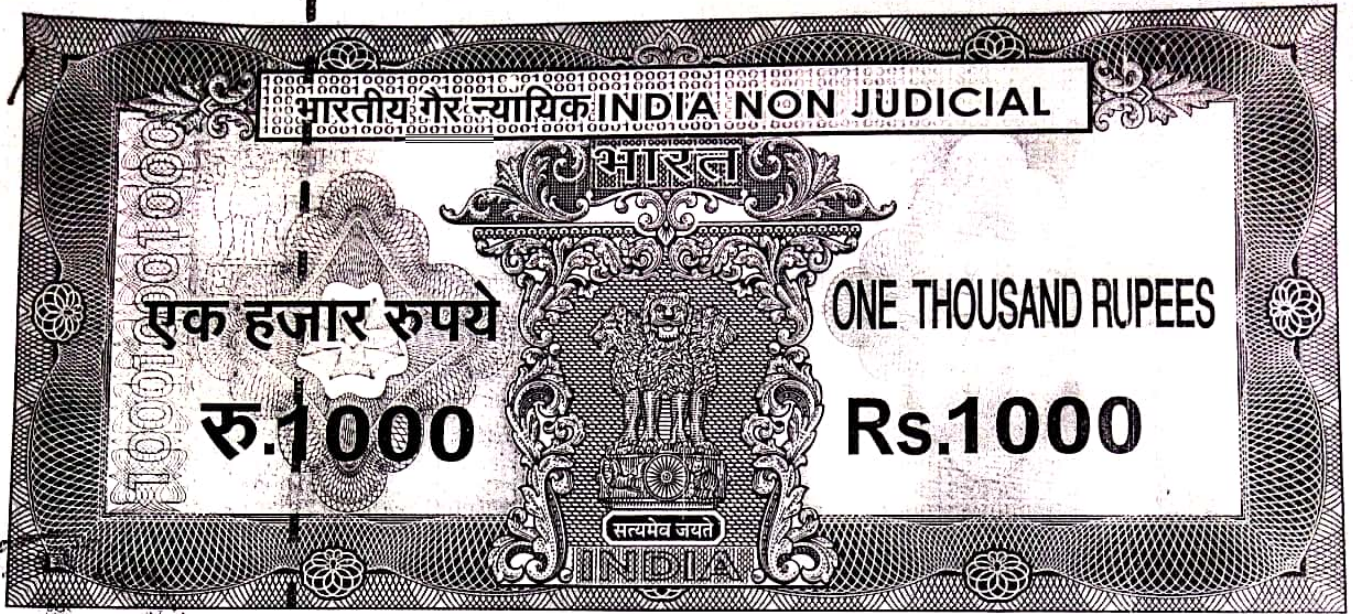

बिहार BIHAR
10 JUL 2018

Z 891260

क्रमांक 4198 दिनांक 27-7-18
श्री/श्रीमती. श्री. राजेश कुमार
ग्राम/मुहल्ला. धोबी टोला समुदायिक भवन
पिन. 241101
मुद्रांक विक्रय विभाग
मुद्रांक विक्रय विभाग
मुद्रांक विक्रय विभाग

Certified copy

Executive Engineer
R.W.D. WORKS DIVISION
MUZAFFARPUR EAST-1

REVISED AGREEMENT FORM

The Agreement No. 60SBD/2017-18 made earlier of construction of Patsara Dhobi Tola Samudaiyk Bhawan to Baijnathpur of Rs.1,49,94,728 00 between Executive Engineer R.W.D. Works Division, Muzaffarpur East-1 (name and address of Employer) hereinafter called "the employer" and Ranjeet Thakur, Village - Patsara, P.S. - Piar, Distt. - Muzaffarpur, hereinafter called "the contractor" on the other part is revised to Rs. 1,56,23,520.00 (Rs One Crore Fifty Six Lakh Twenty Three Thousand Five Hundred Twenty Only) on this day the 16.08.2018 as a result of revision of BOQ by Supretending Engineer, RWD Work Circle Muzaffarpur on 14.08.2018. (Memo No.1486 dt.14.08.2018)

रंजीत ठाकुर

sd
Executive Engineer
R.W.D. Works Division
Muzaffarpur East-1

16/8/18

अधीक्षण अभियंता का कार्यालय
ग्रामीण कार्य विभाग, कार्य अंचल, मुजफ्फरपुर।

पत्रांक

1486 अक

मुज0/

दिनांक 14/08/2018

प्रेषक,

अधीक्षण अभियंता
ग्रामीण कार्य विभाग
कार्य अंचल, मुजफ्फरपुर।

सेवा मे,

कार्यपालक अभियंता
ग्रामीण कार्य विभाग
कार्य प्रमंडल, मुजफ्फरपुर पूर्वी-1

विषय:- पुनरीक्षित परिमाण-विपत्र अनुमोदन के संबंध मे।

प्रसंग:- आपका पत्रांक-1574 दिनांक-31.07.2018।

महाशय,

उपर्युक्त विषयक प्रासांगिक पत्र से प्राप्त परिमाण विपत्र अनुमोदनोपरांत लौटाई जाती है।

S.N o.	Block	Scheme	Name of Road	Length (km)	Revised Bill of Quantity with Maintenance Approved
1	Bandra	NABARD	Patsara Dhobi Tola Samudaiyk Bhawan to Baijnathpur	2.49	1,56,23,520.00
2	Bandra	MMGSY	Chandauli to Malanga	1.66	92,74,010.00

अनु0:-यथोक्त।

विश्वासभाजन

अधीक्षण अभियंता
ग्रामीण कार्य विभाग, कार्य अंचल
मुजफ्फरपुर।

रंजीत राकुर

Executive Engineer
R.W.D. Works Division
Muzaffarpur East-1

BILL OF QUANTITY

Name Of Work : Construction of Road & CD Works for Patsara Dhobi Tola Samudaiyk Bhawan to Baijnathpur

SCHEDULE OF WORKS

Sl. No.	Description of work	No. or Qty.	Unit	Estimated Rate	AMOUNT Rs. P
1	Setting out :- Setting out as MORD specification 100 Item Nos (i), (ii), (iii) & (iv)				
	Construction of Reference & Working Benchmarks	2.490	Km	4063.960	10119.00
	Construction of Reference Pillars/Burjees	2.490	km	1862.100	4637.00
2	Clearing & Grubbing Road Land Clearing and grubbing road land including uprooting wild vegetation, grass, bushes, shrubs, saplings and trees of girth upto 300mm, removal of stumps of such trees cut earlier and disposal of unserviceable materials and stacking of serviceable material to be used or auctioned, upto a lead of 1000m including removal and disposal of top organic soil not exceeding 150mm in thickness as per Technical Specification Clause 201.				
	(i) By Manual Means				
	(A) In area of non-thorny jungle.	1.000	Hect	45966.850	45967.00
3	Construction of Embankment with Material obtained from Roadway cutting. Construction of embankment with approved materials deposited at site from roadway cutting and excavation from drain and foundation of other structures graded and compacted to meet requirement of Tables 300.1 and 300.2 as per Technical Specification Clause 301.5	9835.904	Cum	129.4979	1273729.00
4	Excavation for road work in soil by Mechanical Means including cutting and pushing the earth to site of embankment up to a distance of .00m including trimming bottom and side slopes in accordance with requirement of lines, grades and cross sections.	258.450	Cum	28.710	7420.00
5	Construction of embankment with approved material obtained from borrow pits with a lift upto 1.5m transporting to site, spreading, grading to required slope and compacting to meet requirement of Tables 300.1 and 300.2 with a lead upto 1000m as per Technical Specification Clause 301.5.	447.050	Cum	159.310	71220.00
6	Box cutting for pavement construction Excavation for roadway in soil using manual means for currying of cut earth to embankment site with a lift upto 1.5m and lead upto 100m as per Technical Specification clause 302.3	258.450	Cum	113.290	29280.00
7	Granular sub-base with Well Graded Material. Construction of granular sub-base by providing well graded material (Crushed stone Aggregates and Local sand), spreading in uniform layers with Tractor grader on prepared surface, mixing by mix in place method with rotavator at OMC, and compacting with three wheel 80-100 kn Static roller capacity to achieve the desired density, complete as per Technical Specification Clause 401.	1382.270	Cum	3372.960	4662341.00
	For Grading I Material				
8	WBM Grading 3. Providing, laying, spreading and compacting stone aggregates of specific sizes to water bound macadam specification including spreading in uniform thickness with Tractor grader, rolling with three wheel 80-100KN static roller in stages to proper grade and camber, applying and brooming stone screening to fill-up the interstices of coarse aggregate, watering and compacting to the required density Grading 3 as per Technical Specification Clause 405.	736.850	Cum	3908.000	2879610.00
	(A) By Manual Means				
9	Laying brick soling layer on prepared sub-grade with brick on end edging according to lines, graded and cross-section shown on the drawing filling joints with local sand, spreading 25mm thick layer of earth over brick soling, watering and rolling the same with three wheel road roller 80-100 KN as per Technical Specification Clause 412.	100.00	Sqm	630.910	63091.00
10	Prime Coat (Low Porosity) Providing and applying primer coat with bitumen emulsion (SS-1) on prepared surface of granular base including cleaning of road surface and spraying primer at the rate of 0.70 - 1.0 Kg./Sqm. Using mechanical means as per Technical Specification Clause 502.	9333.380	Sqm	47.520	443522.00
11	Tack Coat : Providing and applying tack coat with Bitumen emulsion (RS-1) using emulsion distributor at the rate of 0.25-0.30kg per sqm on the prepared granular surfaces treated with primer & cleaned with Hydraulic broom as per Technical Specification Clause 503.	9333.380	Sqm	15.790	147374.00

इंजीनियर अकबर

Executive Engineer
R.W.D. Works Division
Muzaffarpur East-1

	Description of work	No. or Qty.	Unit	Estimated Rate	AMOUNT Rs. P
12	Mix Seal Surface : Providing laying and rolling of close - graded premix surface material 20 mm thickness composed of 11.2 mm to 0.9 mm (Type - A) or 13.2 mm to 0.9 mm (Type - B) aggregates using penetration grade bitumen to required line, grade and level to serve as static roller and finishing to required level and grades as per Technical Specification Clause 509	9333.380	Sqm	218.08 226.490	2035429.31 2113917.00
13	Cement Concrete Pavement M30 Construction of un-reinforced, dowel jointed at expansion and construction joint only, plain cement concrete pavement, thickness as per design, over a prepared sub-base with 43 grade cement or any other type as per Clause 1501.2.2 M-25 (Grade), Coarse and fine aggregates conforming to IS:383, maximum size of coarse aggregate not exceeding 25mm, mixed in a concrete mixer of not less than 0.2cum capacity and appropriate weigh batcher using approved mix design, laid in approved fixed side formwork (steel channel, laying and fixing of 125 micron thick polythene film, wedges, steel plates including levelling the forwork as per drawing), spreading the concrete with shovels, rakes, compacted using needle, screed and plate vibrators and finished in continuous operation including provision of contraction and expansion, construction joint, applying debonding strips, primer, sealant, dowel bars, near approaches to bridge/culvert and construction joints, admixtures as approved curing of concrete slabs for 14 days, using curing compound (where specified) and water finishing to lines and grade as per drawing and Technical Specification Clause 1501	78.600	Cum	7408.430	582303.00
14	Kilometre Stone Reinforced cement concrete M-15 grade kilometre stone / local stone of standard design as per IRC-8 fixing in position including painting and printing etc. as per drawing and Technical Specification Clause 1703.				
	Ordinary Kilometre Stone (Precast)	3	Each	2397.510	7193.00
	200m Stone (Precast)	10	Each	639.160	6392.00
15	Boundary Pillar Reinforced cement concrete M15 grade boundary pillars/local stone of standard design as per IRC:25, fixed in position including finishing and lettering but excluding painting as per drawing and Technical Specification Clause 1704	49	Each	520.520	25505.00
16	Painting Two Coats on New Concrete Surface Painting two coats including primer coat after filling the surface with synthetic enamel paint in all shades on new plastered/concrete surfaces as per drawing and Technical specification clause 1701 (for Culverts)	156.24	Sqm	100.380	15683.00
17	Printing new letters and figures of any Shade Printing new letter and figures of any shade with synthetic enamel paint black of any other approved colour to give an even shade as per drawing and Technical specification Clause 1701. (ii) English and Roman (for Culverts)	616	Per cm ht. per letter	0.490	302.00
18	Providing and Fixing 'PMGSY sign board and Logo' of PMGSY Project (A) PMGSY Sign Board MMGSY Informatory Sign Board with logo : Providing and fixing of typical PMGSY Informatory sign board with Logo as per MORD specifications and drawing. Three MS Plates of 1.6 mm thick, top and middle plate duly welded with MS flat iron 25mm x 5m size on back on edges. The lower plate will be welded with MS angle iron frame of 25mm x 25mm x 5mm. The angle iron frame of the lower most plate and flat iron frame of middle plate will be welded to 2 nos. 75mm x 75 mm of 12 SWG sheet tubes posts duly embedded in cement concrete M-15 grade blocks of 450mm x 450mm x 600mm, 600mm below ground level. The top most diamond plate will be welded to middle plate by 47mm x 47mm of 12 SWG steel plate tube. All M.S. will be stove enameled on both sides. Lettering and printing arrows, border etc. will be painted with ready mixed synthetic enamel paint of superior quality in required shade and colour. All sections of framed posts and steel tube will be painted with primer and two coats of epoxy paint as per drawing Clause 1701 and Annexure 1700.1	2	Each	10905.000	21810.00
19	Retro-reflectorised Traffic Signs Providing and fixing of retro-reflectorised cautionary, mandatory and informatory sign as per IRC:67 made of encapsulated lens type reflective sheeting vide Clause 1701.2.3 fixed over aluminium sheeting, 1.5 mm thick supported on a mild steel angle iron post 75 mm x 75 mm x 6 mm firmly fixed to the ground by means of properly designed foundation with M15 grade cement concrete 450 mm x 450 mm x 600 mm, 600 mm below ground level as per drawings and Technical Specification Clause 801600 mm equilateral triangle SOR Item No.-10.2 A (1)				
	(ii) 600mm equilateral triangle	8	Each	3995.260	31962.00
	(v) 600mm x 450mm rectangular	2	Each	5385.070	10770.00
	(vii) 900mm side octagon	2	Each	10073.340	20147.00
20	Road marking with hot applied thermoplastic compound with Reflecting Glass Beads on Bituminous Surface.	478.00	Sqm	829.000	396262.00

इंजीनियर शर्मा

Executive Engineer
R.W.D. Works Division
Muzaffarpur East-1

Description of work		No.or Qty.	Unit	Estimated Rate	AMOUNT Rs. P
21	Cable Duct Across the Road :- Providing and laying of a reinforced cement concrete pipe duct 300mm dia across the road (new construction) extending from drain to drain in cuts and toe of slope in fills, constructing head walls at both ends, providing a minimum fill of granular material over top and sides of RCC pipe as per IRC : 98-1997, bedded on a 0.3m thick layer of granular material free of rock pieces outer to outer distance of pipe at least half dia of pipe subject to minimum 450mm in case of double and triple row ducts, joints to be made leak proof invert level of duct to be above higher than ground level to prevent entry of water and dirt, all as per IRC 98-1997 and approved drawings.	38.00	Rmt	1107.180	42073.00
22	Dismantling of existing structures like culverts, bridges, retaining walls and other structure comprising of masonry, cement concrete, wood work, steel work, including T&P and scaffolding wherever necessary, sorting the dismantled material, disposal of unserviceable material and stacking the serviceable material with all lifts and lead of 1000 m as per Technical Specification Clause 202.				
	(B) Cement Concrete	5.70	Cum	438.420	2499.00
	(C) Reinforced Cement Concrete	16.44	Cum	1057.220	17381.00
23	Dismantling of existing structures like culverts, bridges, retaining walls and other structure comprising of brick masonry, including disposal of unserviceable material and stacking the serviceable material with all lifts and lead of 1000 m as per Technical Specification Clause 202.				
	(B) Cement Concrete	160.90	Cum	318.770	51290.00
24	Removing all types of Hume pipes and stacking within a lead of 1000 m including Earthwork and Dismantling of Masonry Works as per Technical Specification Clause 202. Upto 600 mm dia Hume pipe.	25.00	Cum	155.290	3882.00
25	Earthwork in excavation for structures as per drawing and technical specification clause 305.1 including setting out, construction of shoring and bracing, removal of stumps and other deleterious materials and disposal upto a lead of 50m dressing of sides and bottom and backfilling in trenches with excavated suitable material.	348.00	Cum	263.650	91750.00
26	Laying brick soling layer on prepared sub-grade with brick on lines, graded and cross-section shown on the drawing filling joints with sand and earth as per Technical Specification Clause 412.	23.27	Sqm	334.650	7787.00
27	Providing concrete for plain/reinforced concrete in open foundations complete as per drawing and technical specification clause 802,803,1202 & 1203 PCC M-15	38.86	Cum	5739.140	223023.00
28	Brick masonry work in cement mortar in foundation complete excepting pointing and plastering, as per drawing and technical specification Clauses 600, 1202 & 1203	196.14	Cum	6779.480	1329727.00
29	Brick masonry work in cement mortar in sub structure complete excepting pointing and plastering, as per drawing and technical specification Clauses 600, 1202 & 1203	117.31	Cum	7080.070	830563.00
30	Plain/reinforced cement concrete in substructure complete excepting pointing and plastering as per drawing and technical specification clause 802, 804, 805, 806, 807, 1202, 1204 RCC Grade M-20	10.66	Cum	7276.320	77566.00
31	Brick masonry work in cement mortar in parapet excluding pointing and plastering, as per drawing and technical specification Clauses 600, 900 & 1208.4	17.14	Cum	7016.490	120263.00
32	Plastering with cement mortar (1:4) 15mm thick on brick work in substructure as per drawing and technical specification Clauses 613 & 1204	210.06	Sqm	171.690	36065.00
33	Providing and laying reinforced cement concrete in superstructure as per drawing and technical specification clause 800, 1205 and 1205.5 (ii) RCC Grade M-25	11.41	Cum	8118.710	92634.00
34	Supplying, fitting, and placing HYSD bar reinforcement in superstructure complete as per drawing and technical specifications Clauses 1002, 1010 and 1202	1.77	MT	60925.070	107837.00
35	Backfilling behind abutment, wing wall and return wall complete as per drawings & technical specification clause 1204.3.8 (ii) Sandy Material	79.890	Cum	129.500	10346.00
36	Providing weepholes in brick masonry/stone masonry, plain/reinforced concrete abutment, wing wall, return wall with 100 mm dia AC pipe extending through the full width of the structures with slope of 1(V):20(H) towards drawing face complete as per drawing and technical specification clauses 616, 709, 1204.3.7	74.000	No	115.200	8525.00
37	Drainage spouts complete as per drawing and technical specification clauses 1209.	4	No	565.480	2262.00
38	Providing and laying reinforced cement concrete pipe NP3 for culverts on first class bedding of granular material in single row including fixing collar with cement mortar 1:2 but excluding excavation, protection works, backfilling, concrete and masonry works in head walls and parapets clause 1106. SOR Item No. 9.3(C)	37.50	Rm	4284.60	160673.00
	1000mm dia				

22/11/2022

Description of work		No. or Qty.	Unit	Estimated Rate	AMOUNT Rs. P
39	Laying (First class) bedding on well compacted sand moorum of approved granular material as per clause 1005 (First class) Bedding (II) Type B	24.35	Cum	450.73	10975.00
40	Filling in foundation trenches as per drawing and technical specification Clauses 3053.9 (i) Sand filling (Using fine sand)	38.20	Cum	450.73	17218.00
41	Providing and laying boulder apron for bed protection with stone boulders of minimum size and weight as per table 13800.1 no fragment weighing less than 25kg laid dry complete as per drawing and technical specification clause 1301	27.85	Cum	3197.46	89049.00
Total Construction Cost :					1,61,25,450.00
42	Maintenance for 1st year	1	year	101466.00	101466.00
43	Maintenance for 2nd year	1	year	119020.00	119020.00
44	Maintenance for 3rd year	1	year	274086.00	274086.00
45	Maintenance for 4th year	1	year	336868.00	336868.00
46	Maintenance for 5th year	1	year	402577.00	402577.00
Five Year Maintenance Cost :					1234017.00
Total Amount					17437961.00


 Executive Engineer
 R.W.D. Works Division
 Muzaffarpur East-1

Const. Cost - Rs. 1,61,25,450.00
 Maint. Cost - Rs. 12,34,017.00
 Rs. 1,73,59,467.00

Less 1st year maintenance Rs. 10,14,66.00
 Rs. 1,56,23,520.00
 BOB approved for Rs. 1,73,59,467.00 (As per the above figures there is a loss of Rs. 1,56,23,520.00) of Rs. 5000000.00
 fitting him the amount for the above said work.

Superintending Engineer
 R.W.D. WORKS CIRCLE
 MUZAFFARPUR

Revised BOB approved for Rs. 1,56,23,520.00 (As per the above figures there is a loss of Rs. 1,56,23,520.00) of Rs. 5000000.00
 twenty three thousand five hundred and twenty (Rs. 23,52,000.00) of Rs. 5000000.00

श्री जीव शर्मा


 Superintending Engineer
 R.W.D. WORKS CIRCLE
 MUZAFFARPUR
 19/8/18

Executive Engineer
 R.W.D. Works Division
 Muzaffarpur East-1

1. Name of the work : Construction of Road Patsara Dhoobi Tola Samudaiyk Bhawan to Baijnathpur Under NABARD.
2. No. of roads. : One
3. Length of the road. : 2.490 K.M.
4. Name of the Agency & Address : Ranjeet Thakur
Village : Patsra, P.S. : Piar
Muzaffarpur
5. Agreement No. : 60 SBQ/2017-18
6. Approval of Rate : S.E., R.W.D. Muzaffarpur, letter No. 1643 enc.
dt.15.09.2017 on 10.00 % below from
Schedule rate.
7. Agreement value of the work:-
(a) Construction cost ----- : Rs. 1,54,26,495.00
(b) Maintenance cost ----- : Rs. 12,34,017.00
Certify copy
Executive Engineer
R.W.D. Works Division
Muzaffarpur
Post-1
14/10/17
Rs. 1,66,60,512.00 Less 10.00% below from
Schedule rate.
Rs. 1,49,94,728.00
(Rupees One Crore forty nine lakh ninty four
thousand seven hundred twenty eight Only).
8. Performance security (including
earnest money) : 5.75%(Five point Seven five percent) of the
Agreement value. (Rs. 8,62,207.00)

Performance security (including earnest money) deposited by the Agency in the form of FD.NSC & KVP amounting to Rs. 8,62,207.00 The details of FD.NSC & KVP is as follow:-

(i) Punjab National Bank	FD A/c No. 625500DP00016159	Rs. 42,000.00
(ii) Punjab National Bank	FD A/c No. 625500DP00015220	Rs. 1,70,505.00
(iii) Punjab National Bank	FD A/c No. 625500DP00015211	Rs. 1,01,001.00
(iv) 5NS87DD893184 to 200	5000.00 x 17	Rs. 85,000.00
(v) 5NS87DD895201 to 05	5000.00 x 5	Rs. 25,000.00
(vi) 5NS87DD895219	5000.00 x 1	Rs. 5,000.00
(vii) 5NS87DD895221	5000.00 x 1	Rs. 5,000.00
(viii) 5NS87DD895226	5000.00 x 1	Rs. 5,000.00
(ix) 10NS09MA748315 to 24	5000.00 x 10	Rs. 50,000.00
(x) 10NS07MA357657 to 60	5000.00 x 4	Rs. 20,000.00
(xi) 10NS09MA748294	5000.00 x 1	Rs. 5,000.00
(xii) 5NS90CC454595 to 96	1000.00 x 2	Rs. 2,000.00
(xiii) 5NS88CC189178	1000.00 x 1	Rs. 1,000.00
(xiv) 6NS06EF121980	10000.00 x 1	Rs. 10,000.00
(xv) 10NS09NA249866 to 67	10000.00 x 2	Rs. 20,000.00
(xvi) KVP 01PB154218	5000.00 x 1	Rs. 5,000.00
(xvii) Punjab National Bank	FD A/c No. 625500DP00014771	Rs. 10,000.00
(xviii) Punjab National Bank	FD A/c No. 625500DP00014805	Rs. 19,000.00
(xix) Punjab National Bank	FD A/c No. 625500DP00014780	Rs. 73,600.00
(xx) Punjab National Bank	FD A/c No. 625500DP00014188	Rs. 2,08,101.00
		Rs. 8,62,207.00


(Rs. Eight lakh sixty two thousand two hundred seven Only)

रंजीत ठाकुर

9. Date of work Order : 09.09.2017
10. Date of completion : 08.09.2018* (12 Months)
11. Security Deposit : 8% (Eight percent) to be deducted from the gross amount of each running Bill.
12. Defect liability period : Five years from the actual date of completion of the work.
13. Refund of performance security and security deposit. : After five years from the actual date of completion of the work.
14. Total item of Agreement : 45(Forty five) item in each road.
Note:-S.B.D. Rules, terms and conditions will be applic5,16,012.00able.

इंजीन गुरु

sl-
Executive Engineer
R.W.D. Works Division
Muzaffarpur East-1

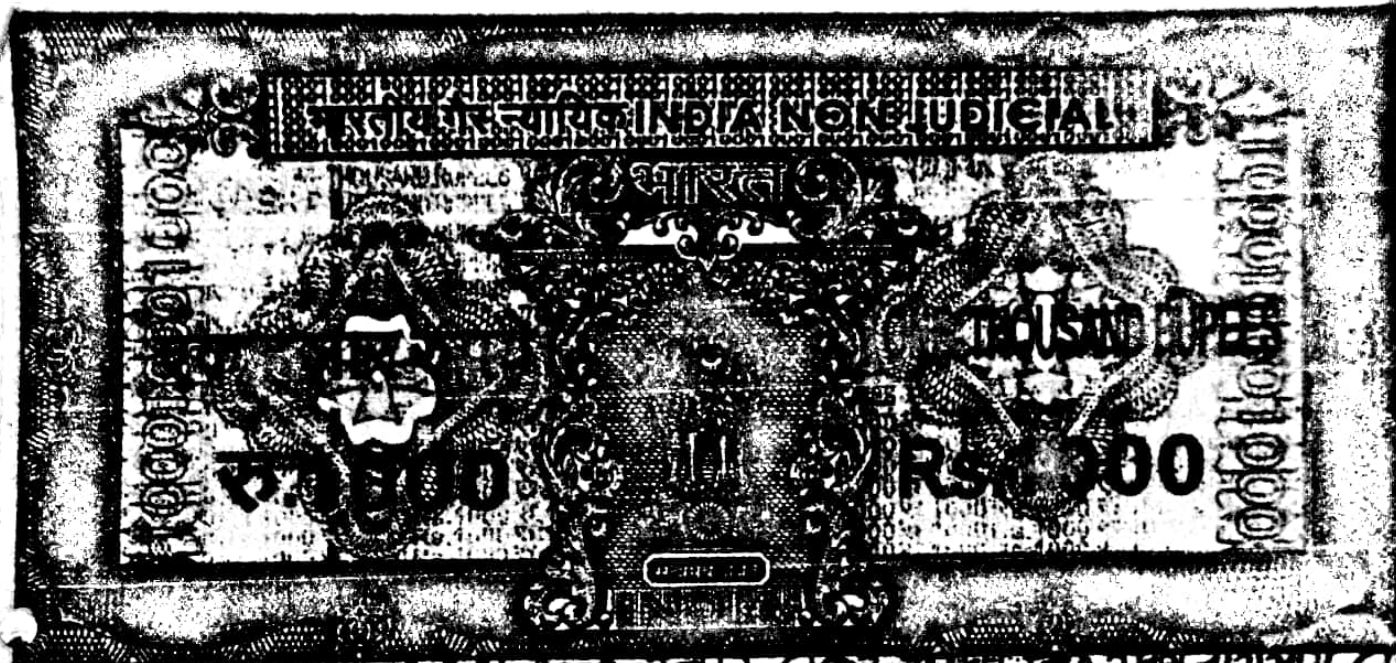

3603, द.म. 2016, 4000, राजात 61003, वि.स. वि.उ.म.नारायण 61003
पटसाडा वि.स. (मु.स.) एम.ए.ए. 951441
वि.स. (मु.स.) एम.ए.ए. 951441

AGREEMENT FORM

This Agreement made on the between Executive Engineer R.W.D. Works Division, Muzaffarpur East-1 (name and address of Employer) hereinafter called "the employer" and Ranjeet Thakur, Village : Patsra, P.S. : Piar, Muzaffarpur (name and address of contractor) hereinafter called "the contractor" on the other part.

Whereas the Employer is desirous that the contractor execute Construction of Road Patsara Dhobi Tola Samudaiyk Bhawan to Baijnathpur Under NABARD.

(name and identification number of contract) (hereinafter called 'the works') and the Employer has accepted the Bid by the contractor for the execution and completion of such works and the remedying of any defects therein, at a cost of Rs. 1,49,94,728.00 (Rupees One Crore forty nine lakh ninty four thousand seven hundred twenty eight Only).

NOW THIS AGREEMENT WITNESSETH as follows:-

1. In this Agreement, words and expression shall have the same meanings as are respectively assigned to them in the conditions of contract hereinafter referred to and they shall be deemed to form and be read and construed as part of this Agreement.
2. In consideration of the payments to be made by the Employer, the contractor as hereinafter mentioned, the contractor hereby covenants with the employer to execute and complete the works and remedy any defects therein in conformity in all aspects with the provisions of the contract.

रंजीत ठाकुर

Executive Engineer
R.W.D. Works Division
Muzaffarpur East-1

The Employer hereby covenants to pay the contractor in consideration of the execution and completion of the works and the remedying the defects wherein contract price or such other sum as may become payable under the provisions of the contract at the times and in the manner prescribed by the contract.

4. The following documents shall be deemed to form and be ready and construed as part of this Agreement viz.

- (i) Letter of Acceptance.
- (ii) Notice to proceed with the works.
- (iii) Contractor's Bid.
- (iv) Condition of contract : General and Special.
- (v) Contract Data.
- (vi) Additional condition.
- (vii) Drawings.
- (viii) Bill of Quantities and
- (ix) Any other document listed in the contract Data as forming part of the contract.

In witnessed where of the parties there to have caused this Agreement to be executed the day and year first before written.

The common seal of _____
was hereunto affixed in the presence of:

Signed, sealed and Delivered by the said _____

in the presence of:

Binding Signature of the Contractor _____

Binding Signature of the Employer _____

रंजन गजुर

sl
Executive Engineer
R.W.D. Works Division
Muzaffarpur East-1